


MANUAL OF MARINE METEOROLOGICAL OBSERVATIONS



CIRCULAR M
TENTH EDITION

QC
983
.C57
no. M
10th ed.
1959

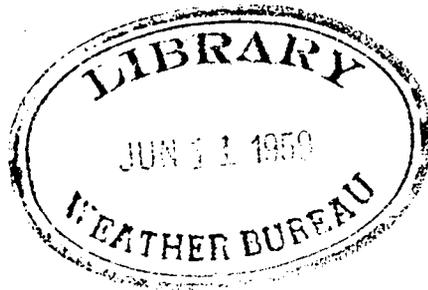

January 1959

UNITED STATES GOVERNMENT PRINTING OFFICE
WASHINGTON, D.C.

For sale by the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C. • Price \$1.25

104 854

National Oceanic and Atmospheric Administration

ERRATA NOTICE

One or more conditions of the original document may affect the quality of the image, such as:

Discolored pages

Faded or light ink

Binding intrudes into the text

This has been a co-operative project between the NOAA Central Library and the Climate Database Modernization Program, National Climate Data Center (NCDC). To view the original document, please contact the NOAA Central Library in Silver Spring, MD at (301) 713-2607 x124 or www.reference@nodc.noaa.gov.

LASON
Imaging Contractor
12200 Kiln Court
Beltsville, MD 20704-1387
March 21, 2005

AN APPRECIATION

The continuing demand for more and better weather information for ships is being met by the cooperation of the users themselves. The weather reports received from cooperating ships by mail and by radio provide the basis for the forecasts and navigation charts issued to the maritime service.

The Weather Bureau wishes to thank the masters and officers who are contributing so effectively to the success of the ocean weather service.

F. W. Reichelderfer, Chief of Bureau

CONTENTS

	<u>Page</u>
Introduction	VIII
Chapter	
I General instructions	1-3
Time of observation	3
Ship's Weather Observations--Form 615-5	4-5
Radio transmission of weather observations	6
Ordering supplies	9
Weather Bureau port offices	9-12
II Identification data	13-15
General	15
Day of month	15
Day of week (Y)	15
Octant of globe (Q)	15
Latitude ($L_a L_a L_a$)	16
Longitude ($L_o L_o L_o$)	16
Greenwich Civil Time (GG)	16-17
Ship's course (D_s)	17
Ship's speed (v_s)	17
III Wind	19-21
General	21
Wind direction	21
Wind speed	23
True wind from the apparent wind	23-27
Wind shifts	28
IV Visibility	29-31
General	31
Determination of visibility	31
Coding and entry of visibility data (VV) on Form 615-5	32
V Weather	35-37
General	37
Thunderstorms and lightning	37
Waterspouts and squalls	38
Precipitation	38-41
Fog and rime	41
Haze, smoke, and dust	41
Miscellaneous	42
Present weather (ww)	42
Past weather (W)	43

Chapter		<u>Page</u>
VI	Pressure	45-47
	General	47
	Aneroid barometers	47-48
	Barograph, Marine type	49-53
	Three-hour pressure tendency	54
	Coding and entry of pressure data (app) on Form 615-5.....	54-57
VII	Temperature	59-61
	General	61
	Air-temperature measurements	61-65
	Sea-water temperature readings	65
	Coding and entry of temperature data on Form 615-5	66
VIII	Clouds	67-69
	General	69
	Determination of sky cover	69
	Cloud height	69-70
	Coding and entry of cloud data on Form 615-5....	70-78
XI	Waves.....	79-81
	General	81
	Wave direction	82
	Wave period	82-83
	Wave height	83-84
	Coding and entry of wave data on Form 615-5....	84-88
X	Ice	89-91
	General	91
	Ice observation.....	91
	Coding and entry of ice data on Form 615-5	92

OBSERVATION TABLES

Table		
1-1	Elements of the code	8
3-1	Determination of wind speed by sea condition	22
3-2	Apparent wind speed	23
4-1	Distance to object on the horizon at sea	31
5-1	Intensity of rain	39
5-2	Intensity of snow	39

CODE TABLES

Table		<u>Page</u>
1	Symbol Y. --Day of the week	98
2	Symbol Q. --Octant of the globe	98
3	Symbol N. --Fraction of the celestial dome covered by clouds, in eighths	98
	Symbol N _h . --Amount of C _L clouds	98
4	Symbol dd. --True direction from which wind is blowing..	99
	Symbol d _w d _w . --Direction from which waves are coming..	99
5	Symbol VV. --Visibility	99
6	Symbol ww. --Present weather	100
7	Symbol W. --Past weather	102
8	Symbol PPP. --Corrected barometric pressure	103
9	Symbol C _L . --Clouds of types stratocumulus, stratus, cumulus, and cumulonimbus	104
10	Symbol h. --Height of base of lowest C _L (or C _M) cloud above sea	105
11	Symbol C _M . --Clouds of types altocumulus, altostratus, and nimbostratus	105
12	Symbol C _H . --Clouds of types cirrus, cirrostratus, and cirrocumulus	106
13	Symbol D _s . --Ship's course	107
14	Symbol v _s . --Ship's speed	107
15	Symbol a. --Barometer change characteristics in the last 3 hours	107
16	Symbol pp. --Amount of barometric change in last 3 hours	108
17	Symbol P _w . --Period of waves	109
18	Symbol H _w . --Mean maximum height of waves	109
19	Symbol c ₂ . --Description of kind of ice	110
20	Symbol K. --Effect of ice on navigation	110
21	Symbol D _i . --Bearing of ice limit	110
22	Symbol r. --Distance to ice from reporting ship	111
23	Symbol e. --Orientation of ice limit	111

MISCELLANEOUS TABLES

24	Celsius (centigrade) to Fahrenheit temperatures	112
25	Temperature of dew point in degrees Fahrenheit	114
26	Millimeters to millibars	122
27	Correction of mercurial barometer for temperature	123
28	Reduction of barometric reading to mean sea level	124
29	Reduction of mercurial barometer to standard gravity	124
30	Q-Code Signals (selected)	125

CHARTS

	<u>Page</u>
Chart	
1 Greenwich and local time	127

LIST OF ILLUSTRATIONS

Figure		
1 Ship's Weather Observations--Form 615-5.....		4-5
2 Surface wind at sea--Form 1209.....		25
3 Plotting board for finding true wind at sea		26
4 Non-uniform visibility.....		32
5 Aneroid barometer.....		48
6 Barograph, Marine Model G-220.....		50
7 Barograph chart		51
8 Barograph, Marine W. B. Model G-222.....		53
9 Sling psychrometer.....		62
10 Psychrometer (Portable, Aspirated, Electric)		63
11 Section of trace from wave recorder		81
12 Wave length and height		83

INTRODUCTION

The Conference of Brussels, called in 1853, was the first International Maritime Conference ever held. It sponsored the idea that governments should foster systematic weather observations on ships, and should prepare and publish charts of the prevailing winds, ocean currents, average sea and air temperatures, and tracks of dangerous storms based on the additional data. With the introduction of radio and fast ships, weather information became of vital importance to safe and efficient ship operation. Many countries began regularly scheduled weather forecasts to ships in nearby waters.

Today, weather forecasts as well as charts are prepared from data collected through ship observations. Forecasts of weather and sea conditions are prepared for ship operation, air-sea rescue missions, over-water air travel, military operations, etc. The need for accurate data is apparent, since the forecast cannot be any better than the basic observation.

Organization of the Manual. This manual has been designed to serve primarily as a guide in the taking of weather observations at sea. It will be helpful in using the manual to keep in mind that the material in it has been organized to accord with the order of the various elements of the observation as they are entered in the basic Weather Bureau Form 615-5, "Ship's Weather Observations." Each major element of the observation is completely covered in a separate chapter. The first portion of each chapter is presented from the point of view of observing and evaluating the element without reference to its ultimate use; and the second portion, from the point of view of making a permanent record of it and preparing it for dissemination (coding).

CHAPTER I. GENERAL INSTRUCTIONS

CONTENTS

	<u>Page</u>
Time of observation.....	3
Synoptic reports	3
Beginning and ending of synoptic observations	3
Special reports.....	3
Ship's Weather Observations - Form 615-5	4-5
General	4
Entry of data.....	4-5
Sea and swell	6
Observer's initial	6
Mailing.....	6
Radio transmission of weather observations.....	6
Ships authorized to transmit scheduled message	6
Special reports.....	6
Transmission to shore stations	6
Meteorological Radiotelegram, W.B. Form 630-9	6
Code for transmission	7-9
Ordering supplies	9
Addresses of Weather Bureau Marine Centers and Port Offices	9-12

OBSERVATION TABLES

Table 1-1. - Elements of the code	8
---	---

FIGURES

Figure 1. - Ship's Weather Observations - 615-5.....	4-5
--	-----

CHAPTER I. GENERAL INSTRUCTIONS

1000. TIME OF OBSERVATION

1010. **SYNOPTIC REPORTS.** Cooperating ships at sea are requested to take and record synoptic weather observations at the hours of 0000, 0600, 1200 and 1800 Greenwich Civil Time (G.C.T.). If it is not possible to make four observations daily, as many observations as it is convenient to make are requested. Weather observations should be made to within 50 miles of the coast except in sparsely traveled areas. When coasting along the east and west coasts of Central America and Alaska, reports are requested regardless of the ship's distance from shore.

1011. **BEGINNING AND ENDING OF SYNOPTIC OBSERVATIONS.** Observations may be started twenty minutes before the hour and completed with the pressure observation on the hour.

1020. **SPECIAL REPORTS.** In accordance with the International Convention for the Safety of Life at Sea, the masters of all ships, regardless of the nationality, are requested to send special weather observations by radio when encountering tropical or other severe storms during the period of June to November in the following areas:

- (1) In the North Atlantic Ocean, Caribbean Sea, and Gulf of Mexico between latitude 3°N . and west of longitude 35°W .
- (2) In Pacific waters west of Central America and Mexico in the area latitude 5°N . to 35°N . and east of the 180th meridian.
- (3) In the Western Pacific Ocean between latitudes 5°N . and 25°N . and from the 180th meridian to longitude 135°E .

Messages should be transmitted in the "International Code for Radio Weather Reports from Ships." Ships in North Atlantic waters should address messages to "Observer Washington" and those in eastern Pacific waters to "Observer San Francisco." Messages should be sent to U. S. Government or commercial shore stations. In western North Pacific waters address messages to "Fleet Weather Central Guam" for dispatch to station NPN. If NPN cannot be contacted messages should be readdressed to "Weather Manila" and sent via stations DZC, DZG or DZR in the Philippine Republic. Charges on these messages will be paid for by the meteorological service to which the messages are addressed.

1021. When a tropical storm is reported, the Weather Bureau may broadcast requests for special radio weather reports from all ships in the vicinity of the storm. These requests will always include instructions relative to the time and frequency of the reports and the address to which the reports should be sent.

MANUAL OF MARINE METEOROLOGICAL OBSERVATIONS

NAME OF VESSEL <input checked="" type="checkbox"/> S/S <input type="checkbox"/> M/V <i>BARRACOSSA</i>				NAME OF CAPTAIN <i>J. R. LEE</i>				VMS Form 615-5 (1-17-58) Revised 1-1-59				U. S. DEPARTMENT WEATHER B										
NATIONALITY <i>UNITED STATES</i>				V O Y A G E FROM <i>HAMBURG</i> TO <i>NEW YORK</i>				SHIP'S WEATHER														
MONTH <i>FEBRUARY</i>				19 <i>59</i>				PRESSURE				CLOUDS										
DAY OF MONTH (0-31)	DAY OF WEEK (0-7)	POSITION OF SHIP			TIME (00-23) (0-1)	WIND		VISI- BILITY (0-10)	WEATHER		BAR. NO. <i>113 984</i>	CORRECTION <i>+ .04</i>	DATE COMPARED <i>1/6/59</i>	AIR TEMP. (°C)	CLOUDS							
		OCEANIC (0-1, 2, 3, 4, 5, 6, 7, 8)	LATITUDE (Degrees and tenths)	LONGITUDE (Degrees and tenths)		DIREC- TION (True) (00-36)	SPEED (Knots) (0-36)		PRESENT (00-99)	PAST (0-9)					BAROMETER AS READ (in. mb. or mm.)	BAROMETER CORRECTED (in. mb. or mm.)	BAROMETER CORRECTED (in. mb. or mm.)	18 (0-10)	19 (0-10)	20 (0-10)	21 (0-10)	22 (0-10)
1	4	0	493	066	00	6	26	14	97	21	6	29.68	29.72	10	064	48	4	5	4	2	0	
1	4	0	485	091	06	6	28	19	98	03	2	29.77	29.81	10	095	54	2	5	5	2	0	
1	4	0	477	117	12	8	30	28	94	50	5	29.96	30.00	10	159	54	6	5	4	2	X	
1	4	0	467	140	18	8	32	30	94	61	6	30.01	30.05	10	176	51	4	6	3	3	X	
2	5	0	452	150	00	7	34	22	94	61	6	30.04	30.08	10	186	50	5	6	3	3	0	
2	5	0	452	170	06	6	12	19	95	40	6	29.89	29.93	10	135	53	3	6	2	3	1	
2	5	0	446	192	12	7	18	18	97	02	1	29.85	29.89	10	122	57	3	5	4	3	0	
2	5	0	444	216	18	6	20	19	98	02	1	29.90	29.94	10	139	51	2	5	5	3	4	
3	6	0	434	242	00	6	28	24	97	02	1	29.95	29.99	10	156	49	2	5	3	5	5	
3	6	0	431	274	06	9	27	20	93	47	4	29.89	29.93	10	135	49	9	X	0	X	X	
3	6	0	426	296	12	6	27	18	93	42	4	29.91	29.95	10	142	53	6	6	2	0	0	
3	6	0	422	322	18	6	29	17	94	63	4	29.86	29.90	10	125	53	3	7	3	2	0	
4	7	0	422	338	00	8	30	15	94	63	6	29.83	29.87	10	115	54	4	7	2	2	X	
4	7	0	413	352	06	7	30	18	96	60	6	29.76	29.80	10	091	52	2	6	4	2	0	
4	7	0	413	374	12	6	27	13	98	01	6	29.79	29.83	10	102	49	1	5	5	3	0	

Figure 1. - Ship's Weather Observations-Form 615-5

1100. SHIP'S WEATHER OBSERVATIONS-FORM 615-5

1110. GENERAL. All weather observations made at sea will be recorded on Form 615-5, Ship's Weather Observations. To assist coding weather data, a complete International Ship's Weather Code and Cloud Code Chart are included with each pad of Form 615-5. The individual sheets, when used, may be torn off along the perforation and stored in the back of the folder until the end of the trip.

A new page of Form 615-5 will be started:

- (1) At the beginning of each voyage.
- (2) As each page becomes filled.
- (3) For the first observation of a new month.
- (4) Upon sailing from one ocean to another.

1120. ENTRY OF DATA. Enter the observations as legibly as possible, using a well sharpened black pencil or a pen. The data should be entered in the columns appropriate to them as indicated by the column headings.

1121. Fill in the identification blanks on both sides of the form. These include the following:

- (1) VESSEL. - Enter name and type of vessel.

1122. **SEA AND SWELL.** When both sea and swell are observed, both systems are to be recorded in Form 615-5 and included in the coded weather message on Form 630-9. The swell group is to follow the wave group. The sea (wave) data will be entered in the upper half of columns 34, 35 and 36, and the swell data in the lower half.

1130. **OBSERVER'S INITIALS.** The initials of the observer taking the observation will be entered on the appropriate line in column 44.

1140. **MAILING.** At the completion of each trip all Forms 615-5, which have one or more entries, and used barograph charts should be mailed promptly in the postage-free envelopes provided. Instructions for mailing the records are printed on the envelopes.

1200. RADIO TRANSMISSION OF WEATHER OBSERVATIONS

1210. **SHIPS AUTHORIZED TO TRANSMIT WEATHER OBSERVATION MESSAGES BY RADIO.** Weather Bureau Marine Centers will designate the ships that are authorized to transmit by radio, 0000, 0600, 1200 and 1800 G.C.T., weather observation messages to United States and foreign meteorological service ship collection centers. Meteorological ship collection centers to which these regular weather observation messages should be addressed from all ocean areas are contained in Weather Bureau publication entitled, "United States and Foreign Radio Coast Stations Accepting Ships' Weather Messages."

1220. **SPECIAL REPORTS.** All ships are requested to transmit a special weather message under the conditions described in paragraphs 1020 and 1021.

1230. **TRANSMISSION TO SHORE STATIONS.** Weather observation messages addressed to "Observer Washington" and "Observer San Francisco," from ships in western North Atlantic and eastern North Pacific waters, respectively, should be checked "Government" and transmitted to the nearest United States Government or commercial shore station. The Weather Bureau will assume the cost for transmitting weather messages to these addresses.

1240. **METEOROLOGICAL RADIOTELEGRAM.** WB Form 630-9. The Weather Bureau supplies meteorological radiotelegram blanks for convenience in transmitting weather observation messages by radio. After the message is transmitted the form may be disposed of by the radio operator. It should not be mailed to the Weather Bureau.

1241. The coded weather message will be copied from Form 615-5 to Form 630-9.

1250. CODE FOR TRANSMISSION. Weather messages will be encoded in the International Code for Radio Weather Reports from Ships, as indicated below. Each element in the coded weather observation message is indicated by one or more symbol letters. The symbolic form of the code (FM21A) is as follows:

YQL _a L _a L _a	L _O L _O L _O GG	Nddff	VVwwW	PPPTT
NhC _L hC _M C _H	D _s v _s app	OT _s T _s T _d T _d	ld _w d _w P _w H _w	
ICE c ₂ KD _i re				

Additional groups may be added in accordance with paragraphs 6422 and 9411.

1251. The symbols of the ship's code are listed and defined in Table 1-1 in the order of their appearance in the message. The relevant paragraphs and code tables in this manual are listed in adjacent columns.

1252. The "c₂KD_ire" group is used to report ice. When it is included, it must be preceded by the identifying word, "ICE".

1253. When the data for an element of the message cannot be determined, X's will be inserted, as required by the code table appropriate to the missing data, to determine five figures in each group. If data for an entire group is missing from the first seven groups of the message, five X's (XXXXX) will be reported for that group, except that 30 is added to the time in coding (GG) when the 7th group is omitted and 60 is added to (GG) when the 6th and 7th group are omitted (groups N_hC_LhC_MC_HD_sv_sapp). When all the elements of one of the groups OT_sT_sT_dT_d ld_wd_wP_wH_w ICE c₂KD_ire are missing, that group will be omitted from the coded message, instead of substituting 5X's for the group.

1253.1. When waves and swells are distinguished simultaneously at the time of observation, both systems are reported. At least two (ld_wd_wP_wH_w) groups should be included. When more than one swell system is present, more wave groups may be included in the report. Code each system separately and enter each code group in the column headed "Waves" of Form 615-5. In cases when more than two wave systems are observed, enter additional groups to the right under "Remarks."

Table 1-1. --Elements of the Code

Symbols	Definitions of symbols	Observing instructions (par. No.)	Coding instructions (par. No.)	Code Table No.
Y	Day of week	-----	2201	1
Q	Octant of globe	-----	2301	2
L _a L _a L _a	Latitude in degrees and tenths	-----	2401	--
L _o L _o L _o	Longitude in degrees and tenths	-----	2501	--
GG	Greenwich civil time of observation, to nearest hour	-----	2601	--
N	Fraction of celestial dome covered by clouds	8110-30	8310	3
dd	Direction from which the wind is blowing (tens of degrees)	3110	3120	4
ff	Wind speed in knots	3210	3220	--
VV	Visibility (in code)	4101-3	4201	5
ww	Present weather (in code)	5710	5720-32	6
W	Past weather (in code)	5810	5820	7
PPP	Sea-level pressure (tens, units, tenths) mb	6120	6410-11	8
TT	Temperature of the air (whole degrees Fahrenheit)	7110-20	7310	--
N _h	Fraction of celestial dome covered C _L or C _M cloud	8110-30	8320	3
C _L	Clouds of types stratocumulus, stratus, cumulus, cumulonimbus (in code)	-----	8340	9
h	Height of base of lowest C _L or C _M cloud above sea	8201	8330	10
C _M	Clouds of types altocumulus, altostratus, nimbostratus (in code)	-----	8350	11
C _H	Clouds of types cirrus, cirrostratus, cirrocumulus (in code)	-----	8360	12
D _s	Ship's course (in code)	-----	2701	13
v _s	Speed of ship in knots (in code)	-----	2801	14
a	Characteristic of barometric tendency (in code)	6310-30	6420-22	15
pp	Amount of barometric change (units and tenths) mb	6310-30	6420-22	16
0	Group designator	-----	-----	--
T _s T _s	Difference between sea and air temperature (whole degrees Fahrenheit)	-----	7330	--
T _d T _d	Temperature of dew point (whole degrees Fahrenheit)	7133-44	7310-12	--
1	Group designator	-----	-----	--
d _d d _w	Direction from which waves are coming (tens of degrees)	9101-2	9420	4
P _w	Period of waves (in code)	9210-20	9430	17
H _w	Mean height of waves (in code)	9310-22	9440	18
ICE	Group designator for ice group	-----	10280	--
C ₂	Description of kind of ice (in code)	10120	10220	19
K	Effect of ice on navigation (in code)	-----	10230	20
D _i	Bearing of ice limit (in code)	10130	10240	21
r	Distance of ice from ship (in code)	10130	10250	22
e	Orientation of ice field (in code)	10130	10260	23

1254. Example of a coded report: 40480 62106 62614 97267
06421 45420 56308 06120 12631 ICE 10403

<u>Code Symbols</u>	<u>Code Figures</u>	<u>Decoded Data</u>
YQL _a L _a L _a	40480	4th day of week; octant, 0; latitude, 48.0°.
L _o L _o L _o GG.....	62106	Longitude, 62.1°; time, 0600 G.C.T.
Nddff.....	62614	6 eighths of sky covered; wind direction, 260°; speed, 14 knots.

<u>Code Symbols</u>	<u>Code Figures</u>	<u>Decoded Data</u>
VVwwW.....	97267	Visibility, 5 miles; present weather, snow showers in past hour; past weather, snow.
PPPTT.....	06421	Pressure, 1006.4 mb., temperature 21°.
N _h C _L hC _M C _H ..	45420	4 eights stratocumulus; height of lowest cloud 1000-2000 feet. Altostratus or nimbostratus also present. No type C _H clouds.
D _S v _S app.....	56308	Ship's course, southwest; ship's speed 16 to 18 knots; barometer falling then rising; barometric change, 0.8 mb. higher.
OT _s T _s T _d T _d ...	06120	Group designator, 0; sea-air temperature difference, 11°; dew point 20°.
ld _w d _w P _w H _w ...	12631	Group designator, 1; wave direction, 260°; wave period, 5 to 7 seconds; wave height, 1-1/2 feet.
ICE.....	ICE	Designator for ice group.
c ₂ KD _i re.....	10403	New ice; navigation unobstructed; ice limit toward south; less than one mile distant; ice edge lying in a direction SE to NW with ice situated to the NE.

1300. ORDERING SUPPLIES

1301. Weather Bureau forms and supplies (including envelopes) may be obtained directly from any of the Weather Bureau Marine Centers and port stations listed in section 1401. These supplies may also be obtained through the mail by checking the needed items on the back of Form 615-5 in the section headed "Check Forms or Supplies Needed." When supplies are requested on Form 615-5, the ship's mailing address should be included in the space above the section for requesting supplies.

1400. ADDRESSES OF WEATHER BUREAU MARINE CENTERS AND PORT OFFICES

1401. Weather Bureau Marine Centers have personnel who visit ships in port for the purpose of checking and calibrating shipboard barometers and other meteorological instruments. In addition the port meteorologists assist the masters and mates in problems regarding weather observations, preparation of weather maps and forecasts. Meteorological manuals, forms and some instruments are also provided by the following Weather Bureau Marine Centers.

ATLANTIC AREA

Weather Bureau Office
17 Battery Place
New York 4, N. Y.

Weather Bureau Office
424 P. O. Bldg.
Norfolk, Va.

Weather Bureau Office
USCG Base, 427 Commercial St.
Boston 13, Mass.

Weather Bureau Airport Station
Box 17, Travis Field
Savannah, Ga.

U. S. Weather Bureau Airport Station
Isla Verde International Airport
San Juan, P. R.

GULF AREA

Weather Bureau Office
317 Post Office Bldg.
New Orleans 12, La.

Weather Bureau Office
1002 Federal Office Bldg.
Houston 14, Texas

PACIFIC AREA

Weather Bureau Office
Room 216 Custom House
555 Battery St.
San Francisco 11, Calif.

Weather Bureau Office
1752 Post Office Bldg.
Los Angeles 12, Calif.

Weather Bureau Office
703 Federal Bldg.
Seattle 4, Washington

Weather Bureau Office
Lindbergh Municipal Airport
San Diego 1, Calif.

Weather Bureau Office
Box 3650, Pier 2
Honolulu, T. H.

1402. The following Weather Bureau Offices or Airport Stations provide forecasts and climatological data, and will check barometers at the Weather Bureau Office:

ATLANTIC AREA

Weather Bureau Airport Station
Portland City Airport
Portland, Maine

Weather Bureau Airport Station
Atlantic City Airport
Atlantic City, N. J.

Weather Bureau Airport Station
East Boston 28, Mass.

Weather Bureau Airport Station
Providence, R. I.
T. F. Green Airport
Hillgrove, R. I.

Weather Bureau Airport Station
Municipal Airport
New Haven, Conn.

Weather Bureau Airport Station
Bridgeport Municipal Airport
Stratford, Conn.

Weather Bureau Airport Station
New Terminal Bldg., Inter. Airport
Philadelphia, Pa.

Weather Bureau Airport Station
Friendship International Airport
Baltimore, Md.

Weather Bureau Airport Station
Washington National Airport
Washington, D. C.

Weather Bureau Airport Station
Norfolk Municipal Airport
Norfolk, Va.

Weather Bureau Airport Station
Municipal Airport
Charleston, S. C.

Weather Bureau Airport Station
Imeson Municipal Airport
Jacksonville, Fla.

Weather Bureau Airport Station
International Airport
Miami, Fla.

U. S. Weather Bureau Airport Station
Isla Verde International Airport
San Juan, P. R.

GULF AREA

Weather Bureau Airport Station
Fort Myers, Fla.

Weather Bureau Office
Post Office Bldg.
Pensacola, Fla.

Weather Bureau Airport Station
Lake Charles Air Force Base
Lake Charles, La.

Weather Bureau Office
Post Office Building
Galveston, Texas

Weather Bureau Office
Federal Office Bldg.
Houston, Texas

Weather Bureau Airport Station
Tampa International Airport
Tampa, Fla.

Weather Bureau Airport Station
Bates Field Municipal Airport
Mobile, Ala.

Weather Bureau Airport Station
Jefferson County Airport
Port Arthur, Texas

Weather Bureau Airport Station
Cliff Maus Field
Corpus Christi, Texas

Weather Bureau Airport Station
International Airport
Brownsville, Texas

PACIFIC AREA

Weather Bureau Airport Station
International Airport
Anchorage, Alaska

Weather Bureau Airport Station
Custom House Building
Portland, Oregon

Weather Bureau Office
Eureka, California

Weather Bureau Airport Station
Lindbergh Municipal Airport
San Diego, California

U. S. Weather Bureau Office
Guam, M. I.

Weather Bureau Airport Station
San Francisco International Airport
San Francisco, California

Weather Bureau Airport Station
Juneau Airport
Juneau, Alaska

Weather Bureau Airport Station
Clatsop County Airport
Astoria, Oregon

Weather Bureau Airport Station
Oakland Municipal Airport
Oakland, California

Weather Bureau Airport Station
Los Angeles International Airport
Los Angeles, California

Weather Bureau Airport Station
International Airport
Honolulu, Hawaii

II IDENTIFICATION

CHAPTER II. IDENTIFICATION DATA

CONTENTS

	<u>Page</u>
General.....	15
Day of month.....	15
Day of week (Y).....	15
Octant of globe (Q).....	15-16
Latitude ($L_a L_a L_a$).....	16
Longitude ($L_o L_o L_o$).....	16
Greenwich Civil Time (GG).....	16-17
Ship's course (D_s).....	17
Ship's speed (v_s).....	17

CODE TABLES

Code Table 1. - Symbol Y--Day of week.....	15
Code Table 2. - Symbol Q--Octant of the globe.....	16
Code Table 13. - Symbol D_s --Ship's course.....	17
Code Table 14. - Symbol v_s --Ship's speed.....	17

CHAPTER II. IDENTIFICATION DATA

2000. GENERAL

2001. Each weather message must be identified in regard to the time of the report and the position of the ship taking the observation. The identification data includes the following: Day of month, day of week, octant of globe, latitude, longitude, time of report, and course and speed of the ship. These data will be entered on Form 615-5 in the columns specified in the following paragraphs.

2100. DAY OF MONTH

2101. Enter the day of the month (G.C.T.), in column 1. A new day begins at 0000 (midnight) G.C.T. The Greenwich date is not affected when crossing the International Date Line (180th meridian for most routes).

2200. DAY OF WEEK (Y)

2201. Select the code figure from Code Table 1 corresponding to the day of the week (Greenwich civil date) and enter the figure in column 2.

Code Table 1

Symbol Y. - Day of the week

Day	Code figures
Sunday.....	1
Monday.....	2
Tuesday.....	3
Wednesday.....	4
Thursday.....	5
Friday.....	6
Saturday.....	7

2300. OCTANT OF GLOBE (Q)

2301. Select the code figure from Code Table 2 for the octant of the globe corresponding to the latitude and longitude of the ship. Enter the figure in column 3.

Code Table 2

Symbol Q. - Octant of the globe

Longitude	Code figures
North latitude:	
0° W. to 89.9° W.	0
90° W. to 179.9° W.	1
180° E. to 89.9° E.	2
90° E. to 0.1° E.	3
South latitude:	
0° W. to 89.9° W.	5
90° W. to 179.9° W.	6
180° E. to 89.9° W.	7
90° E. to 0.1° E.	8

2400. LATITUDE ($L_a L_a L_a$)

2401. Enter the latitude of the ship, at the time of the observation, in degrees and tenths without decimal point in column 4. The tenths are obtained by dividing the minutes of arc by 6 and neglecting the remainder. If the group contains only two figures, add a zero as the first figure, e. g., 9.5 is entered as 095.

Examples:

- (a) $48^{\circ}20' = 48.3^{\circ}$ (i. e., $20 \div 6 = 3$, remainder neglected), which is entered as 483.
 (b) $7^{\circ}11'$ is entered as 071.

2500. LONGITUDE ($L_o L_o L_o$)

2501. Enter the longitude of the ship in degrees and tenths in column 5. The tenths of longitude are obtained in the same manner as tenths of latitude (§2401). If the longitude is 100° or more, the first figure (1) will be omitted. The octant of the globe will show that the figure has been omitted.

Example: $126^{\circ}25'$ longitude is entered as 264.

2600. GREENWICH CIVIL TIME (GG)

2601. Enter the time of the observation to the nearest hour (G.C.T.) in column 6. The time should be entered to two figures in accordance with

the 24-hour clock, e. g., 00, 06, 12, 18. Twenty-four (24) should not be used to indicate midnight, e. g., midnight of the 7-8 should be entered as 00 on the 8th. Chart 1 (at the back of this manual) gives the local time corresponding to Greenwich mean noon.

2700. SHIP'S COURSE (D_S)

2701. Select the code figure from Code Table 13 corresponding to the course (true) made good by the ship in the 3 hours preceding the time of observation, and enter the figure in column 23.

Code Table 13

SYMBOL D_S . - Ship's course (true) made good in 3 hours preceding the time of observation

Code figures	True course	Code figures	True course
0	Ship hove to	5	SW
1	NE	6	W
2	E	7	NW
3	SE	8	N
4	S	9	No information

2800. SHIP'S SPEED (v_S)

2801. Select the code figure from Code Table 14 corresponding to the average speed of the ship during the 3-hour period prior to the observation. Enter the figure in column 24.

Code Table 14

SYMBOL v_S . - Ship's average speed made good during 3 hours preceding the time of observation

Code figures	Speed	Code figures	Speed
0	Ship stopped	5	13 to 15 knots
1	1 to 3 knots	6	16 to 18 knots
2	4 to 6 knots	7	19 to 21 knots
3	7 to 9 knots	8	22 to 24 knots
4	10 to 12 knots	9	More than 24 knots

CHAPTER III. WIND

CONTENTS

	<u>Page</u>
General	21
Wind direction	21
General.....	21
Entry of wind direction data (dd) Form 615-5.....	21
Wind speed.....	23
General.....	23
Entry of wind speed data (ff) on Form 615-5.....	23
True wind from the apparent wind (vector method).....	23
General.....	23
Surface winds at sea - Form 1209.....	24
Plotting board method for computing true wind at sea	26-27
Wind shifts.....	28
General.....	28
Entry of wind shifts on Form 615-5	28
Radio reporting of wind shifts	28

TABLES

Table 3-1.--Determination of wind speed by sea condition.....	22
Table 3-2.--Apparent wind speed.....	23

CODE TABLES

Code Table 4.--Symbol dd--True direction from which wind is blowing .	21
---	----

FIGURES

Figure 2.--Surface wind at sea - Form 1209.....	25
Figure 3.--Plotting board for finding true winds at sea	26

CHAPTER III. WIND

3000. GENERAL

3001. Marine observers may determine the direction and speed of the wind from the direction and character of the ripples, waves and spray. Wind determined in this manner is termed the true wind, and will be entered in Form 615-5.

3002. The wind experienced on a moving ship is termed the apparent wind, and is the result of two motions - that of the ship and that of the air.

3003. Wind is classified as "gusty" when it is characterized by sudden, intermittent increases in speed, with at least 9 knots variation between peaks and lulls.

3100. WIND DIRECTION

3110. **GENERAL.** Wind direction is the true (not magnetic) direction from which the wind is blowing. Whenever possible, the true wind direction will be determined by observing the direction from which ripples, small waves and sea spray are coming, since they run with the wind. When the true wind direction cannot be determined in this manner, use the procedure described in paragraph 3310.

3120. **ENTRY OF WIND DIRECTION DATA (dd) ON FORM 615-5.** Select the code figures from Code Table 4 corresponding to the true wind direction (dd), and enter the two figures in column 8.

CODE TABLE 4

SYMBOL dd.—True direction, in 10's of degrees, FROM which wind is blowing (00-36)

Code figures	Direction	Code figures	Direction
00	Calm.	19	185° to 194°.
01	5° to 14°.	20	195° to 204°.
02	15° to 24°.	21	205° to 214°.
03	25° to 34°.	22	215° to 224°.
04	35° to 44°.	23	225° to 234°.
05	45° to 54°.	24	235° to 244°.
06	55° to 64°.	25	245° to 254°.
07	65° to 74°.	26	255° to 264°.
08	75° to 84°.	27	265° to 274°.
09	85° to 94°.	28	275° to 284°.
10	95° to 104°.	29	285° to 294°.
11	105° to 114°.	30	295° to 304°.
12	115° to 124°.	31	305° to 314°.
13	125° to 134°.	32	315° to 324°.
14	135° to 144°.	33	325° to 334°.
15	145° to 154°.	34	335° to 344°.
16	155° to 164°.	35	345° to 354°.
17	165° to 174°.	36	355° to 4°.
18	175° to 184°.		

NOTE.—In case the true wind speed exceeds 99 knots, 50 will be added to "dd" and only the wind speed in excess of 100 knots will be coded. For example, if direction=163° and speed=121 knots, the wind will be coded as "6621" (dd=16+50; ff=121-100).

TABLE 3-1. - Determination of wind speed by sea condition

Knots	Descriptive	Sea Conditions	Wind force (Beaufort)	Probable wave height in ft.
0-1	Calm	Sea smooth and mirror-like.	0	-
1-3	Light air	Scale-like ripples without foam crests.	1	1/4
4-6	Light breeze	Small, short wavelets; crests have a glassy appearance and do not break.	2	1/2
7-10	Gentle breeze	Large wavelets; some crests begin to break; foam of glassy appearance. Occasional white foam crests.	3	2
11-16	Moderate	Small waves, becoming longer; fairly frequent white foam crests.	4	4
17-21	Fresh	Moderate waves, taking a more pronounced long form; many white foam crests; there may be some spray.	5	6
22-27	Strong	Large waves begin to form; white foam crests are more extensive everywhere; there may be some spray.	6	10
28-33	Near gale	Sea heaps up and white foam from breaking waves begin to be blown in streaks along the direction of the wind; spindrift begins.	7	14
34-40	Gale	Moderately high waves of greater length; edges of crests break into spindrift; foam is blown in well-marked streaks along the direction of the wind.	8	18
41-47	Strong gale	High waves; dense streaks of foam along the direction of the wind; crests of waves begin to topple, tumble, and roll over; spray may reduce visibility.	9	23
48-55	Storm	Very high waves with long overhanging crests. The resulting foam in great patches is blown in dense white streaks along the direction of the wind. On the whole, the surface of the sea is white in appearance. The tumbling of the sea becomes heavy and shocklike. Visibility is reduced.	10	29
56-63	Violent storm	Exceptionally high waves that may obscure small and medium-sized ships. The sea is completely covered with long white patches of foam lying along the direction of the wind. Everywhere the edges of the wave crests are blown into froth. Visibility reduced.	11	37
64-71	Hurricane	The air is filled with foam and spray. Sea completely white with driving spray; visibility very much reduced.	12	45

3200. WIND SPEED

3210. **GENERAL.** The wind speed is the average speed in knots of the wind blowing over the surface of the sea. The speed will be determined from the size and character of the waves that are running with the wind. Table 3-1 will be used to determine the wind speed by the sea condition.

3220. **ENTRY OF WIND SPEED DATA (ff) ON FORM 615-5.** Enter two figures for the wind speed (knots) in column 9. Example: 9 knots entered as 09; 15 knots entered as 15.

3300. TRUE WIND FROM THE APPARENT WIND

3310. **GENERAL.** When the surface of the sea cannot be observed, the true wind will be determined from the apparent wind as follows:

- (a) Estimate the apparent wind direction to the nearest 10 degrees off the bow of the ship and the apparent wind speed to the nearest 5 knots by observing the effects of the wind on the ship's flag, smoke, or rigging (see Table 3-2). If the ship has an anemometer, the speed of the apparent wind may be obtained from it.
- (b) Construct a vector diagram or use Form 1209 to find the true wind (see Fig. 2).

Table 3-2. - Apparent wind speed

Speed (knots)	Indication
Less than 1 ..	Calm; smoke rises vertically.
1-3.....	Smoke drifts from funnel.
4-6.....	Wind felt on face.
7-10.....	Wind extends light flag.
11-16.....	Wind raises dust and loose paper on deck.
17-21.....	Wind waves and snaps flag briskly.
22-27.....	Whistling in rigging.
28-33.....	Inconvenience felt walking against wind.
34-40.....	Walking becomes difficult.

3311. The following may be used to check the results obtained from a vector diagram or from Form 1209:

- (a) The true direction of the wind is usually on the same side as, but farther from the bow than the apparent direction.
- (b) The true speed of the wind is greater than the apparent whenever the apparent direction is aft of the beam.

- (c) The true speed of the wind is less than the apparent whenever the true direction is forward of the beam.

3320. SURFACE WIND AT SEA--FORM 1209. This chart is designed to aid in the derivation of the true wind from the apparent wind (see Fig. 2). If a supply of the forms is desired for use aboard ship, they may be obtained from the Weather Bureau when requested in accordance with §1301.

3321. A wind scale, in knots, is printed on concentric circles that are drawn around the center of the chart. If the wind speed exceeds the printed scale, a new scale may be made by doubling or tripling the printed one. Wind direction for every 10 degrees is printed on lines that radiate from the center of the chart. The wind direction in degrees off the bow is plotted with reference to the black degree markings (top figures) printed at the ends of the radial lines. A separate slide, with a ship's-speed scale similar to the wind-speed scale used on the chart, is furnished with the forms. With the slide, the ship's speed is laid off vertically downward from the plotted point that represents the wind speed and the direction off the bow. The point plotted at the ship's speed has coordinate values representing the true wind speed and the true wind direction with respect to the ship's heading. The wind direction, in degrees off the starboard bow (0° to 360°), is read from the green-colored figures (bottom figures). The ship's heading in degrees must be added to the wind direction, as read from the chart, in order to have the true wind direction with respect to north (360°).

3322. Form 1209 is used as follows:

- (1) Select the radial line corresponding to the angle, in degrees off the bow (port or starboard), from which the wind is blowing and plot a point on it at a distance from the center (scale printed on concentric circles) equal to the speed of the apparent wind in knots.
- (2) Place the 0 (arrow point) of the ship's speed slide at the point plotted in (1) and measure the ship's speed vertically downward toward the bottom of the chart. Plot a point on the chart opposite the value on the slide corresponding to the ship's speed at the time of the wind observation.
- (3) Read the wind speed corresponding to the point plotted in (2), estimating for the values between the concentric circles. This value is the true wind speed.
- (4) Read the angular value, from the figures printed in green (bottom figures), corresponding to the radial line from the center through the point plotted in (2). Add the value of the angle to the ship's heading in degrees to obtain the true wind direction. If the total exceeds 360° , subtract 360° from it.

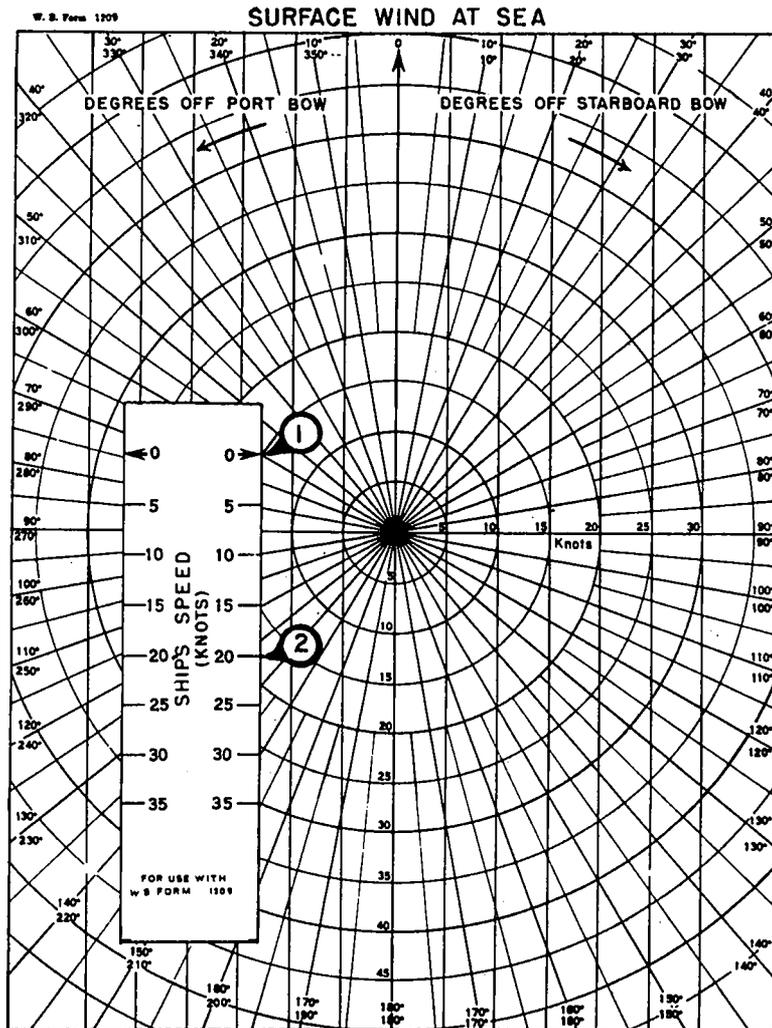


Figure 2.--Determination of true wind from the apparent wind, using Form 1209 and the associated ship's-speed scale. Given an apparent wind of 15 knots, 60° off the port bow, ship's speed 20 knots and heading 160°. Note the use of the scale in locating point 2, which is always below point 1 (the apparent wind) on a line through point 1 parallel to the vertical (green) lines on the form. The upper figures at the end of the radial lines (used in determining the direction of point 1) represent direction from 0°--180° off the bow (measured clockwise when off the starboard bow and counterclockwise when off the port bow); the lower figures (in green) are used when determining the direction of point 2, which is measured clockwise from the bow. The sum of the ship's heading and the direction of point 2 (226°) is 386°. Since this sum exceeds 360, the true wind direction is 386-360=26°.

3330. PLOTTING BOARD METHOD FOR COMPUTING TRUE WIND AT SEA. Ships that are not equipped with wind transmitting and indicating instruments should estimate the apparent wind direction and wind speed in accordance with instructions contained in paragraph 3310(a). True wind may be computed with the aid of a plotting board. Anemometer equipped vessels should obtain apparent wind direction and speed from wind indicators. The true wind may be determined from the apparent wind relative to the ship's bow, and from the course and speed of the ship.

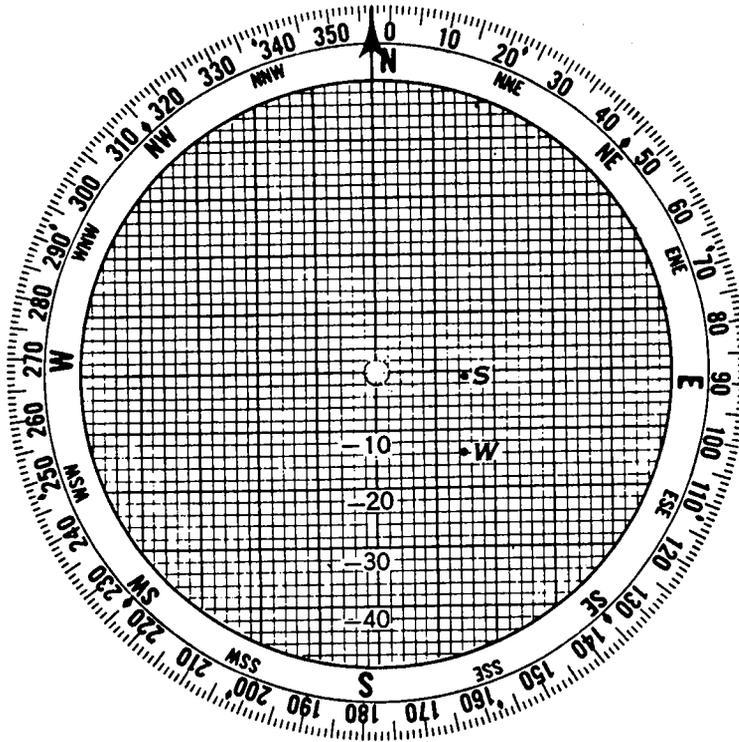


Figure 3. --Plotting board for finding true winds at sea.

3331. The apparent wind is a resultant of the true wind direction and speed or movement of the ship. The apparent wind relative to the bow of the ship is converted to a true compass bearing by adding the apparent wind direction to the ship's heading if the wind is off the starboard bow and subtracting the apparent wind direction if the wind is off the port bow;
EXAMPLE:

A - APPARENT WIND IS OFF STARBOARD BOW

(1) Ship's heading	270° true
(2) Apparent wind (relative to ship's bow).....	040°
True bearing	<u>310°</u>

B - APPARENT WIND IS OFF THE PORT BOW

(1) Ship's heading	270° true
(2) Apparent wind (relative to ship's bow)	-040°
True bearing	<u>230°</u>

3332. The procedure for computing true wind direction and speed with the aid of a plotting board follows: From the center of the board or from the pin, a scale is ruled off equal-distant on top and bottom of the scale, from 0 to 50. Should the apparent wind exceed 50 knots, the scale may be doubled and the computing procedure carried on as described. At the top of the board is a red arrow. In this discussion when referring to the top of the board, it will be with reference to this arrow. An example of how the method is used is set out below.

- (a) Ship's course and speed 270 degrees - 15 knots
- (b) Apparent wind (wind relative to ship's bow).. 040 " - 20 knots
- (c) Apparent wind converted to a true bearing... 310 "

3332.1. Set 270 degrees at the index on top of the plotting board; using any convenient linear scale, measure vertically downward from the center peg of the plotting board a distance equivalent to 15 knots. Mark this spot "S" (for ship). Rotate the protractor disk of the plotting board until 310 degrees is at the index (red arrow) at the top of the plotting board. Using the same linear scale as for ship's speed, plot vertically downward from the center peg of the plotting board a distance equivalent to 20 knots. Mark this point "W". Rotate the protractor disk until the "S" is vertically above the "W", using the vertical lines on the plotting board to line up the two points. Read the true wind direction at the TOP of the plotting board. The distance between points "S" and "W" is the true wind speed, using the same scale as in plotting the points "S" and "W". The true wind direction is 357 degrees and the speed is 13 knots.

3332.2. Anemometer equipped vessels may obtain a plotting board by request in accordance with ¶ 1301.

3400. WIND SHIFTS

3410. GENERAL. Wind shift is the manner in which the wind changes direction. It is generally considered an abrupt change of the wind direction at least 90 degrees. Wind shifts are associated with the phenomena characteristic of a cold-front passage that are listed below:

- (1) Gusty winds shifting in a clockwise direction in the Northern Hemisphere (south shifting to west, or southwest shifting to northwest), and counterclockwise in the Southern Hemisphere (north shifting to west, or northwest shifting to southwest).
- (2) Rapid drop in dew point.
- (3) Rapid drop in air temperature.
- (4) Rise in pressure.
- (5) In summer; lightning, thunder, heavy rain, and possible hail.
- (6) In winter; frequent rain or snow squalls with cloud heights changing rapidly--to either higher or lower heights than existed before the wind shift.

3411. When a fast vessel overtakes a slow-moving cold front, items 1, 2, 3, and 4 of paragraph 3410 will occur in the reverse of the manner described. For example, the wind will shift counterclockwise in the Northern Hemisphere, and the dew point will rise rapidly. However, phenomena described in items 5 and 6 may be encountered in the frontal zone.

3412. Wind shifts may occur without precipitation, but they are usually accompanied by strong winds.

3420. ENTRY OF WIND SHIFTS ON FORM 615-5. Enter the time (G. C. T.) of wind shifts that occurred during the previous 6 hours in the column headed "Remarks" on the line pertaining to the observation. Example: Wind shifted SW to NW at 0835.

3421. RADIO REPORTING OF WIND SHIFTS. Wind shifts that occur during six (6) hours prior to the standard ship's weather observation should be reported. This information is to be added, in plain language, to the regular coded ship's weather observation. EXAMPLE: SHIPS 40493 06600 62614 97216 06448 45420 56308 00347 12664 WIND SHIFTED S TO NW AT 0835Z.

CHAPTER IV. VISIBILITY

CONTENTS

	<u>Page</u>
General.....	31
Determination of visibility.....	31-32
Coding and entry of visibility data (VV) on Form 615-5.....	32-33

TABLES

Table 4-1. - Distance to objects on the horizon at sea	31
--	----

CODE TABLES

Code Table 5. - Symbol VV-Visibility.....	33
---	----

FIGURE

Figure 4. - Non-uniform visibility.....	32
---	----

CHAPTER IV. VISIBILITY

4000. GENERAL

4001. Visibility is a term that denotes the greatest distance from an observer that an object of known characteristics can be seen and identified. For purposes of weather reports, the term expresses the maximum visibility common to one-half or more of the horizon circle. This is called the prevailing visibility.

4100. DETERMINATION OF VISIBILITY

4101. Whenever possible, estimations of visibility will be based upon objects whose distance from the observer is known (i. e., the horizon or other ships). Estimations of the distance to a ship may be based on its apparent size and the portion visible. Visibility may also be estimated by determining the distance of a passing vessel by means of radar. Table 4-1 is a guide to determining the distance to the horizon and to objects such as a familiar type of ship whose height is known, e. g., the horizon, when viewed from a height of 40 feet above sea level, appears at a distance of 7.6 nautical miles.

4102. Estimations of visibility will be based on the sharpness with which the object stands out. Sharp outlines, with little or no blurring of color, indicate that the visibility is much greater than the distance to the object. On the other hand, blurred or indistinct objects indicate the presence of haze or other phenomena that has reduced the visibility to about the distance to the objects.

TABLE 4-1.—Distance to objects on the horizon at sea (nautical miles)

Height of observer's eyes above sea level (feet)	Height of object above sea level (feet)														
	0'	10	20	30	40	60	80	100	150	200	300	400	600	800	1,000
10.....	3.8	7.2	8.7	9.9	10.8	12.5	13.9	15.1	17.7	19.8	23.5	26.5	31.6	36.0	39.8
15.....	4.6	8.0	9.5	10.7	11.6	13.3	14.7	15.9	18.5	20.6	24.3	27.3	32.4	36.8	40.6
20.....	5.4	8.7	10.2	11.4	12.3	14.0	15.4	16.6	19.2	21.3	25.0	28.0	33.1	37.5	41.3
25.....	6.0	9.3	10.8	12.0	12.9	14.6	16.0	17.2	19.8	21.9	25.6	28.6	33.7	38.1	41.9
30.....	6.6	9.9	11.4	12.6	13.5	15.2	16.6	17.8	20.4	22.5	26.2	29.2	34.3	38.7	42.5
35.....	7.1	10.4	11.9	13.1	14.0	15.7	17.1	18.3	20.9	23.0	26.7	29.7	34.8	39.2	43.0
40.....	7.6	10.8	12.3	13.5	14.4	16.1	17.5	18.7	21.3	23.4	27.1	30.1	35.2	39.6	43.4
45.....	8.0	11.3	12.8	14.0	14.9	16.6	18.0	19.2	21.8	23.9	27.6	30.6	35.7	40.1	43.9
50.....	8.5	11.7	13.2	14.4	15.3	17.0	18.4	19.6	22.2	24.3	28.0	31.0	36.1	40.5	44.3
60.....	9.3	12.5	14.0	15.2	16.1	17.8	19.2	20.4	23.0	25.1	28.8	31.8	36.9	41.3	45.1
70.....	10.0	13.2	14.7	15.9	16.8	18.5	19.9	21.1	23.7	25.8	29.5	32.5	37.6	42.0	45.8
80.....	10.7	13.9	15.4	16.6	17.5	19.2	20.6	21.8	24.4	26.5	30.2	33.2	38.3	42.7	46.5
90.....	11.4	14.5	16.0	17.2	18.1	19.8	21.2	22.4	25.0	27.1	30.8	33.8	38.9	43.3	47.1
100.....	12.0	15.1	16.6	17.8	18.7	20.4	21.8	23.0	25.6	27.7	31.4	34.4	39.5	43.9	47.7

4103. When the visibility is not the same in all directions, the highest value common to one-half or more of the horizon circle should be coded in Form 615-5. For example, if fog limits the visibility in the north and east quadrants of the horizon circle to 1 mile, while the visibility in the other two quadrants is 6 miles, the maximum visibility common to one-half of the horizon circle is 6 miles, and code figure 97 would be used.

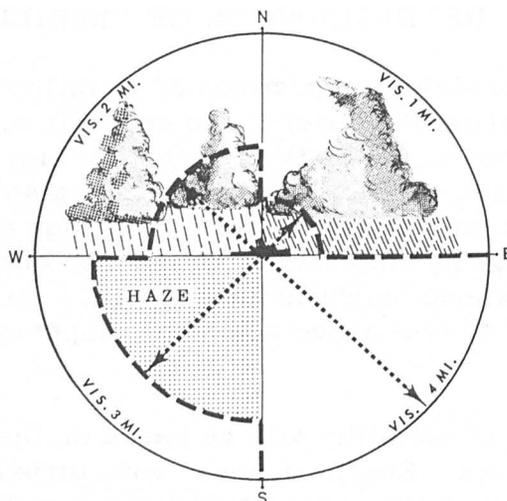


Figure 4. --Non-uniform visibility

4104. Figure 4 illustrates non-uniform visibility which may be the result of squalls in one quadrant of the horizon circle, light showers and haze in another and haze only in the third quadrant. Since the maximum visibility common to one-half of the circle is 3 miles, it would be reported as 2 miles (code figure 96).

4200. CODING AND ENTRY OF VISIBILITY DATA (VV) ON FORM 615-5

4201. Select the code figures from Code Table 5 corresponding to the visibility and enter the figures in column 10.

Code Table 5

SYMBOL VV.--Visibility

Code figures	Visibility range ¹
90	Less than 50 yards (50 meters).
91	50 yards (50 meters).
92	200 yards (200 meters).
93	1/4 nautical mile (500 meters).
94	1/2 nautical mile (1,000 meters).
95	1 nautical mile (2,000 meters).
96	2 nautical miles (4,000 meters).
97	5 nautical miles (10 kilometers).
98	10 nautical miles (20 kilometers).
99	25 nautical miles (50 kilometers) or more.

1. In case the observed visibility is between two of the distances in the table, the code figure for the lesser distance will be reported, e. g., when the visibility is between 50 and 200 yards, code the visibility as 91.

CHAPTER V. WEATHER

CONTENTS

	<u>Page</u>
General	37
Thunderstorms and lightning.....	37
General	37
Intensity of thunderstorm.....	37
Slight thunderstorm.....	37
Moderate thunderstorm.....	37
Heavy thunderstorm.....	37
Waterspouts and squalls.....	38
Precipitation.....	38
General	38
Character of precipitation.....	38
Continuous.....	38
Intermittent.....	38
Showery.....	38
Combinations.....	38
Intensity of precipitation.....	38
Types of precipitation.....	39
Liquid precipitation.....	39
Drizzle.....	39
Rain.....	39
Freezing precipitation.....	40
Freezing rain.....	40
Freezing drizzle.....	40
Frozen precipitation.....	40
Sleet (ice pellets).....	40
Hail.....	40
Small hail.....	40
Snow.....	40
Snow pellets (soft hail).....	40
Snow grains (granular snow).....	40
Ice crystals.....	41
Fog and rime.....	41
Fog.....	41
Shallow fog.....	41
Ice fog.....	41
Rime.....	41
Haze, smoke, and dust.....	41
Miscellaneous.....	42
Present weather (ww).....	42
General.....	42
Coding (ww).....	42
Entry of present weather data on Form 615-5.....	42

CONTENTS (Cont'd.)

	<u>Page</u>
Past weather (W).....	43
General	43
Coding and entry of past weather data (W) on Form 615-5	43

TABLES

Table 5-1.--Intensity of rain	39
Table 5-2.--Intensity of snow.....	39

CODE TABLES

Code Table 7--Symbol W.--Past weather	44
---	----

CHAPTER V. WEATHER

5000. GENERAL

5001. Weather elements of an observation comprise thunderstorms, lightning, waterspouts, squalls, and precipitation in any form. Fog, haze, smoke, and dust are classified as obstructions to vision. Rainbows, halos, coronas, and auroras are recorded as atmospheric phenomena.

5002. Clouds are not described here, since they are considered separately in Chapter VIII, and cloud code charts are illustrated in the back of WB Form 615-5.

5100. THUNDERSTORMS AND LIGHTNING

5110. **GENERAL.** A thunderstorm is regarded as occurring at the ship when thunder is heard. Lightning occurs as an electrical discharge within a cloud, from cloud to cloud, or from cloud to sea. Distant lightning is any lightning that occurs so far from the observer that the resulting thunder cannot be heard. It may be observed as streaks or sheets.

5120. **INTENSITY OF THUNDERSTORM.** Classification of a thunderstorm as slight, moderate, or heavy is based upon the appearance of the storm from the point of observation. The thunderstorm may be classified as slight throughout its history as viewed from this point, or it may be classified during its passage by the ship as slight, moderate, heavy; and, as it recedes, moderate and slight. Each classification is described below.

5121. Slight Thunderstorm. Lightning occurs within the cloud and rainfall is light or moderate. Small hail may also occur. Thunder is not loud, and lightning occurs at intervals of a minute or more. The surface wind speed, at the beginning of or during the storm, does not exceed 26 knots, and any sudden increase in speed is of short duration.

5122. Moderate Thunderstorm. Loud peals of thunder occur at brief intervals, and frequent flashes of lightning occur from cloud to surface, as well as from cloud to cloud; rain is moderate or heavy, and small hail is light or moderate. An onrush of wind may precede the storm, with a speed as high as 35 knots. Extensive masses of dark clouds showing visible indications of turbulence and rapid horizontal motion are usually observable.

5123. Heavy Thunderstorm. Sharp and pronounced thunder and lightning occur almost continuously. Heavy rain occurs, sometimes accompanied by hail. The wind preceding and accompanying the storm may reach a speed in excess of 35 knots. A rapid drop in temperature occurs, sometimes as much as 20°F. in 5 minutes.

5200. WATERSPOUTS AND SQUALLS

5201. Waterspouts occur when conditions are favorable for intense thunderstorm activity. The distinguishing feature is the funnel-shaped appendage that hangs from the base of the cloud. The storm is described as a tornado when it occurs over land.

5202. A squall is a strong wind that increases suddenly in speed, maintains a peak speed over a period of minutes, and decreases in speed; similar fluctuations will occur at succeeding intervals.

5300. PRECIPITATION

5310. **GENERAL.** Precipitation includes all forms of moisture that fall to the earth's surface--rain, drizzle, snow, hail, sleet, and ice crystals. Precipitation is classified as to its character, intensity, and type.

5320. **CHARACTER OF PRECIPITATION.** The classification of precipitation with respect to character is described below.

5321. Continuous. Precipitation usually associated with stratiform clouds. Any increase or decrease of intensity is gradual.

5322. Intermittent. Intensity increases or decreases gradually, and precipitation stops and recommences at least once within the hour preceding the time of observation.

5323. Showery. Precipitation associated with cumuliform clouds, especially swelling cumulus and cumulonimbus. Intensity varies rapidly. Showers begin and end abruptly.

5324. Combinations. When showers occur with continuous or intermittent precipitation, the precipitation does not always stop between showers. Under these conditions, precipitation is marked by a sudden increase and decrease in intensity as the showers abruptly begin and end.

5330. **INTENSITY OF PRECIPITATION.** The intensity of precipitation may be determined by its rate of fall and by the amount it reduces the visibility. The intensity is classified as light, moderate, or heavy. Tables 5-1 and 5-2 will be used as guides in determining the intensity of rain and snow respectively.

Table 5-1. --Intensity of rain

Slight	Individual drops are easily identifiable; spray over hard surfaces is slight; pools form very slowly; over 2 minutes may be required to wet decks and similar dry surfaces.
Moderate	Individual drops are not clearly identifiable; some spray over hard surfaces; pools form rapidly.
Heavy	Rain seemingly in sheets; individual drops are not identifiable; heavy spray to height of several inches is observable over hard surfaces; visibility is greatly reduced.

Table 5-2. --Intensity of snow

Slight	Visibility 1, 100 yards (1, 000 meters) or more.
Moderate	Visibility less than 1, 100 yards (1, 000 meters), but not less than 550 yards (500 meters).
Heavy	Visibility less than 550 yards (500 meters).

5340. **TYPES OF PRECIPITATION.** Precipitation comprises liquid, freezing, and frozen types. These types are described below.

5341. **Liquid Precipitation.** Liquid precipitation is classified as drizzle or rain as follows:

5341.1. **Drizzle.** Very small and uniformly dispersed droplets that appear to float in the air and to follow very light air currents. Drizzle usually falls from low stratus clouds and is frequently accompanied by low visibility and fog.

5341.2. **Rain.** Falling drops of liquid water that are larger than those in drizzle. Rain, as used in this manual, does not include drizzle and freezing rain.

5342. Freezing Precipitation. Freezing precipitation is classified as freezing rain or freezing drizzle, as follows:

5342.1. Freezing Rain. Rain that falls in liquid form and freezes to exposed surfaces. When the fall is so rapid that runoff occurs, the ice will usually appear as glaze.

5342.2. Freezing Drizzle. Drizzle that freezes similarly to rain.

5343. Frozen Precipitation. Solid precipitation is classified as follows:

5343.1. Sleet (Ice Pellets). Transparent, somewhat globular hard grains of ice, about the size of raindrops, that rebound when striking hard surfaces. Sleet may fall as continuous, intermittent, or showery precipitation.

5343.2. Hail. Ice balls or stones, ranging in diameter from that of medium-size raindrops to an inch or more. They may fall detached or frozen together into irregular, lumpy masses. They are composed either of clear or of alternating clear and opaque layers. Hail often accompanies thunderstorm activity. Surface temperatures are usually above freezing when hail occurs. The size is based on the diameter, in inches, of normally shaped hailstones.

5343.3. Small Hail. Semitransparent, round, or conical grains of frozen water. Each grain generally consists of a smaller grain of soft hail as a nucleus, surrounded by a very thin ice layer, which gives it a glazed appearance. The grains are wet when they fall at temperatures above freezing. They are not crisp or easily compressible, and do not generally rebound or burst when striking hard surfaces.

5343.4. Snow. White or translucent ice crystals chiefly in complex branched hexagonal form (six-pointed stars), often mixed with simple crystals. Snow occurs under conditions that are similar, temperature excepted, to those of corresponding forms of rain.

5343.5. Snow Pellets (Soft Hail). White, opaque, round, or occasionally conical kernels of snow-like consistency, 1/16 to 1/4-inch in diameter. They are crisp and easily compressible, and they may rebound or burst when striking hard surfaces. They occur almost exclusively in showers.

5343.6. Snow Grains (Granular Snow). The solid equivalent of drizzle. They take the form of minute, branched, star-like snowflakes, or of very fine, simple crystals. At times they have the appearance of rime. They occur under conditions similar to those of drizzle, except that the temperature is lower.

5343.7. **Ice Crystals.** Small, unbranched crystals in the form of rods or plates that have a descending motion and that may be observed when the sky is clear. Ice crystals are associated with halo phenomena and with temperatures near or below 0° F.

5400. FOG AND RIME

5410. **FOG.** Minute droplets suspended in the atmosphere. These droplets have no visible downward motion. Fog differs from clouds in that the base of fog is at the surface, while the base of clouds is above the surface. It is easily distinguished from haze by its dampness and grey color. It is unusual for fog to form when the difference between the air temperature and the temperature of the dew point is greater than 4.0° F.

5411. **Shallow Fog.** Low-lying fog that does not reduce horizontal visibility at a level 33 feet (10 meters) or more above the surface.

5412. **Ice Fog.** Suspended particles in the form of ice crystals. It occurs at low temperatures, and usually in clear, calm weather in high latitudes. The sun is usually visible and may cause halo phenomena.

5420. **RIME.** Rime is classified as soft or hard.

5420.1. Soft rime consists of white layers of ice crystals deposited chiefly on vertical surfaces--especially on points and edges of objects--generally in super-cooled fog. On the windward side of the rigging, soft rime may grow to very thick layers, long feathery cones, or needles pointing into the wind and having a structure similar to that of frost.

5420.2. Hard rime is an opaque, granular mass of ice deposited chiefly on vertical surfaces in wet fog at temperatures below 32° F. It is more compact and shapeless than soft rime, and may build out into the wind as glazed cones or feathers.

5500. HAZE, SMOKE, AND DUST

5501. Haze, smoke, and dust may be observed near land. Haze resembles a uniform veil with a bluish tinge when viewed against the sun or clouds at the horizon. When smoke is present the sun has a reddish tinge. Dust imparts a tannish or grayish hue to distant objects, and the sun appears pale with a yellowish tinge.

5600. MISCELLANEOUS

5601. In the column headed "Remarks" of Form 615-5, enter halos (solar or lunar), coronas (solar or lunar), rainbows, fog bows, and auroras.

5700. PRESENT WEATHER (ww)

5710. **GENERAL.** The term "present weather" refers to the state of the weather occurring at the time of the observation or within the 1-hour period prior to the observation. Code Table 6, "Present Weather" (in tables at the back of this manual) lists 100 weather situations, numbered from 00 to 99, which includes one or more of the weather elements discussed in the first portion of this chapter.

5720. **CODING.** Select the number from Code Table 6 (listed at the back of this manual, or from W.B. Form 615-5) that corresponds most nearly to the weather occurring at the time of the observation, or within 1 hour preceding the time of the observation. When precipitation is not occurring at the ship at the time of observation, the selection of "ww" should be made from code figures 00 to 49, and 98¹. When precipitation is is occurring at the time of the observation, the selection should be made from figures 50 to 99, inclusive.

5730. **ENTRY OF PRESENT WEATHER DATA ON FORM 615-5.** The code number selected as best representing the present weather (ww) should be entered in column 11 of Form 615-5. If more than one code number appears to be required, the highest should be entered in column 11, and all other appropriate numbers entered in the column headed "Remarks."

5731. Whenever fog is encountered, enter the character of the fog as "slight," "heavy," "shallow," or "ice fog," and the time (GCT) of beginning and ending in the column headed "Remarks" of W.B. Form 615-5.

5732. Enter the time (GCT) of beginning and ending of precipitation in the column headed "Remarks."

¹ When not accompanied by precipitation.

5800. PAST WEATHER (W)

5810. GENERAL. The term "past weather" refers to the state of the weather during the 6-hour interval prior to the time of the 00, 06, 12, and 18 GCT observations. However, when the ship is in the vicinity of a tropical storm, the Weather Bureau may request additional observations at 03, 09, 15, and 21 GCT (see §1021). For these extra observations, "past weather" refers to the state of the weather during the 3-hour interval prior to the time of the observation, and references in the following instructions to 6 hours will be understood, under these special circumstances, to refer to 3 hours.

5820. CODING AND ENTRY OF PAST WEATHER DATA (W) ON FORM 615-5. Select the code figure from Code Table 7 listed on page 44 of this manual, or from Table 7 on cover of Ship's Weather Observations, corresponding to the weather during the preceding 6 hours, and enter it in column 12. To a certain extent, the combined data coded as "W" and "ww" should give a complete description of the weather during the preceding 6 hours. When the weather occurring at the time of the observation (rather than the hour before it) is coded as "ww," the weather during the full 6 hours prior to the time of the observation must be coded as "W." When the weather that has occurred during the hour ending with the observation is coded as "ww," weather during the 5 hours preceding the hour covered by "ww" will be coded as "W." For example, if a rain shower has occurred during the hour preceding the 0600 GCT. observation, and the weather was generally cloudy during the entire 6-hour period prior to the observation, "ww" would be coded as 25, and "W" as 2. If showers were general throughout the 6-hour period, including the hour before the observation, "ww" would be coded as 25, and "W" as 8. When precipitation has occurred during the 6 hours preceding the time of the observation, but has not occurred during the hour preceding the observation, code figures 5, 6, 7, 8 or 9, as appropriate, will be used for "W."

5821. When thunder has been heard during the 6-hour period before the observation, but too early to be coded as "ww," "W" will always be coded as 9, regardless of other aspects of the weather. In general, when two or more code figures are appropriate for symbol "W," the highest figure will be used.

Code Table 7

SYMBOL W. --Past weather¹

(During 3 or 6 hours preceding the ACTUAL time of observation)

Code figure	Past weather
0	Cloud covering 1/2 or less of the sky throughout period.
1	Cloud covering more than 1/2 of sky during part of period, and less than 1/2 during part of period.
2	Cloud covering more than 1/2 of sky throughout period.
3	Sandstorm, duststorm, or drifting or blowing snow.
4	Fog, or thick haze.
5	Drizzle.
6	Rain.
7	Snow, rain and snow mixed, or ice pellets. ³
8 ²	Shower(s).
9 ²	Thunderstorm(s), with or without precipitation.

¹ - When precipitation or thunderstorms have occurred and have not been reported by ww, code figures 5 to 9 will be used as appropriate even though they do not represent the generally prevailing weather.

² - When code figure 8 or 9 is reported and the showers or thunderstorms were accompanied by hail add "past hail" to end of message.

³ - The term ice pellets is synonymous with the U. S. term "sleet."

CHAPTER VI. PRESSURE

CONTENTS

	<u>Page</u>
General	47
Installation of barometers	47
Barometer corrections	47
Aneroid barometers	47
General	47-48
Reading aneroid barometers	48
Barographs	49
General	49
Reading the barograph	49
Barograph charts--Form 455-12	51
Entries on the barograph chart	52
Installation of barograph chart	52
Static charge on Marine Barograph	53
Three-hour pressure tendency	54
General	54
Determination of tendency from the barograph	54
Determination of tendency from the barometer	54
Coding and entries of pressure data on Form 615-5	54
Barometric pressure (PPP)	54
Tendency (app)	56

CODE TABLES

Code Table 8. --Symbol PPP--Corrected barometric pressure	55
Code Table 15. --Symbol a--Barometer change characteristics in the last 3 hours	56
Code Table 16. --Symbol pp--Amount of barometric change in the last 3 hours	57

FIGURES

Figure 5. --Aneroid barometer	48
Figure 6. --Barograph, Marine Model G-220	50
Figure 7. --Barograph chart	51
Figure 8. --Barograph, Marine W. B. Model G-222	53

CHAPTER VI. PRESSURE

6000. GENERAL

6001. Atmospheric pressure is the pressure exerted by the weight of a column of air, of unit area, extending vertically from a given surface (sea level, for instance) to the top of the atmosphere. Atmospheric pressure may be measured with aneroid or mercurial barometers and aneroid barographs.

6010. INSTALLATION OF BAROMETERS. Barometers used in taking weather observations should be mounted in the chart room. The location should be as free as possible of vibrations and rapid changes in temperature. It should not be mounted close to sources of artificial heat, such as steam pipes and electric lights. The barometer scale should be placed at about eye level above the deck.

6020. BAROMETER CORRECTIONS. To insure comparability of pressure data, the Weather Bureau tests and assigns a number to each barometer in good condition. The correction applicable to the barometer is entered on a tag that is issued to the ship. The correction should be posted in a convenient place near the barometer and applied to each barometer reading. The correction should also be entered opposite the caption "correction" at the head of column 14 of each Form 615-5. A revised correction should be obtained at least once every 3 months. The correction is determined by comparing readings of the ship's barometer with pressure values obtained from a standard barometer. For this purpose, a precision aneroid may be carried aboard ship by a Weather Bureau representative, or the comparison may be made by telephone contact with one of the port offices listed in section 1400. When comparisons indicate that a barometer is defective, the Weather Bureau representative will recommend that it be replaced or repaired.

6021. When barometric comparisons cannot be made directly or by telephone, Form 455-1 "Request for Barometer Comparison" may be filled out in accordance with the instructions printed on it and mailed to the nearest Port Meteorological Office. Upon receipt of the form a Weather Bureau representative will visit the ship during the ship's inport period and compare all ship's barometers. A barometer correction tag will be attached to each barometer corrected.

6100. ANEROID BAROMETERS

6110. GENERAL. Pressure is indicated on an aneroid barometer by the position of a hand on a graduated dial. Aneroids have dials graduated at intervals equivalent to inches and hundredths, millibars and tenths, or

millimeters of mercury (see Fig. 5). To insure that a precision aneroid barometer will retain its calibration, it must be protected from violent jars.

6120. **READING ANEROID BAROMETERS.** To determine sea-level pressure from the aneroid barometer:

- (1) Tap the face of the instrument lightly with the finger or the eraser-end of a pencil to bring the hand to its true position.
- (2) Read to the nearest 0.01 inch, 0.1 millibar, or -.1 millimeter, estimating for values between the scale graduations.
- (3) Apply the correction established in accordance with ¶6020.

Example:

Barometer as read.....	Inches 29.88
Correction.....	-.07
Barometer corrected.....	29.81

6121. To avoid errors of parallax when the aneroid barometer is read, the line of sight should be perpendicular to the index hand on the instrument. If the aneroid has a mirror surface on the dial, parallax may be avoided by viewing it in a position such that the index hand and its image coincide.

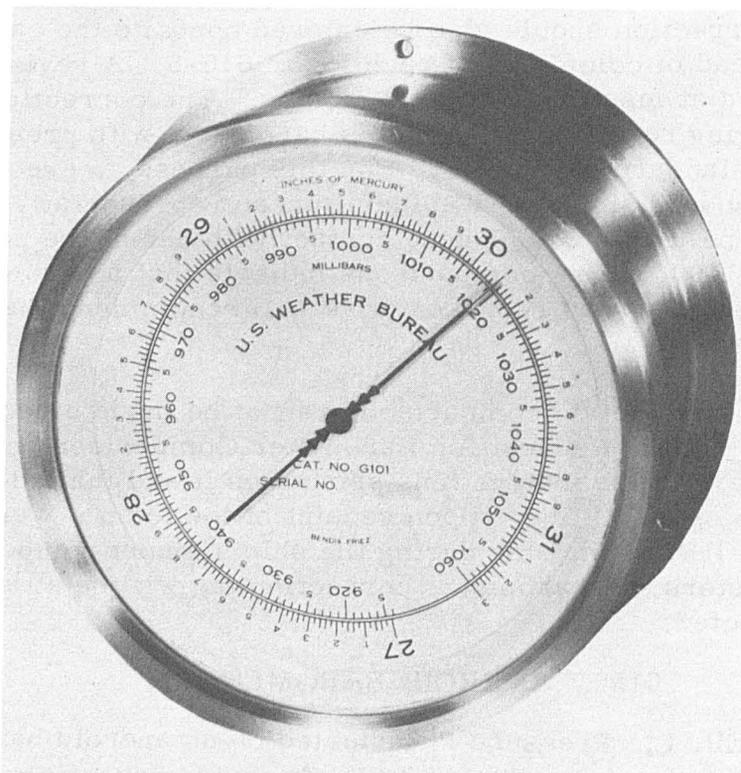


Figure 5. --Aneroid barometer, W. B. Model G-101.

6200. BAROGRAPHS

6210. GENERAL. The barograph is an open scale continuous recorder of atmospheric pressure. A pen moves across the chart 2.5 inches of distance for each inch of mercury (1 inch equals 33.864 millibars of pressure). The barograph consists of an aneroid pressure unit, suitable linkage and a clock driven drum upon which the chart is fastened. A knurled knot at the top of the bellows housing provides a means of setting the pen to the proper pressure (see Figures 6 and 7).

6211. Barographs furnished or tested by the Weather Bureau are adjusted to read sea-level pressure when installed aboard ship. The barograph should be adjusted to a zero correction each time a correction is obtained for the ship's aneroid or mercurial barometer.

6212. For purposes of the weather observation, the atmospheric pressure, as entered on Form 615-5 will not be obtained from the barograph, but will be read from the barometer; however, the 3-hour pressure tendency (see sec. 6300) will be read from the barograph trace.

6220. READING THE BAROGRAPH. The distance between horizontal pressure lines on the chart is equivalent to 1.0 millibar of pressure. For convenience of reading, each five millibar line is identified by bold type numerals. Barometric pressure will be read to the nearest 0.1 millibar of pressure. Three-hour pressure tendencies should be determined in accordance with the instructions contained in section 6300.

6221. When the pressure changes an amount sufficient to cause the pen arm to reach the top or bottom of the chart, turn the thumbnut on top of the aneroid cell enough to move the pen approximately 30 millibars toward the center of the chart. Renumber the pressure line accordingly. When the pressure returns to normal, move the pen approximately 30 millibars in the opposite direction. Adjust the pen, making sure that it checks with the corrected sea-level pressure reading of the ship's aneroid barometer.

6230. BAROGRAPH CHARTS - FORM W.B. 455-12. The Weather Bureau will supply barograph charts upon request. All requests for charts should include the Weather Bureau form number. If charts do not have a Weather Bureau form number, the Weather Bureau should be consulted before the forms are ordered. Requests for forms should be made in accordance with ¶ 1301.

6230.1. The barograph chart should always be changed immediately following the 0000 G. M. T. observation of the first of each month, and each time the clip bar on the drum approaches within 3 to 6 hours of the pen.

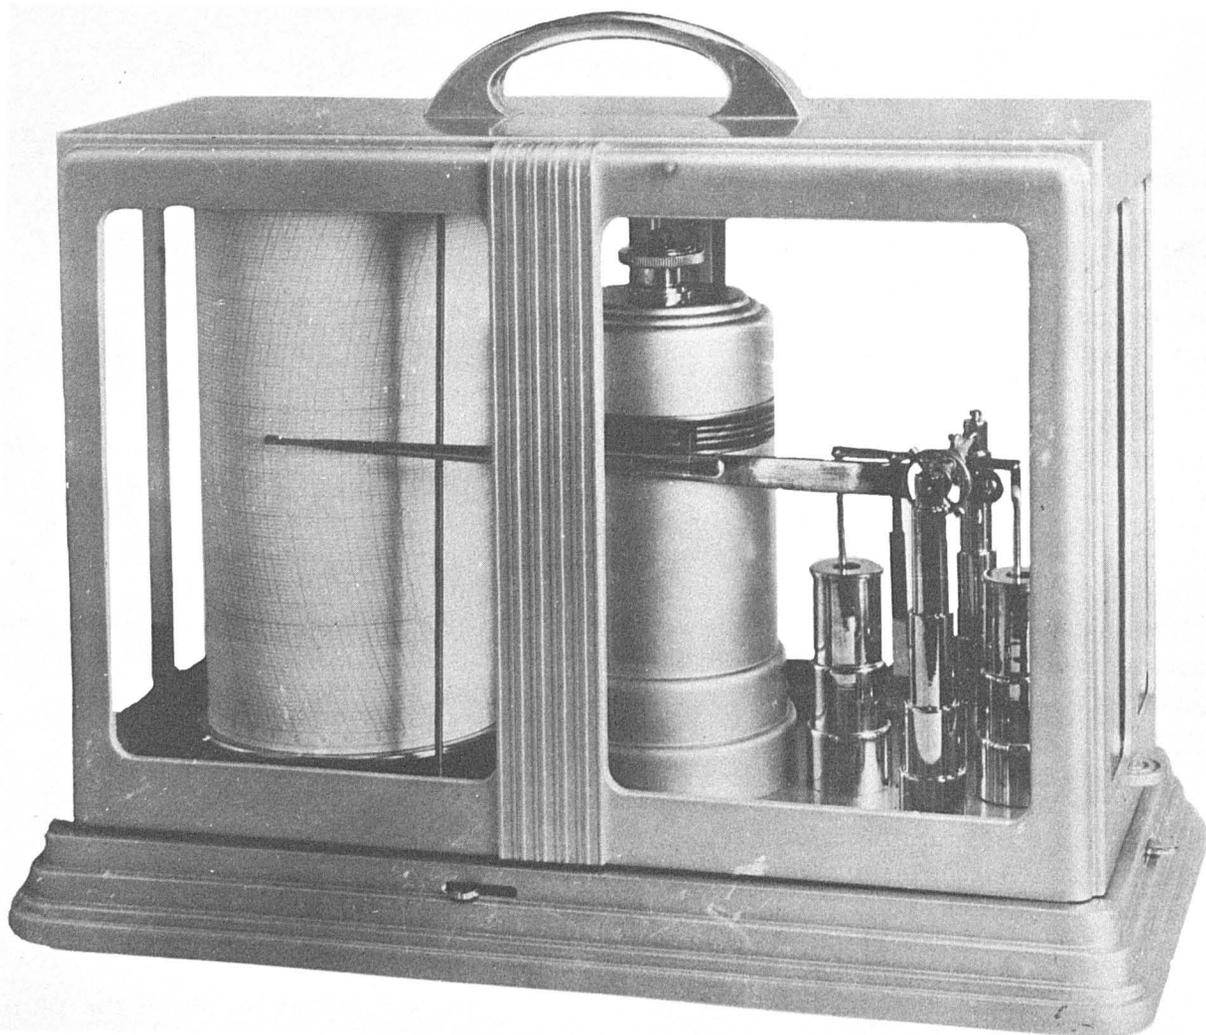


Figure 6. --Barograph, W. B. Marine Model G-220.

6231. Entries on the Barograph Chart (see Fig. 7). Before placing a chart on the barograph, use a typewriter or pen and ink to enter the following data: (1) In the space provided, enter the ship's name, destination and the date and time the chart is placed on the drum and the pen set.

PRESSURE

FORM 489-12

PEN ARM IS 7.833 INCHES LONG. AXIS IS 3.375 INCHES ABOVE CLOCK FLANGE.

OCTOBER 1957

U. S. DEPARTMENT OF COMMERCE, WEATHER BUREAU

BAROGRAM

SHIP: USCGC BLACKTHORN ROUTE FROM: Mobilo, Ala. TO: Campeche Area

CHART ON DATE: 8/10/57 TIME: 1201 CHART OFF DATE: 8/10/57 TIME: 1200 ALL TIMES GREENWICH MERIDIAN.
LOG SHIP'S POSITION AT 1200GMT FOR EACH DAY AFTER REMOVING CHART.

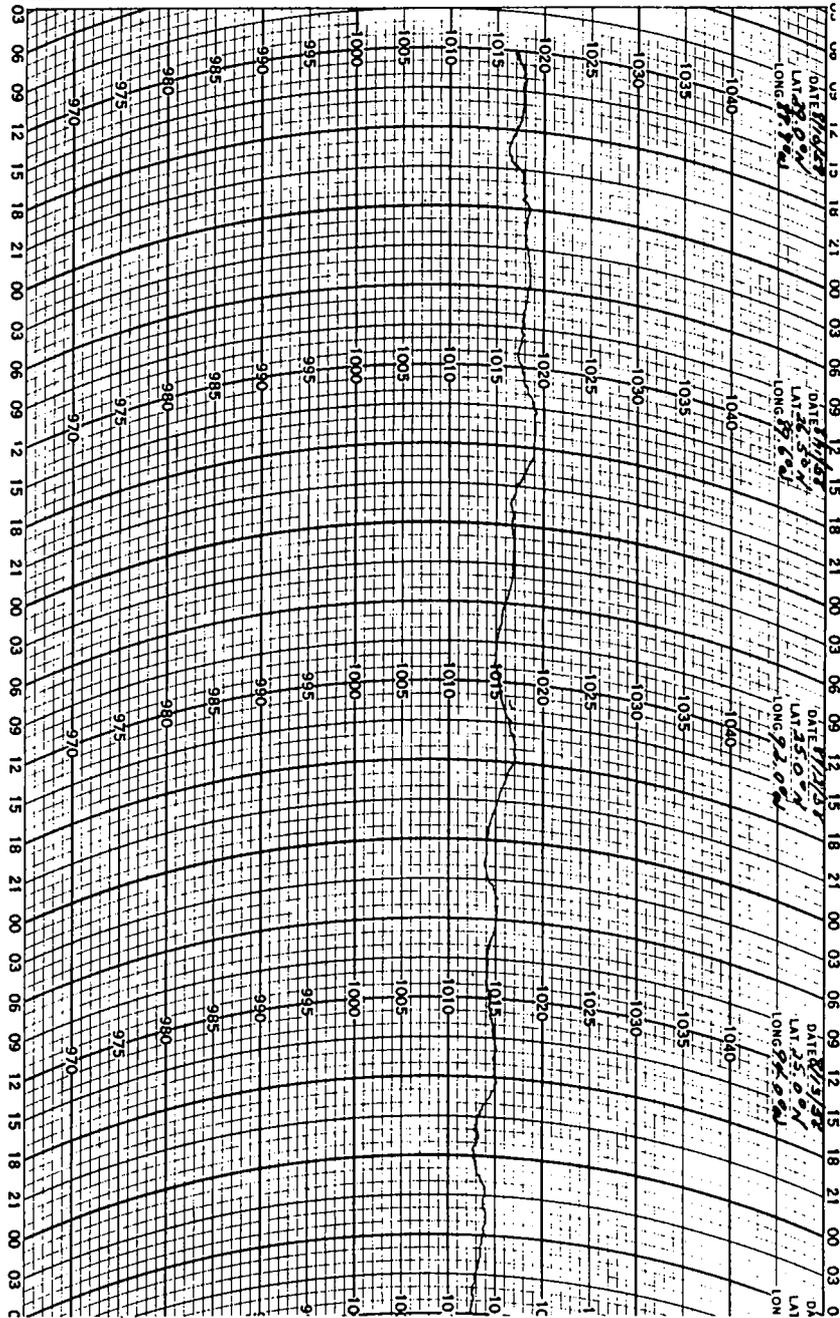


Figure 7. --Barograph chart with entries made in accordance with §6231. The 3-hour pressure tendencies for the period are entered on Form 615-5.

6232. INSTALLATION OF BAROGRAPH CHART. On most types of barographs the form is removed and the new one put on in the following manner:

- (1) Remove the case cover. Barograph Model G-220 is unlatched at the base and the cover swung to the left allowing the case cover to rest on the same plane as the base. Barograph Model G-222 is provided with an airtight case. To remove the cover rotate the catch wings clockwise and swing the catches away from the case. Lift the case cover STRAIGHT UP carefully so that its flange will not catch the pen.
- (2) Raise the pen from the form with the lever provided for that purpose and open the case and remove the cylinder from the barograph. Loosen the clip holding the form and remove the used sheet (use care to avoid smearing the wet ink). Wind the clock. If any adjustments are necessary for gain or loss of time, barograph Model G-220 is provided with a small inspection hole in the top of the cylinder for this purpose. Clock adjustments to barographs Model G-222, when necessary, will be made by the Weather Bureau personnel.
- (3) Wrap the new chart around the barograph cylinder so that it fits the cylinder tightly, and that its bottom edge is in contact with the flange at the bottom. When the chart is correctly placed, the ends of the horizontal coordinate lines will match.
- (4) Place the clip bar over the end of the chart and smooth out the bulges. While holding the chart snugly in place, slide the metal retainer into the slot in the chart drum flange and into the recess in its upper rim.
- (5) Fill the pen with No. 10 barograph ink. This is a slow drying ink which does not require a large pen reservoir. Take care to avoid getting ink on the exterior surfaces of the pen or spilling ink on parts of the instrument.
- (6) Place the cylinder on the barograph and turn it clockwise until the pen has nearly reached the time line on the chart. Lower the pen on the chart. The clock is then set to time by turning the chart drum clockwise until the recording pen is brought to the proper time line on the chart.
- (7) Replace the case cover. In the case of Barograph Model G-222 care should be taken not to touch the pen with the case flange. The case should be lowered STRAIGHT DOWN.

6232. 1. Chart entry - On each chart removed from the barograph:

- (1) Enter the date and pen-up time in the spaces provided for "Chart-off and date and time."
- (2) Enter across the top of the chart the date and position of each day's record in appropriate spaces on the 1200 (Noon) line.
- (3) All time entries should be in Greenwich Meridian Time.

- (4) When the pen has been reset (see ¶6221) to compensate for a large pressure change, indicate and check the points of change to be certain that the pen was returned to its normal position following return to normal pressure.

6233. Marine barograph, Weather Bureau Model G-222 is similar in principal to Weather Bureau Model G-220, however, it differs somewhat in construction. Model G-222, due to its improved inherent balance is more adaptable for shipboard use. It is provided with an airtight case. Two vents are supplied in the base, one a plug and the other a hose connection. These vents provide a convenient means of connecting the barograph to a static head exposed to outside air pressure when necessary.

6233.1. Static Charge on Marine Barograph: The window of the Model G-222 marine barograph is made of plastic and when cleaned with a dry cloth develops a static charge. If the air is dry the static charge does not dissipate and may become strong enough to pull the pen off the chart. Damage may result if the covering case is removed when the pen arm is held against the window by the static charge. Wiping the barograph case with a damp cloth will provide sufficient conductivity to bleed off the static charge, however, a more lasting effect can be gained by rubbing a few drops of liquid detergent, or a small amount of powdered graphite on the window.

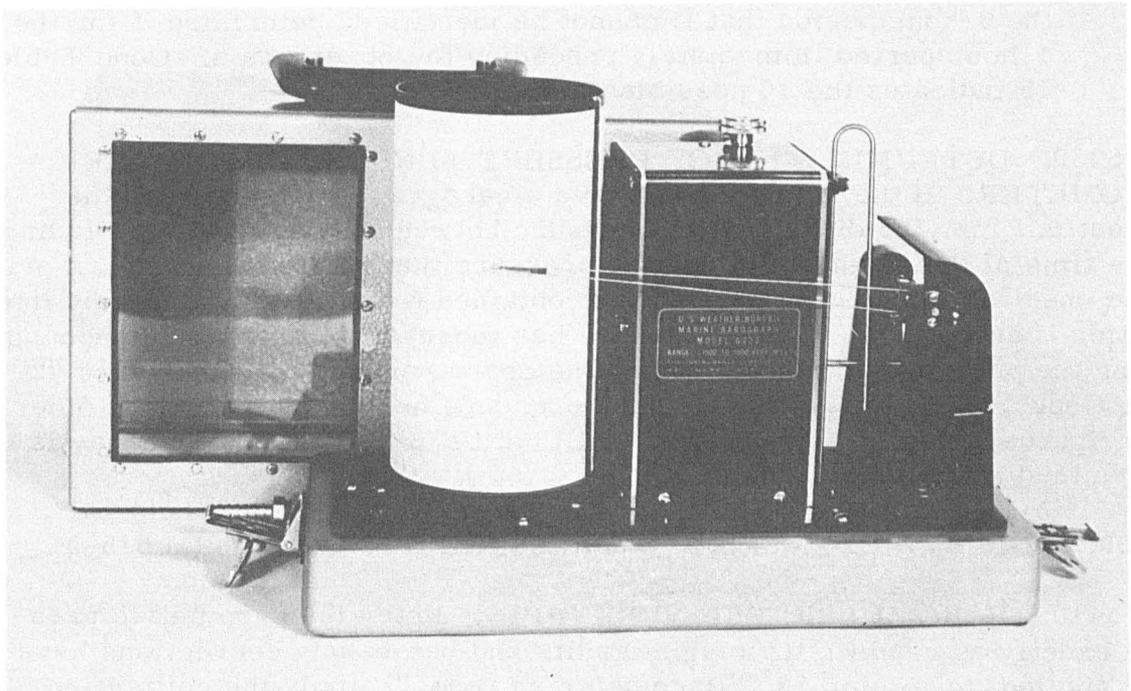


Figure 8. --Barograph, Marine, W. B. Model G-222

6300. THREE-HOUR PRESSURE TENDENCY

6310. GENERAL. The pressure tendency is composed of three elements: (1) The net change in barometric pressure within the 3-hour period before an observation, (2) indication as to whether the barometric pressure is higher or lower at the end of the period than at the beginning of the period, and (3) the characteristic of the change during the period.

6320. DETERMINATION OF TENDENCY FROM THE BAROGRAPH.

The pressure tendency may be determined from the barograph as described below:

- (1) Find the net amount of pressure change over the 3-hour period in the following manner:
 - a. Determine to the nearest 0.1 mb., the difference in pressure between the beginning and the end of the period. No barometer correction (see ¶6020) is to be applied to the value of the trace at these points.
 - b. Observe whether the pressure is the same as, higher, or lower than it was at the beginning of the period.
- (2) Determine the characteristic of the trace by observing whether the trace shows a falling or rising, steady or unsteady character, or a combination of these. If the characteristic is so variable over the 3-hour period that it cannot be identified, determine it for the 1-hour period immediately preceding the observation. Code Table 15 indicates the 10 possible characteristics.

6330. DETERMINATION OF PRESSURE TENDENCY FROM THE BAROMETER. If the ship does not have a barograph, determine to the nearest 0.1 mb. the difference in pressure between the barometric reading at the time of the observation and the pressure that existed three hours prior to the observation. These data may be obtained from the ship's log (by interpolation if necessary). If the pressure has increased or remained unchanged during the preceding 3 hours, record the characteristic as code figure "2" from Code Table 15, and as "7" if the pressure has decreased. The other code figures listed in Code Table 15 will not be used when the tendency is determined from the barometer.

6400. CODING AND ENTRIES OF PRESSURE DATA ON FORM 615-5

6410. BAROMETRIC PRESSURE (PPP). Enter the barometric pressure exactly as read (in the original units and before any corrections have been applied) in column 13, "Barometer as read." Apply the correction entered at the top of column 14 and enter the corrected reading in column 14, "Barometer corrected."

6411. The pressure is entered in column 16, "Barometer corrected (mb.)," in "tens," "units," and "tenths" of millibars, and the initial "9" or "10" in column 15. If the barometer reading is in inches, use Code Table 8 to convert the value to millibars. If the reading is in millimeters, use Table 26 (in the back of this manual). Example: A pressure of 981.7 millibars is entered in column 16 (PPP) as 817, and in column 15 as 9.

CODE TABLE 8

SYMBOL PPP.—Corrected barometer reading

Code in "tens," "units," and tenths of millibars, omit initial 9 or 10

1 inch = 33.86395 mb. 1 mb. = 0.02952993 inch

In.	Milli-bars												
27.50	931.3	28.00	948.2	28.50	965.1	29.00	982.1	29.50	999.0	30.00	1,015.9	30.50	1,032.9
27.51	931.6	28.01	948.5	28.51	965.5	29.01	982.4	29.51	999.3	30.01	1,016.3	30.51	1,033.2
27.52	931.9	28.02	948.9	28.52	965.8	29.02	982.7	29.52	999.7	30.02	1,016.6	30.52	1,033.5
27.53	932.3	28.03	949.2	28.53	966.1	29.03	983.1	29.53	1,000.0	30.03	1,016.9	30.53	1,033.9
27.54	932.6	28.04	949.5	28.54	966.5	29.04	983.4	29.54	1,000.3	30.04	1,017.3	30.54	1,034.2
27.55	933.0	28.05	949.9	28.55	966.8	29.05	983.7	29.55	1,000.7	30.05	1,017.6	30.55	1,034.5
27.56	933.3	28.06	950.2	28.56	967.2	29.06	984.1	29.56	1,001.0	30.06	1,018.0	30.56	1,034.9
27.57	933.6	28.07	950.6	28.57	967.5	29.07	984.4	29.57	1,001.4	30.07	1,018.3	30.57	1,035.2
27.58	934.0	28.08	950.9	28.58	967.8	29.08	984.8	29.58	1,001.7	30.08	1,018.6	30.58	1,035.6
27.59	934.3	28.09	951.2	28.59	968.2	29.09	985.1	29.59	1,002.0	30.09	1,019.0	30.59	1,035.9
27.60	934.6	28.10	951.6	28.60	968.5	29.10	985.4	29.60	1,002.4	30.10	1,019.3	30.60	1,036.2
27.61	935.0	28.11	951.9	28.61	968.8	29.11	985.8	29.61	1,002.7	30.11	1,019.6	30.61	1,036.6
27.62	935.3	28.12	952.3	28.62	969.2	29.12	986.1	29.62	1,003.1	30.12	1,020.0	30.62	1,036.9
27.63	935.7	28.13	952.6	28.63	969.5	29.13	986.5	29.63	1,003.4	30.13	1,020.3	30.63	1,037.3
27.64	936.0	28.14	952.9	28.64	969.9	29.14	986.8	29.64	1,003.7	30.14	1,020.7	30.64	1,037.6
27.65	936.3	28.15	953.3	28.65	970.2	29.15	987.1	29.65	1,004.1	30.15	1,021.0	30.65	1,037.9
27.66	936.7	28.16	953.6	28.66	970.5	29.16	987.5	29.66	1,004.4	30.16	1,021.3	30.66	1,038.3
27.67	937.0	28.17	953.9	28.67	970.9	29.17	987.8	29.67	1,004.7	30.17	1,021.7	30.67	1,038.6
27.68	937.4	28.18	954.3	28.68	971.2	29.18	988.2	29.68	1,005.1	30.18	1,022.0	30.68	1,038.9
27.69	937.7	28.19	954.6	28.69	971.6	29.19	988.5	29.69	1,005.4	30.19	1,022.4	30.69	1,039.3
27.70	938.0	28.20	955.0	28.70	971.9	29.20	988.8	29.70	1,005.8	30.20	1,022.7	30.70	1,039.6
27.71	938.4	28.21	955.3	28.71	972.2	29.21	989.2	29.71	1,006.1	30.21	1,023.0	30.71	1,040.0
27.72	938.7	28.22	955.6	28.72	972.6	29.22	989.5	29.72	1,006.4	30.22	1,023.4	30.72	1,040.3
27.73	939.0	28.23	956.0	28.73	972.9	29.23	989.8	29.73	1,006.8	30.23	1,023.7	30.73	1,040.6
27.74	939.4	28.24	956.3	28.74	973.2	29.24	990.2	29.74	1,007.1	30.24	1,024.0	30.74	1,041.0
27.75	939.7	28.25	956.7	28.75	973.6	29.25	990.5	29.75	1,007.5	30.25	1,024.4	30.75	1,041.3
27.76	940.1	28.26	957.0	28.76	973.9	29.26	990.9	29.76	1,007.8	30.26	1,024.7	30.76	1,041.7
27.77	940.4	28.27	957.3	28.77	974.3	29.27	991.2	29.77	1,008.1	30.27	1,025.1	30.77	1,042.0
27.78	940.7	28.28	957.7	28.78	974.6	29.28	991.5	29.78	1,008.5	30.28	1,025.4	30.78	1,042.3
27.79	941.1	28.29	958.0	28.79	974.9	29.29	991.9	29.79	1,008.8	30.29	1,025.7	30.79	1,042.7
27.80	941.4	28.30	958.3	28.80	975.3	29.30	992.2	29.80	1,009.1	30.30	1,026.1	30.80	1,043.0
27.81	941.8	28.31	958.7	28.81	975.6	29.31	992.6	29.81	1,009.5	30.31	1,026.4	30.81	1,043.3
27.82	942.1	28.32	959.0	28.82	976.0	29.32	992.9	29.82	1,009.8	30.32	1,026.8	30.82	1,043.7
27.83	942.4	28.33	959.4	28.83	976.3	29.33	993.2	29.83	1,010.2	30.33	1,027.1	30.83	1,044.0
27.84	942.8	28.34	959.7	28.84	976.6	29.34	993.6	29.84	1,010.5	30.34	1,027.4	30.84	1,044.4
27.85	943.1	28.35	960.0	28.85	977.0	29.35	993.9	29.85	1,010.8	30.35	1,027.8	30.85	1,044.7
27.86	943.4	28.36	960.4	28.86	977.3	29.36	994.2	29.86	1,011.2	30.36	1,028.1	30.86	1,045.0
27.87	943.8	28.37	960.7	28.87	977.7	29.37	994.6	29.87	1,011.5	30.37	1,028.4	30.87	1,045.4
27.88	944.1	28.38	961.1	28.88	978.0	29.38	994.9	29.88	1,011.9	30.38	1,028.8	30.88	1,045.7
27.89	944.5	28.39	961.4	28.89	978.3	29.39	995.3	29.89	1,012.2	30.39	1,029.1	30.89	1,046.1
27.90	944.8	28.40	961.7	28.90	978.7	29.40	995.6	29.90	1,012.5	30.40	1,029.5	30.90	1,046.4
27.91	945.1	28.41	962.1	28.91	979.0	29.41	995.9	29.91	1,012.9	30.41	1,029.8	30.91	1,046.7
27.92	945.5	28.42	962.4	28.92	979.3	29.42	996.3	29.92	1,013.2	30.42	1,030.1	30.92	1,047.1
27.93	945.8	28.43	962.8	28.93	979.7	29.43	996.6	29.93	1,013.5	30.43	1,030.5	30.93	1,047.4
27.94	946.2	28.44	963.1	28.94	980.0	29.44	997.0	29.94	1,013.9	30.44	1,030.8	30.94	1,047.8
27.95	946.5	28.45	963.4	28.95	980.4	29.45	997.3	29.95	1,014.2	30.45	1,031.2	30.95	1,048.1
27.96	946.8	28.46	963.8	28.96	980.7	29.46	997.6	29.96	1,014.6	30.46	1,031.5	30.96	1,048.4
27.97	947.2	28.47	964.1	28.97	981.0	29.47	998.0	29.97	1,014.9	30.47	1,031.8	30.97	1,048.8
27.98	947.5	28.48	964.4	28.98	981.4	29.48	998.3	29.98	1,015.2	30.48	1,032.2	30.98	1,049.1
27.99	947.9	28.49	964.8	28.99	981.7	29.49	998.6	29.99	1,015.6	30.49	1,032.5	30.99	1,049.5

6420. TENDENCY (app). Select the appropriate code figure for the pressure characteristic (a) from Code Table 15 and enter it in column 25 of Form 615-5 (when (PP) is "0" (a) must be "0", "4", or "5").

CODE TABLE 15

SYMBOL a.—Barometer change characteristics in the last 3 hours

Trace	Code figures	Description
	0	Rising, then falling. Barometer the same or higher than 3 hours ago.
	1	Rising, then steady; or rising then rising more slowly.
	2	Rising, steadily or unsteadily.
	3	Falling or steady, then rising; or rising then rising more quickly.
	4	Steady. Barometer the same as 3 hours ago.
	5	Falling, then rising. Barometer the same or lower than 3 hours ago.
	6	Falling, then steady; or falling then falling more slowly.
	7	Falling, steadily or unsteadily.
	8	Steady or rising, then falling; or falling, then falling more quickly.

6421. Determine the amount of pressure change (pp) in accordance with §6320 (1), and use Code Table 16 to convert the value to millibars and tenths. Enter the amount, without the decimal point, in column 26. Example: A pressure change of 3.9 millibars would be entered in column 26 as 39.

6422. When the amount of the barometric pressure change equals or exceeds 9.9 millibars, the group "99ppp" should be inserted in the message following the "D_Sv_Sapp" group. The "99" is the group identifier, and "ppp" is the total amount of the pressure change (in tens, units, and tenths of millibars) during the preceding 3 hours. When the group is inserted, "99" should be reported for "pp" in the "D_Sv_Sapp" group. For example: If the total amount of the pressure change is 13.4 millibars, the groups should be coded "D_Sv_Sa99 99134." If the amount is 9.9 millibars, the groups are coded "D_Sv_Sa99 99099." ("D_Sv_Sa" should be given appropriate values.)

PRESSURE

CODE TABLE 16

SYMBOL pp.—Amount of barometric change in the last 3 hours

[Coded in units of 1/10 of a millibar. For example, 0.025 inch is coded as 09; 1.2 millibars as 12]

Amount of rise or fall							
Inch	Milli-bars	Inch	Milli-bars	Inch	Milli-bars	Inch	Milli-bars
0. 005	0. 2	0. 155	5. 2	0. 305	10. 3	0. 455	15. 4
. 010	0. 3	. 160	5. 4	. 310	10. 5	. 460	15. 6
. 015	0. 5	. 165	5. 6	. 315	10. 7	. 465	15. 7
. 020	0. 7	. 170	5. 8	. 320	10. 8	. 470	15. 9
. 025	0. 8	. 175	5. 9	. 325	11. 0	. 475	16. 1
. 030	1. 0	. 180	6. 1	. 330	11. 2	. 480	16. 3
. 035	1. 2	. 185	6. 3	. 335	11. 3	. 485	16. 4
. 040	1. 4	. 190	6. 4	. 340	11. 5	. 490	16. 6
. 045	1. 5	. 195	6. 6	. 345	11. 7	. 495	16. 8
. 050	1. 7	. 200	6. 8	. 350	11. 9	. 500	16. 9
. 055	1. 9	. 205	6. 9	. 355	12. 0	. 505	17. 1
. 060	2. 0	. 210	7. 1	. 360	12. 2	. 510	17. 3
. 065	2. 2	. 215	7. 3	. 365	12. 4	. 515	17. 4
. 070	2. 4	. 220	7. 5	. 370	12. 5	. 520	17. 6
. 075	2. 5	. 225	7. 6	. 375	12. 7	. 525	17. 8
. 080	2. 7	. 230	7. 8	. 380	12. 9	. 530	17. 9
. 085	2. 9	. 235	8. 0	. 385	13. 0	. 535	18. 1
. 090	3. 0	. 240	8. 1	. 390	13. 2	. 540	18. 3
. 095	3. 2	. 245	8. 3	. 395	13. 4	. 545	18. 5
. 100	3. 4	. 250	8. 5	. 400	13. 5	. 550	18. 6
. 105	3. 6	. 255	8. 6	. 405	13. 7	. 555	18. 8
. 110	3. 7	. 260	8. 8	. 410	13. 9	. 560	19. 0
. 115	3. 9	. 265	9. 0	. 415	14. 1	. 565	19. 1
. 120	4. 1	. 270	9. 1	. 420	14. 2	. 570	19. 3
. 125	4. 2	. 275	9. 3	. 425	14. 4	. 575	19. 5
. 130	4. 4	. 280	9. 5	. 430	14. 6	. 580	19. 6
. 135	4. 6	. 285	9. 7	. 435	14. 7	. 585	19. 8
. 140	4. 7	. 290	9. 8	. 440	14. 9	. 590	20. 0
. 145	4. 9	. 295	10. 0	. 445	15. 1	. 595	20. 1
. 150	5. 1	. 300	10. 2	. 450	15. 2	. 600	20. 3

CHAPTER VII. TEMPERATURE

CONTENTS

	<u>Page</u>
General	61
Air-temperature measurements.....	61
Definitions	61
Reading the thermometer.....	61
Psychrometers.....	61
Psychrometer (portable, aspirated, electric).....	62
Care of the psychrometer	62
Sling psychrometer	62-63
Psychrometer readings.....	64
Computation of the dew-point temperature.....	64
Depression of the wet-bulb thermometer	64-65
Wet bulb above 20° F.....	65
Wet bulb 20° F. and lower	65
Psychrometric tables	65
Sea-water temperature readings	65
General	65
Coding and entries of temperature data on Form 615-5	66
Air temperatures (TT, T _d T _d)	66
Sea-water temperature.....	66
Sea-air temperature difference (T _s T _s)	66

FIGURES

Figure 9 Sling psychrometer.....	62
Figure 10 Psychrometer (portable, aspirated, electric).....	63

CHAPTER VII. TEMPERATURE

7000. GENERAL

7001. Temperature readings are made at sea to determine the free-air temperature, the dew-point temperature, and the temperature of the sea surface.

7100. AIR-TEMPERATURE MEASUREMENTS

7110. **DEFINITIONS.** The following terms are used in connection with air-temperature measurements:

- (1) Free-air temperature. --The temperature (or dry bulb) measured by an ordinary thermometer exposed to the free air on the windward side of the ship under conditions that eliminate as completely as possible the effects of extraneous sources of heat.
- (2) Wet-bulb temperature. --The lowest temperature to be secured by evaporating water from a muslin-covered bulb of a thermometer at a specified rate of ventilation. The wet-bulb temperature differs from the dry-bulb temperature in an amount dependent on the temperature and relative humidity of the air.
- (3) The dew point. --The temperature at which condensation would occur if the air were cooled. The dew point can be computed when the difference between the dry-bulb and the wet-bulb temperature is known.

7120. READING THE THERMOMETER. Temperatures indicated by any mercurial or spirit-filled thermometer may be determined as follows:

- (1) Stand as far from the thermometer as is consistent with accurate reading, to prevent body heat from affecting the instrument.
- (2) Insure that the line of sight from the eye to the top of the liquid column makes an angle of 90° with the thermometer tube. This will avoid an error of parallax.
- (3) Read the thermometer to nearest 0.1° . A degree interval begins at the middle of the degree marking etched on the tube.

7130. **PSYCHROMETERS.** Air-temperature measurements may be made with a psychrometer. Psychrometers consist of one dry and one wet-bulb thermometer mounted on a single frame. The psychrometer should be so ventilated that the minimum speed of air passing over the thermometer bulbs is at least 15 feet per second (9 knots). Psychrometer tables are based upon this rate of ventilation, which must be maintained to obtain accurate measurements.

7131. **PSYCHROMETER** (portable, aspirated, electric). The aspirated psychrometer was designed primarily for shipboard use. The instrument consists of a pair of matched wet and dry bulb thermometers, a ventilating fan which is powered by three standard size "D" flashlight batteries. The illumination and the "on-off" switching system is operated by a knob on the side of the psychrometer case. Thermometers are shielded from external heat radiation by means of a removable plastic air intake shield. (See Fig. 10.)

7131.1. Care should be exercised when replacing the air intake thermometer shield. Slide the shield in place with the wide open nozzles pointing outward from the instrument. Ventilation will be limited if replaced in a reverse position.

7132. Care of the Psychrometer. The bulb of the wet-bulb thermometer is covered with muslin, which must be saturated with water before the psychrometer is ventilated and a reading of the wet-bulb temperature is made. Use only clean, fresh water, preferably distilled water or cooled water from the condenser, to moisten the muslin. Change the muslin whenever it becomes soiled or encrusted with lime or salt.

7133. Sling Psychrometer. The sling psychrometer is readily adaptable to shipboard use since it is easily carried to the most suitable exposure. The dry and wet-bulb thermometers are mounted on a single frame that is attached to a handle in such a way that the thermometers can be whirled in a circle (see Fig. 9). Errors in reading arising from exposure to rain or direct sunlight are overcome, to a large extent, by the strong ventilation to which the thermometers are subjected. When not in use, the psychrometer should be stored at outdoor temperature in a safe, sheltered place (e. g., in a padded box secured to the bulkhead).

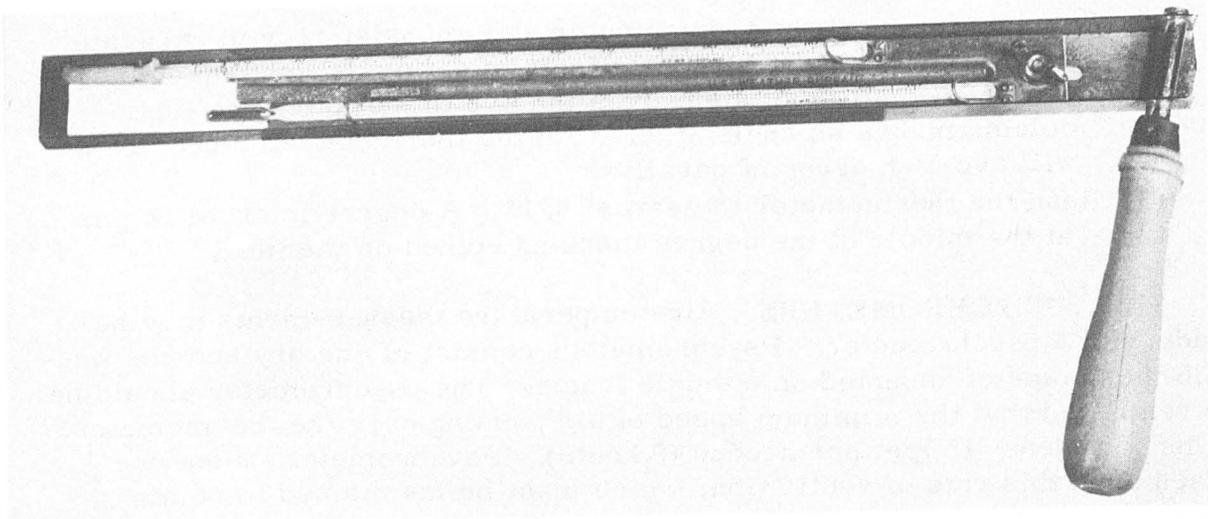


Figure 9. --Sling psychrometer.

7133.1. Psychrometers should be used in accordance with the following instructions:

- (1) The wet bulb wicking should be thoroughly moistened, taking precaution to prevent the moisture from contacting the dry bulb.
- (2) Select a shady spot on the windward side of the bridge which is free from spray and has no obstructions within a radius of the whirling sling.
- (3) Face into the wind.
- (4) Whirl the psychrometer as far in front of the body as conveniently possible.
- (5) When the apparent wind is greater than nine knots, do not whirl the psychrometer. The psychrometer may be properly ventilated by holding the instrument in the direct wind stream and pointing the bulbs in to the wind.
- (6) Read the wet and dry thermometers while holding the instrument as far from the body as practicable.
- (7) Repeat steps 5 and 6 above until a minimum wet bulb temperature has been reached.

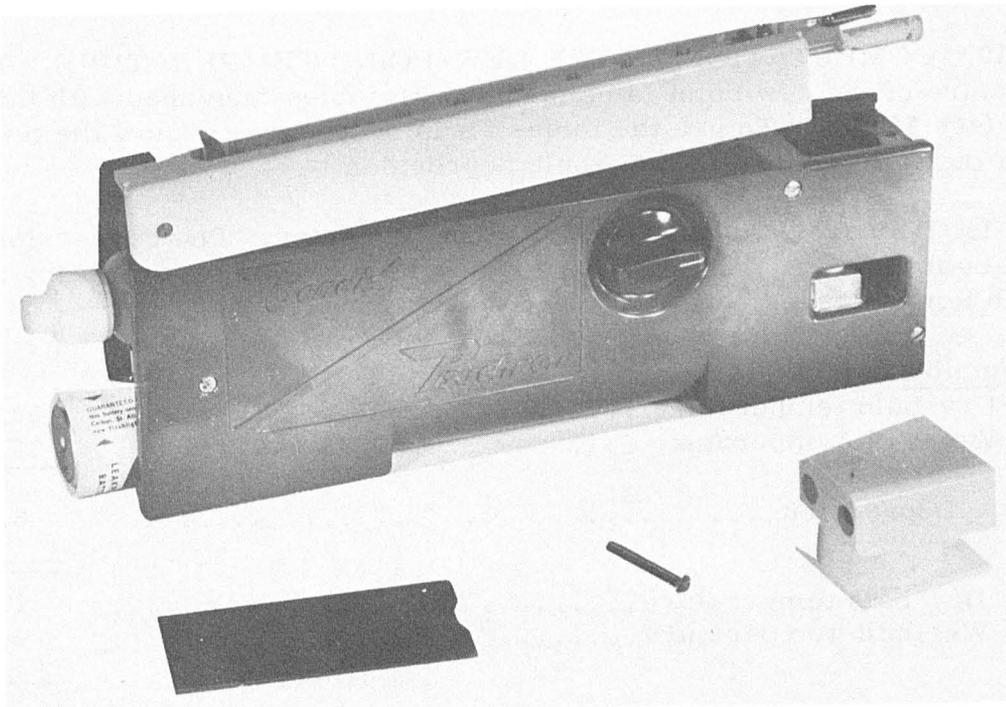


Figure 10.--Psychrometer (Portable, Aspirated, Electric).

7134. Psychrometric Readings. Readings from the dry and wet-bulb thermometers should be obtained in accordance with the following instructions.

7134.1. Saturate the muslin of the wet bulb with clean water. Use care to avoid wetting the dry-bulb thermometer, which must be thoroughly dry before the readings. Ventilate the psychrometer for about 10 seconds and quickly read both thermometers, the wet-bulb thermometer first. Repeat the alternate ventiliating and reading until two successive readings of the wet-bulb thermometer are the same and indicate that the thermometer has reached its lowest temperature.

7134.2. When the wet-bulb temperature is below 32°F., moisten the wet-bulb thermometer with water having a temperature between 65° and 75° F. in order to melt completely any accumulation of ice on the muslin, since a very thin coating is necessary for accurate data. When the psychrometer is ventilated at below freezing temperatures, and there is doubt as to whether the muslin is frozen, the muslin should be brought to the frozen state by touching it with clean ice or snow, or some other object whose temperature is approximately the same as or less than the dry-bulb temperature. After the muslin has become ice-covered, continue to ventilate the psychrometer until successive readings indicate that the lowest wet-bulb temperature has been reached.

7140. COMPUTATION OF THE DEW-POINT TEMPERATURE. The temperature of the dew point is computed with tables furnished with this manual (see §7144). To use the tables, it is necessary to know the temperature of the wet bulb and the wet-bulb depression.

7141. Depression of the Wet-Bulb Thermometer. The depression of the wet-bulb thermometer is the algebraic difference between the dry and wet-bulb temperatures.

Examples:

(1) Dry-bulb temperature	40.6
Wet-bulb temperature	<u>34.1</u>
Depression	6.5
	<hr style="border-top: 3px double #000;"/>
(2) Dry-bulb temperature	1.2
Wet-bulb temperature	<u>-0.7</u>
Depression	1.9
	<hr style="border-top: 3px double #000;"/>

(3) Dry-bulb temperature	-3.4
Wet-bulb temperature	-4.7
	1.3
Depression	1.3

7141. 1. When the wet-bulb is covered with water and a depression cannot be obtained, the dew-point temperature will be regarded as the same as that of the wet-bulb temperature.

7142. Wet-Bulb Above 20° F. After the depression of the wet-bulb has been determined, the wet-bulb temperature and the depression of the wet bulb should be rounded to the nearest 0.5° F., e. g., a temperature of 61.2° is rounded to 61.0; 58.6° to 58.5; 45.3° to 45.5; etc.; and a depression of the wet bulb of 1.8° is rounded to 2.0; 3.6° to 3.5; 4.2° to 4.0; etc.

7143. Wet-Bulb 20° F. and Lower. After the depression of the wet bulb has been determined, round the wet-bulb temperature to the nearest 0.5° F., as in paragraph 7142. The depression of the wet-bulb will be retained to the nearest 0.1° F.

7144. Psychrometric Tables. Table 25, "Temperature of the Dew Point in Degrees Fahrenheit" at the back of this manual, will be used to compute the dew point. To use the tables, find (a) the appropriate wet-bulb temperature in the vertical column printed at the left edge, and (b) the corresponding depression of the wet bulb. Follow (a) horizontally across, and (b) vertically downward. The tabular value at the intersection is the dew point.

Examples:

Dry bulb	Wet bulb	Depression of wet bulb	Wet bulb rounded	Depression of wet bulb rounded	Dew point
69.1	61.3	7.8	61.5	8.0	57
61.5	56.8	4.7	57.0	4.5	54
19.0	16.4	2.6	16.5	Unchanged	6
-10.3	-11.2	0.9	-11.0	Unchanged	-27

7210. GENERAL. The condenser (or comparable) intake thermometer will be read to the nearest 0.2° F. or 0.1° C. at each observation to secure the sea-water temperature. Intake thermometer readings previously entered in the engine room log book will not be used for the weather observation.

7300. CODING AND ENTRIES OF TEMPERATURE DATA ON FORM 615-5

7310. AIR TEMPERATURE (T_T , T_d , T_d). Enter the dry and wet-bulb temperatures to degrees and tenths in columns 27 and 28, respectively. Prefix a minus sign (-) when the temperature is below 0°F. Enter the dry-bulb temperature to the nearest whole degree (two digits) in column 17 (T_T). When the temperature ends in 0.5, increase the preceding digit by one, e. g., 10.5=11. Enter the dew-point temperature (two digits) in column 32 (T_d , T_d). Code tables are not used.

7311. When the temperature is 100° C. or higher, subtract 100 from the actual air temperature and enter the remainder as two digits in column 17, e. g., 107° is entered as 07; 114° is entered as 14; 100° is entered as 00; etc.

7312. When the air temperature or the dew-point temperature is 0° F. or lower, disregard the minus sign and subtract the numerical value from 100. Enter the remainder as two digits in column 17 or 32, respectively, as appropriate, e. g., -15° is entered as 85 (100-15=85); -1° is entered as 99; 0° is entered as 00; etc.

7320. SEA-WATER TEMPERATURE. Enter the temperature of the sea water in degrees Fahrenheit or as reported by the engine room in column 29.

7330. SEA-WATER TEMPERATURE DIFFERENCE (T_s , T_s). Determine the difference between the sea and air temperatures, and enter^s the difference (two digits) in column 31. When the dry-bulb temperature is lower than the sea temperature, add 50 to the difference. EXAMPLE: If the dry-bulb temperature is 25.0 and the sea temperature is 38.0 the difference (13) is added (13+50) and the total is entered in column 31 as 63.

CHAPTER VIII. CLOUDS

CONTENTS

	<u>Page</u>
General	69
Determination of sky cover	69
General	69
Sky quadrants	69
Obscured sky	69
Cloud height	69-70
Coding and entries of cloud data on Form 615-5	70
Fraction of the celestial dome covered by clouds, in eighths....	70
Fraction of celestial dome covered by type of cloud reported	
for C_L (or C_M).....	70
Height of lowest C_L (or C_M) cloud above sea.....	71
Clouds of type C_L	72-73
Clouds of type C_M	74-75
Clouds of type C_H	76-77
Cloud group.....	78

CODE TABLES

Code Table	3. Symbol N --Fraction of the celestial dome covered by clouds, in eighths.....	71
Code Table	3. Symbol N_h --Fraction of celestial dome covered by cloud reported for C_L (or C_M)....	71
Code Table	9. Symbol C_L --Clouds of types stratocumulus, stratus, cumulus, and cumulonimbus.	72-73
Code Table	10. Symbol h --Height of base of lowest C_L (or C_M) cloud above sea.....	71
Code Table	11. Symbol C_M --Clouds of types altocumulus, altostratus, and nimbostratus.....	74-75
Code Table	12. Symbol C_H --Clouds of types cirrus, cirrostratus, and cirrocumulus.....	76-77

CHAPTER VIII. CLOUDS

8000. GENERAL

8001. Code numbers for cloud forms and states of the sky are described in detail in International Cloud Atlas, 1956. Instructions in this chapter are confined to those necessary for observing clouds with respect to their amount and height of base. For easy reference by the observer, cloud pictures of the principal type clouds, their definitions and respective code numbers are included in W. B. Form 615-5.

8100. DETERMINATION OF SKY COVER

8110. GENERAL. "Sky cover" is a term used to denote the amount, in eighths, of sky covered by clouds. The eighths of sky cover plus the eighths of sky visible will always equal 1.0 (8/8).

8120. SKY QUADRANTS. The sky may be regarded as divided into quadrants, with the zenith regarded as the center, and the north, east, south, and west compass points forming the dividing lines. Each quadrant contains 2/8 of the total sky.

8121. Determine the amount of sky cover by use of quadrants as follows:
- (1) Estimate the amount covered by clouds in each quadrant.
 - (2) Add the estimated amounts together. The sum of the amounts will be the sky cover.

Example: If an advancing cloud layer completely covers two quadrants and scattered clouds of another type cover one-half of each of the remaining two quadrants, the total sky cover is $2/8+2/8+1/8+1/8$ or $6/8$.

8130. OBSCURED SKY. When the sky is completely obscured, other than by clouds, e. g., by fog, falling snow, haze, smoke, etc., the sky is classified as "obscured." However, when only a portion of the sky is obscured, estimate the total amount of clouds on the basis of those that are visible.

8200. CLOUD HEIGHT

8201. The height of the lowest cloud layer should be estimated after the type of cloud has been determined by use of the tables in this chapter and photographs in W. B. Form 615-5. Cloud definitions and photographs contained in the International Cloud Atlas and W. B. Form 615-5 are useful guides in estimating the height of clouds. Some indication of the height of the clouds may be obtained from the detail with which the small indentations

on the bottom surface can be observed. At night it may be possible to use a ship's searchlight to observe the cloud base.

8201.1. There is no reliable way to determine exact cloud height by estimation. However, when an observer is required to give his best estimate without the aid of cloud measuring devices, he may resort to one or more methods mentioned in §8201. For clouds caused by convection, such as cumulus, and stratocumulus during high winds, the temperature and dew-point formula may be used to obtain an indication of the level where condensation takes place.

8201.2. The approximate cloud height formula is: Height of clouds = (temperature-dew point) \times 222 feet. Air temperature and dew point are in degrees Fahrenheit. For example, when the air temperature is 65° and the dew point is 56°, the difference of 9 multiplied by the constant 222 gives the approximate height of the convective cloud base, e. g., $9 \times 222 = 2,000$ (to the nearest thousand feet).

8300. CODING AND ENTRIES OF CLOUD DATA ON FORM 615-5

8310. TOTAL CLOUD AMOUNT (N). Select the appropriate code figure from Code Table 3 corresponding to the total amount of sky covered by all types of clouds, and enter the figure in column 7 of Form 615-5. A few clouds or fragments of clouds are entered as "1." If the sky is completely covered (overcast), N is entered as 8; however, if a few patches of sky are visible, N is entered as 7.

8320. FRACTION OF THE CELESTIAL DOME COVERED BY SPECIFIED C_L OR C_M CLOUD - (N_h). Select the code figure from Code Table 3 corresponding to the amount of sky covered by the type or types of cloud reported by C_L (not necessarily the amount of all C_L clouds present), or by C_M clouds when no C_L clouds are present (see §8340 and 8350). Code figure "0" is entered for N_h when there are no C_L or C_M clouds present. Less than one-eighth but more than none (i. e., "fragments") is coded as 1. "Overcast but with openings" (less than eight-eighths but more than seven-eighths) is coded as 7. Code figure 9 is used to report "Sky obscured by fog, rain, snow, smoke or other phenomena or obstruction except clouds."

CODE TABLE 3

SYMBOL N—Fraction of the celestial dome covered by clouds

SYMBOL N_h—Fraction of celestial dome covered by type of cloud reported for C_L (or C_M if no C_L cloud present)

Code figures	Cloud amount (eighths of sky covered)
0	None
1	1 ¹
2	2
3	3
4	4
5	5
6	6
7	7 ²
8	8
9	Sky obscured ³

NOTES

- ¹ "Fragments of clouds" are coded as 1.
- ² "Overcast but with openings" is coded as 7.
- ³ Sky obscured by fog, rain, snow, smoke or other phenomena or obstruction except clouds.

8330. HEIGHT OF LOWEST CLOUD OF TYPES C_L OR C_M--(h). Select the code figure from Code Table 10 corresponding to the height of the lowest cloud (including fragments, i. e., less than 1/8 but more than none) of the classes C_L or C_M and enter the figure in column 20. (Note that this height is not necessarily the height of the base of the lowest cloud reported as C_L or C_M in accordance with §8340 and 8350.) Enter 9 when there are no C_L or C_M clouds present; enter X when the cloud base cannot be reported owing to darkness or any other reason, except that when the sky is obscured by rain, snow, fog, smoke or other phenomena, code "h" as 0 and "N_h" as 9.

Code Table 10

Symbol h. --Height of base of lowest cloud (C_L or C_M) above sea

Code figure	Height in Feet	Height in Meters
0	0- 149.	0- 49.
1	150- 299.	50- 99.
2	300- 599.	100- 199.
3	600- 999.	200- 299.
4	1000-1999.	300- 599.
5	2000-3499.	600- 999.
6	3500-4999.	1000-1499.
7	5000-6499.	1500-1999.
8	6500-7999.	2000-2500.
9	8,000 or higher or no clouds.	2,500 or higher or no clouds.
X	Height cannot be reported owing to darkness or other reason not covered by Note 2 below.	

8340. CLOUDS OF TYPE C_L . Enter the appropriate code figure from Code Table 9. Report the code figure for the predominant type, and when several types are present in equal amounts, report the code figure for the type whose base is at the greatest height above the sea. Exceptions follow:

1. Whenever types coded as 1 and 2 only are present, report code figure 2, regardless of amount.
2. Whenever types coded as 3 or 9 are present, 3 or 9, as appropriate, will be coded, regardless of the amount of other C_L types present.

Code Table 9

Symbol C_L . --Clouds of types, Stratocumulus, Stratus Cumulus, and Cumulonimbus

Code figures	Technical	Non-technical
$C_L = 0$	No C_L - clouds	No Stratocumulus, Stratus, Cumulus or Cumulonimbus
$C_L = 1$	Cumulus humilis or Cumulus fractus other than of bad weather ¹ , or both	Cumulus with little vertical extent and seemingly flattened, or ragged Cumulus other than of bad weather ¹ or both
$C_L = 2$	Cumulus mediocris or congestus, with or without Cumulus of species fractus or humilis or Stratocumulus, all having their bases at the same level	Cumulus of moderate or strong vertical extent, generally with protuberances in the form of domes or towers, either accompanied or not by other Cumulus or by Stratocumulus, all having their bases at the same level
$C_L = 3$	Cumulonimbus calvus, with or without Cumulus, Stratocumulus or Stratus	Cumulonimbus the summits of which, at least partially, lack sharp outlines, but are neither clearly fibrous (cirriform) nor in the form of an anvil; Cumulus, Stratocumulus or Stratus may also be present

Code figures	Technical	Non-technical
$C_L = 4$	Stratocumulus cumulo- genitus	Stratocumulus formed by the spreading out of Cumulus, Cumu- lus may also be present
$C_L = 5$	Stratocumulus other than Stratocumulus cumulo- genitus	Stratocumulus not resulting from the spreading out of Cumulus
$C_L = 6$	Stratus nebulosus or Stratus fractus other than of bad weather ¹ , or both	Stratus in a more or less continu- ous sheet or layer, or in ragged shreds, or both, but no Stratus fractus of bad weather ¹
$C_L = 7$	Stratus fractus or Cumu- lus fractus of bad weath- er ¹ , or both (pannus), usually below Altostra- tus or Nimbostratus	Stratus fractus of bad weather ¹ or Cumulus fractus of bad weather ¹ or both (pannus), usually below Altostratus or Nimbostratus
$C_L = 8$	Cumulus and Stratocu- mulus other than Strato- cumulus cumulogenitus, with bases at different levels	Cumulus and Stratocumulus other than that formed from the spread- ing out of Cumulus; the base of the Cumulus is at a different level from that of the Stratocumulus
$C_L = 9$	Cumulonimbus capilla- tus (often with an anvil) with or without Cumu- lonimbus calvus, Cumu- lus, Stratocumulus, Stratus or pannus	Cumulonimbus, the upper part of which is clearly fibrous (cirriform), often in the form of an anvil, either accompanied or not by Cumulonim- bus without anvil or fibrous upper part, by Cumulus, Stratocumulus, Stratus or pannus
$C_L = x$	C_L -clouds invisible ow- ing to darkness, fog, blowing dust or sand, or other similar phenomena	Stratocumulus, Stratus, Cumulus and Cumulonimbus invisible owing to darkness, fog, blowing dust or sand, or other similar phenomena

¹ "Bad weather" denotes the conditions which generally exist during precipitation and a short time before and after.

8350. CLOUDS OF TYPE C_M . Enter the appropriate code figure from Code Table 11. Report the code figure for the predominant type, and when several types are present in equal amounts, report the code figure for the type whose base is at the greatest height above the sea. Exceptions follow:

1. Whenever Ac (Alto cumulus) are present in a chaotic sky (see International Cloud Atlas), regardless of amount, report code figure 9.
2. Whenever the sky is not chaotic but tufted or turreted altocumulus (see International Cloud Atlas) are present, report code figure 8.

Code Table 11

Symbol C_M . -- Clouds of types Alto cumulus, Altostratus, and Nimbostratus

Code figures	Technical	Non-technical
$C_M = 0$	No C_M -clouds	No Alto cumulus, Altostratus or Nimbostratus
$C_M = 1$	Altostratus translucidus	Altostratus, the greater part of which is semi-transparent; through this part the sun or moon may be weakly visible, as through ground glass
$C_M = 2$	Altostratus opacus or Nimbostratus	Altostratus, the greater part of which is sufficiently dense to hide the sun or moon, or Nimbostratus
$C_M = 3$	Alto cumulus translucidus at a single level	Alto cumulus, the greater part of which is semi-transparent; the various elements of the cloud change only slowly and are all at a single level
$C_M = 4$	Patches (often lenticular) of Alto cumulus translucidus, continually changing and occurring at one	Patches (often in the form of almonds or fishes) of Alto cumulus, the greater part of which is semi-transparent; the clouds occur at

Code figures	Technical	Non-technical
	or more levels	one or more levels and the elements are continually changing in appearance
$C_M = 5$	Alto cumulus translucidus in bands, or one or more layers of Alto cumulus translucidus or opacus, progressively invading the sky; these Alto cumulus clouds generally thicken as a whole	Semi-transparent Alto cumulus in bands, or Alto cumulus in one or more fairly continuous layers (semi-transparent or opaque), progressively invading the sky; these Alto cumulus clouds generally thicken as a whole
$C_M = 6$	Alto cumulus cumulo-genitus (or cumulonim-bogenitus)	Alto cumulus resulting from the spreading out of Cumulus (of Cumulonimbus)
$C_M = 7$	Alto cumulus translucidus or opacus in two or more layers, or Alto cumulus opacus in a single layer, not progressively invading the sky; or Alto cumulus with Altostratus or Nimbostratus	Alto cumulus in two or more layers, usually opaque in places, and not progressively invading the sky; or opaque layer of Alto cumulus, not progressively invading the sky; or Alto cumulus together with Altostratus or Nimbostratus
$C_M = 8$	Alto cumulus castellanus or floccus	Alto cumulus with sproutings in the form of small towers or battlements, or Alto cumulus having the appearance of cumuliform tufts
$C_M = 9$	Alto cumulus of a chaotic sky, generally at several levels	Alto cumulus of a chaotic sky, generally at several levels
$C_M = x$	C_M -clouds invisible owing to darkness, fog, blowing dust or sand or other similar phenomena, or because of a continuous layer of lower clouds	Alto cumulus, Altostratus and Nimbostratus invisible owing to darkness, fog, blowing dust or sand or other similar phenomena, or more often because of the presence of a continuous layer of lower clouds

8360. CLOUDS OF TYPE C_H . Enter the appropriate code figure from Code Table 12. Report the code figure for the predominant type, and when several types are present in equal amounts, report the code figure for the type whose base is at the greatest height above the sea.

Code Table 12

Symbol C_H . --Clouds of types Cirrus, Cirrostratus, and Cirrocumulus

Code figures	Technical	Non-technical
$C_H = 0$	No C_H -clouds	No Cirrus, Cirrocumulus or Cirrostratus
$C = 1$	Cirrus fibratus, sometimes uncinus, not progressively invading the sky	Cirrus in the form of filaments, strands or hooks, not progressively invading the sky
$C_H = 2$	Cirrus spissatus, in patches or entangled sheaves, which usually do not increase and sometimes seem to be the remains of the upper part of a Cumulonimbus; or Cirrus castellanus or floccus	Dense Cirrus, in patches or entangled sheaves, which usually do not increase and sometimes seem to be the remains of the upper part of a Cumulonimbus; or Cirrus with sproutings in the form of small turrets or battlements, or Cirrus having the appearance of cumuli-form tufts
$C_H = 3$	Cirrus spissatus cumulonimbogenitus	Dense Cirrus, often in the form of an anvil, being the remains of the upper part of Cumulonimbus
$C_H = 4$	Cirrus uncinus or fibratus, or both, progressively invading the sky; they generally thicken as a whole	Cirrus in the form of hooks or filaments, or both, progressively invading the sky; they generally become denser as a whole
$C_H = 4$	Cirrus (often in bands) and Cirrostratus, or	Cirrus (often in bands converging towards one point or two opposite

Code figures	Technical	Non-technical
	<p>alone, progressively invading the sky; they generally thicken as a whole, but the continuous veil does not reach 45 degrees above the horizon</p>	<p>points of the horizon) and Cirrostratus, or Cirrostratus alone; in either case, they are progressively invading the sky, and generally growing denser as a whole, but the continuous veil does not reach 45 degrees above the horizon</p>
$C_H = 6$	<p>Cirrus (often in bands) and Cirrostratus, or Cirrostratus alone, progressively invading the sky; they generally thicken as a whole; the continuous veil extends more than 45 degrees above the horizon, without the sky being totally covered</p>	<p>Cirrus (often in bands converging towards one point or two opposite points of the horizon) and Cirrostratus, or Cirrostratus alone; in either case, they are progressively invading the sky, and generally growing denser as a whole, the continuous veil extends more than 45 degrees above the horizon, without the sky being totally covered</p>
$C_H = 7$	<p>Cirrostratus covering the whole sky</p>	<p>Veil of Cirrostratus covering the celestial dome</p>
$C_H = 8$	<p>Cirrostratus not progressively invading the sky and not entirely covering it</p>	<p>Cirrostratus not progressively invading the sky and not completely covering the celestial dome</p>
$C_H = 9$	<p>Cirrocumulus alone, or Cirrocumulus predominant among the C_H-clouds</p>	<p>Cirrocumulus alone; or Cirrocumulus accompanied by Cirrus or Cirrostratus, or both, but Cirrocumulus is predominant</p>
$C_H = x$	<p>C_H-clouds invisible owing to darkness, fog-blowing dust or sand or other similar phenomena, or because of a continuous layer of lower clouds</p>	<p>Cirrus, Cirrocumulus and Cirrostratus invisible owing to darkness, fog, blowing dust or sand or other similar phenomena, or more often because of the presence of a continuous layer of lower clouds</p>

8370. CLOUD GROUP $N_h C_L h C_M C_H$. Instructions for the coding of the individual symbols of this group are contained in §8320-8360.

Example: The coded cloud group 51406 is decoded as follows:

Symbol	Description	Code figure	Meaning
N_h	Fraction of celestial dome covered by C_L cloud (or C_M when no C_L cloud is present).	5	Five-eighths of sky covered with the C_L type cloud (Cumulus).
C_L	Predominant type of C_L cloud	1	Cumulus type clouds with little vertical development.
h	Height of lowest cloud of types C_L or C_M .	4	Height of the base of the lowest cloud is between 1,000 and 2,000 feet above the sea.
C_M	Predominant type of C_M cloud.	0	No clouds of type C_M present.
C_H	Predominant type of C_H cloud.	6	Cirrus and Cirrostratus gradually spreading over sky with the layer extending more than 45° above the horizon.

CHAPTER IX. WAVES

CONTENTS

	<u>Page</u>
General	81
Wave direction	82
Wave period.....	82
General.....	82
Observation.....	82
Wave height.....	83
General.....	83
Determination.....	84
Coding and entries of wave data on Form 615-5.....	84
General.....	84
Direction ($d_w d_w$).....	85
Period (P_w).....	86
Height (H_w).....	86
Wave group.....	88

CODE TABLES

Code Table 4. Symbol $d_w d_w$ --Direction from which waves are coming.....	85
Code Table 17. Symbol P_w --Period of waves.....	86
Code Table 18. Symbol H_w --Mean maximum height of waves.....	87

FIGURES

Figure 11. Section of a trace from a wave recorder.....	81
Figure 12. Wave length and height	83


CHAPTER IX. WAVES

9000. GENERAL

9001. The wave group of the weather message, as entered on Form 615-5, consists of the direction of movement, period, and height of the waves on the surface of the sea. When more than one wave system is present (sea and swell), the direction, period, and height of the waves in each system will be observed and recorded as if they existed alone.

9001.1. The wave record section (columns 33 to 36) of Form WB 615-5 is separated by a dashed line. When two or more wave systems are observed, record the sea data above and the swell below the dashed line. Additional wave data may be recorded under remarks.

9002. Waves in the same system usually occur in a sequence of a few, large, well-formed waves followed by an interval in which only small and poorly formed waves appear, then another series of large, well-formed waves, etc. (see Fig. 11). To obtain uniform waves data from all ships, observers will record only the larger, well-formed waves, and omit entirely the low and poorly formed waves.

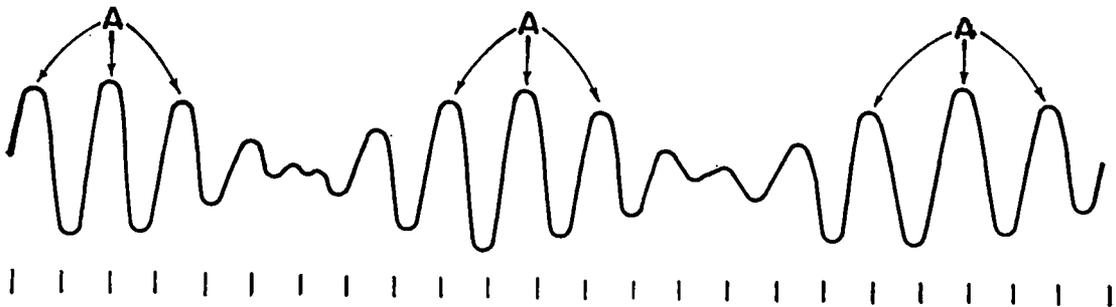

Six Second Intervals

Figure 11. --Section of a trace from an automatic wave recorder illustrating the up-and-down movement of a small object floating on the surface of the sea. In accordance with ¶9002, the height and period of only the well-defined waves (A) of each group will be determined.

9003. Distinction between SEA and SWELL.

- (1) The system of waves raised by the local wind blowing at the time of observation is usually referred to as "SEA."

- (2) Those waves not raised by the local wind blowing at the time of observation, but due either to winds blowing at a distance or to winds that have ceased to blow, are known collectively as "SWELL."
- (3) Usually one swell train dominates the rest, but occasionally two swell trains crossing at an angle may be observed. These are referred to as "CROSS SWELLS."

9004. For additional wave observation techniques, see Training Paper No. 14, "Observing and Reporting Sea and Swell."

9100. WAVE DIRECTION

9101. Wave direction, like wind direction, is the direction from which the waves are coming. The wave direction is determined with reference to true north (360°), and is recorded to the nearest ten degrees in tens of degrees; e. g., 237° is recorded as 24.

9102. Wave direction may be determined by eye observation or, more accurately, by sighting from a compass along the wave crests and adding or subtracting 90° . Ship's heading can also be used as a guide to determine the direction from which the waves are approaching. The higher the observation point, the easier it is to determine wave direction. The average of several observations should be used as the reported wave direction.

9200. WAVE PERIOD

9210. GENERAL. The wave period is the interval in seconds between the passage of two successive crests of well-formed waves past a fixed point (see Fig. 11). The interval can be timed with a stop watch or an ordinary watch with a seconds hand.

9220. OBSERVATION. Determine the period as follows:

- (1) Select a distinctive patch of foam or a small floating object at some distance from the ship. Select a new patch of foam from time to time as the old one falls astern.
- (2) Note the elapsed time to the nearest second between the moments when the object is on the crest of the first and of the last well-formed wave in the group. Also note the number of crests that pass under the object during the interval. Continue the observation until at least 15 well-formed waves have been timed.

- (3) Add the elapsed times of the various groups together and divide the total by the number of waves to obtain the average period.
 Example: The observer might make the following observation to determine the wave period:

Wave group No.	Number of well-formed waves	Time elapsed (seconds)
1	3	44
2	4	57
3	4	62
4	3	43
5	3	46
Total.....	17	252
Average period.. 252 divided by 17 = 14.8 seconds		

The wave period should be recorded to the nearest second, e.g., as 15 seconds.

9300. WAVE HEIGHT

9310. GENERAL. The height of a wave is the vertical distance between a crest and the troughs on either side of it (see Fig. 12). The wave height, as recorded on Form 615-5, is the average of the estimated heights of the larger, well-formed waves (see §9002).

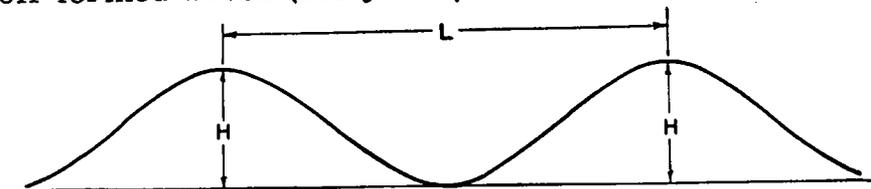


Figure 12. --Wave length and height.

- (1) The wave length (L) is the horizontal distance between successive crests, or troughs.
- (2) The height (H) is the vertical distance between crest and trough.
- (3) The wave speed is the distance traveled by a wave in a unit of time.
- (4) The period is the interval of time which elapses between the passage of any two successive crests past a fixed point; that is, each crest advances one wave length in a time equal to one period. It is the wave length divided by the wave speed.

9320. DETERMINATION. In general, the wave height should be estimated from the best available point on the ship that permits the height of the waves to be compared to the height of the ship. If the observer is free to move about the vessel, the wave height should be determined in accordance with the following paragraphs.

9321. When the wave length is the same as or less than the length of the ship, the height of the waves should be observed and estimated from a low point on the ship, if possible. The point of observation should be chosen amidships, where the pitching of the vessel is at a minimum. The wave height should be estimated when the ship is on an even keel in the following manner:

- (1) The height of the waves from trough to crest may be estimated against the side of another ship when in company.
- (2) Look over the side and compare the height of waves with known points on the side of the ship.

9322. When the wave length is greater than the length of the ship, an observation may be made as follows:

- (1) When in a trough of a wave and the ship is on even keel, the observer may move up and down (if possible) on the ship's structure until wave crests appear momentarily on a horizontal plain with the height of the eye. The wave height is then equal to the height of the observer's eyes above the water line.
- (2) When in company with another ship and the observer's ship is on even keel, determine the amount of the observed ship that is obscured when it is in a trough. The height of the waves may be estimated by judging the size of the ship and the height of her bridge above the water line.

9323. When both sea and swell or two systems of swell are present at the same time, observations will be more difficult. Estimate the higher system of waves first, then repeat the process for the lower system.

9400. CODING AND ENTRIES OF WAVE DATA ON FORM 615-5

9410. GENERAL. Code the wave observation and enter the code figures in Form 615-5.

9411. When more than one wave system can be distinguished at a time of observation, code each wave system separately and enter each code group in the column headed "Waves" of Form 615-5. Enter additional groups, if any, below the first entry.

9420. DIRECTION ($d_w d_w$). Select the code figure from Code Table 4 corresponding to the direction from which the waves came, and enter the value in column 34 of Form 615-5. When the wave height is greater than 15 feet, add 50 to the coded wave direction, e. g., the direction of waves coming from 320° with a height of 20 feet would be entered in column 34 as "82" (32+50).

Code Table 4

SYMBOL $d_w d_w$. --Direction, in 10's of degrees, FROM which waves are coming

Code figure	Direction	Code figure	Direction
00	Calm.	21	205° to 214°.
01	5° to 14°.	22	215° to 224°.
02	15° to 24°.	23	225° to 234°.
03	25° to 34°.	24	235° to 244°.
04	35° to 44°.	25	245° to 254°.
05	45° to 54°.	26	255° to 264°.
06	55° to 64°.	27	265° to 274°.
07	65° to 74°.	28	275° to 284°.
08	75° to 84°.	29	285° to 294°.
09	85° to 94°.	30	295° to 304°.
10	95° to 104°.	31	305° to 314°.
11	105° to 114°.	32	315° to 324°.
12	115° to 124°.	33	325° to 334°.
13	125° to 134°.	34	335° to 344°.
14	135° to 144°.	35	345° to 354°.
15	145° to 154°.	36	355° to 4°.
16	155° to 164°.		
17	165° to 174°.	49	Waves confused, direction indeterminate.
18	175° to 184°.		
19	185° to 194°.		
20	195° to 204°.	99	Waves confused, direction indeterminate, but higher than 14 feet (4-1/2 meters).

9430. PERIOD (P_w). Select the code figure from Code Table 17 corresponding to the average wave period, and enter the figure in column 35.

Code Table 17

SYMBOL P_w . --Period of waves

Code figure	Period
2	5 seconds or less.
3	5 to 7 seconds.
4	7 to 9 seconds.
5	9 to 11 seconds.
6	11 to 13 seconds.
7	13 to 15 seconds.
8	15 to 17 seconds.
9	17 to 19 seconds.
0	19 to 21 seconds.
1	Over 21 seconds.
x	Calm, or period indeterminate.

Note. --If the exact number of seconds for the period of the waves corresponds to two code figures, the lower code figure is reported.

9440. HEIGHT (H_w). Select the code figure from Code Table 18 corresponding to the average wave height, and enter the figure in column 36. When the wave height is greater than 15 feet, add 50 to the code figure for the wave direction (see §9420).

Code Table 18

SYMBOL H_w --Mean maximum height of waves

Code figure	Height
0	Less than 1 foot (1/4 meter).
1	1-1/2 feet (1/2 meter).
2	3 feet (1 meter).
3	5 feet (1-1/2 meters).
4	6-1/2 feet (2 meters).
5	8 feet (2-1/2 meters).
6	9-1/2 feet (3 meters).
7	11 feet (3-1/2 meters).
8	13 feet (4 meters).
9	14 feet (4-1/2 meters).
x	Height impossible to determine. (When 50 is added to $d_w d_w$ the height of waves is as follows):
0	16 feet (5 meters).
1	17-1/2 feet (5-1/2 meters).
2	19 feet (6 meters).
3	21 feet (6-1/2 meters).
4	22-1/2 feet (7 meters).
5	24 feet (7-1/2 meters).
6	25-1/2 feet (8 meters).
7	27 feet (8-1/2 meters).
8	29 feet (9 meters).
9	30-1/2 feet (9-1/2 meters).
x	Height impossible to determine.

- Notes. --1 - Each code figure except "zero" covers a range of 1/2 meter; e. g., code figure 1=1/4 meter to 3/4 meter, code figure 2=3/4 meter to 1-1/4 meters.
- 2 - If the wave height is exactly between the heights corresponding to two code figures, the lower code figure is reported.
- 3 - For wave heights greater than 31 feet (9-3/4 meters), the code figure for 30-1/2 feet (9-1/2 meters) is reported, followed by the word "WAVES" and the actual height of the waves in feet or meters; e. g., "WAVES 37."

9450. WAVE GROUP. The symbols for the direction (d_w), period (P_w), and height (H_w) of the waves combine to form the wave group " $d_w P_w H_w$," where "1" is the group indicator.

Example: The coded wave group "12768" is decoded as follows:

- 1--group indicator.
- 27--waves are coming from the west (270°).
- 6--wave period of 11 to 13 seconds.
- 8--wave height of 13 feet.

9450.1. When more than one wave system is observed, code each system separately:

Example: The coded wave groups "12939 and 12157" are decoded as follows:

- (a) Sea waves group:
 - 1--Group indicator.
 - 29--The sea is from 290° .
 - 3--Period of sea waves is 6 seconds.
 - 9--Height of sea waves is 14 feet.
- (b) Swell group:
 - 1--Group indicator.
 - 21--Swell direction is from 210° .
 - 5--Period of swell is 10 seconds.
 - 7--Height of swell is 12 feet.

X ICE

CHAPTER X. ICE

CONTENTS

	<u>Page</u>
General	91
Ice observation.....	91
General	91
Kind of ice	91-92
Bearing, distance, and orientation.....	92
Coding and entry of ice data on Form 615-5.....	92
General	92
Kind (c_2)	92
Effect on navigation (K)	93
Bearing of ice-limit (D_1)	94
Distance to ice-limit from reporting ship(r)	95
Orientation of ice-limit (e).....	96
Reporting icebergs.....	96
Ice group	96

CODE TABLES

Code Table 19. --Symbol c_2 --Description of kind of ice	93
Code Table 20. --Symbol K--Effect of ice on navigation	93
Code Table 21. --Symbol D_1 --Bearing of ice-limit	94
Code Table 22. --Symbol r--Distance to ice from reporting ship	95
Code Table 23. --Symbol e--Orientation of ice-limit	96

CHAPTER X. ICE

10000. GENERAL

10001. The presence of ice at sea, including icebergs, is recorded as part of the weather observation on Form 615-5 when ice is visible, or has been observed at a point within a distance of 30 miles from the ship's position at the time of the weather observation.

10002. The reporting of icebergs or sea-ice in connection with the weather report is not to take the place of the reporting of sea-ice and icebergs according to the International Convention for the Safety of Life at Sea. Reports requested by the United States Hydrographic Office, Coast Guard, etc., will be submitted in addition to the weather report.

10100. ICE OBSERVATION

10110. **GENERAL.** The ice observation includes determination of the kind of ice, the effect of the ice on navigation, the bearing of the ice-limit, the distance to the ice-limit, and the orientation of the ice-limit.

10120. **KIND OF ICE.** Ice is observed in terms of the most important or prominent of the following conditions:

- (1) Ice-blink. When observed, determine the bearing of the blink. Ice-blink is the white or yellowish-white glare on the sky produced by the reflection of considerable areas of sea-ice or land-ice, which may be beyond the range of vision.
- (2) New-Ice. A general term which includes the following types:
 - (a) Ice-crystals (frazil-crystals) are fine spicules or plates of ice suspended in water.
 - (b) Slush (sludge) is an accumulation of ice-crystals which remain separate or only slightly frozen together. It forms a thin layer and gives the sea surface a grayish or leaden-tinted color. With light winds no ripples appear.
 - (c) Pancake-ice is composed of pieces of newly formed ice, usually approximately circular, about 30 cm. (11.8 in.) to 3 m. (9.84 ft.) across, and with raised rims, due to the pieces striking against each other, as the result of wind and swell.
 - (d) Ice-rind is a thin, elastic, shining crust of ice, formed by the freezing of flush (sludge) on a quiet sea surface. Thickness less than 5 cm. (1.97 in.). It is easily broken by wind or swell, and makes a tinkling noise when passed through by a ship.
- (3) Fast-Ice. Observe whether the amount is unusually great (heavy). Fast-ice is a sea-ice which remains fast, generally in the position

where originally formed, and which may attain a considerable thickness. It is found along coasts, where it is attached to the shore, or over shoals, where it may be held in position by islands, grounded icebergs or grounded polar-ice. Subdivisions are Winter fast-ice and Polar fast-ice.

- (4) Drift-Ice. Observe whether the amount is unusually great (heavy). Drift-Ice (Pack-ice) is a term used in a wide sense to include any area of sea-ice, other than fast-ice, no matter what form it takes or how disposed.
- (5) Packed (compact) slush, or packed strips of hummocked-ice. Note that this condition involves drift-ice (pack-ice), and more than that, the condition of the ice being packed into a compact mass, under the influence of wind, swell, or current. When hummocked-ice is run together in the foregoing manner to form a long narrow area of pack-ice, about 1 km. (0.54 nautical mile) or less in width, it is also termed a strip (stream or string).
- (6) Presence of leads near the shore. A lead (lane) is a navigable passage through drift-ice. It may be so named even if covered with young-ice.
- (7) Hummocked ice. Hummocked ice refers to ice piled haphazardly, one piece over another.
- (8) Ice jamming. This term refers to the action of ice that is being squeezed or crowded together into a compact mass.
- (9) Icebergs. An iceberg is a large mass of floating or stranded ice, more than 5 m. (16.4 ft.) above sea level, which has broken away either from a glacier or from a shelf-ice formation.

10130. BEARING, DISTANCE, AND ORIENTATION. When ice is present, estimate the distance to the nearest part of the ice (ice-limit) and determine the bearing to 8 points of the compass. When the ice-field is so arranged that a fairly definite edge is seen, determine the orientation of the nearest edge; i. e., whether the edge lies in a northeast to southwest direction, etc.

10200. CODING AND ENTRY OF ICE DATA ON FORM 615-5

10210. GENERAL. Ice observed at sea is coded and entered on Form 615-5 as described below.

10220. KIND (c₂). Select the code figure from Code Table 19 that most nearly corresponds with the predominant kind of ice observed, and enter the figure in column 37.

Code Table 19

SYMBOL c_2 . --Description of kind of ice

Code figure	Description
0	None or "ice-blink." ¹
1	New ice.
2	Fast ice.
3	Pack ice/drift ice.
4	Packed (compact) flush or sludge.
5	Shore lead.
6	Heavy fast-ice.
7	Heavy pack ice/drift ice.
8	Hummocked-ice.
9	Icebergs. ²

¹ When ice-blink is recorded, its bearing (symbol D_i) should also be recorded and reported.

² Icebergs can also be reported in plain language.

10230. EFFECT ON NAVIGATION (K). Select the code figure from Table 20 that most accurately describes the effect of the ice on navigation, and enter the figure in column 38.

Code Table 20

SYMBOL K. --Effect of ice on navigation

Code figure	Description
0	Navigation unobstructed.
1	Navigation unobstructed for steamers; difficult for sailing ships.
2	Navigation difficult for low-powered steamers; closed to sailing ships.
3	Navigation possible only for powerful steamers.
4	Navigation possible only for steamers constructed to withstand ice pressure.
5	Navigation possible with the assistance of icebreakers.
6	Channel open in the solid ice.
7	Navigation temporarily closed.
8	Navigation closed.
9	Navigation conditions unknown (e. g., owing to bad weather).

10240. BEARING OF ICE-LIMIT (D_1). Select the code figure from Code Table 21 corresponding to the bearing of the nearest part of the ice, and enter the figure in column 39. If an ice-blink was recorded under "Kind (c_2)," report the bearing of the blink. When more than one area of ice is observed, record code figure "9" unless one area is of outstanding importance to navigation, in which case the bearing of the ice-limit for that area only will be recorded.

Code Table 21

SYMBOL D. --Bearing of ice-limit

Code figure	Description
0	No ice limit can be stated.
1	Ice limit towards NE.
2	Ice limit towards E.
3	Ice limit towards SE.
4	Ice limit towards S.
5	Ice limit towards SW.
6	Ice limit towards W.
7	Ice limit towards NW.
8	Ice limit towards N.
9	Ice limit in several directions.

NOTE. --If more than 1 ice limit can be stated, the nearest or most important is reported.

10250. DISTANCE TO ICE-LIMIT FROM REPORTING SHIP (r). Select the code figure from Code Table 22 corresponding to the distance from the ship to the edge of the ice (bearing given as D_i), and enter the figure in column 40.

Code Table 22

SYMBOL r . --Distance to ice-limit from reporting ship

Code figure	Distance
0	Up to 1 mile.
1	1 to 2 miles.
2	2 to 4 miles.
3	4 to 6 miles.
4	6 to 8 miles.
5	8 to 12 miles.
6	12 to 16 miles.
7	16 to 20 miles.
8	More than 20 miles
9	Unspecified or no observations.

NOTE. --If the exact bounding distance for the ice limit corresponds to 2 code figures, the lower code figure is reported.

10260. ORIENTATION OF ICE-LIMIT (e). Select the code figure from Code Table 23 corresponding to the orientation of the edge of the ice (the same edge as reported in D_1 and r), and enter the figure in column 41.

Code Table 23

SYMBOL e. --Orientation of ice-limit

Code figure	Orientation of ice-limit
0	Orientation of ice-limit impossible to estimate--ship <u>outside</u> the ice.
1	Ice-edge lying in a direction NE. to SW. with ice situated to the NW.
2	Ice-edge lying in a direction E. to W. with ice situated to the northward.
3	Ice-edge lying in a direction SE. to NW. with ice situated to the NE.
4	Ice-edge lying in a direction S. to N. with ice situated to the eastward.
5	Ice-edge lying in a direction SW. to NE. with ice situated to the SE.
6	Ice-edge lying in a direction W. to E. with ice situated to the southward.
7	Ice-edge lying in a direction NW. to SE. with ice situated to the SW.
8	Ice-edge lying in a direction N. to S. with ice situated to the westward.
9	Orientation of ice-limit impossible to estimate--ship <u>inside</u> the ice.

10270. REPORTING ICEBERGS. When icebergs are observed, record their size and height above the sea in the column headed "Remarks."

10280. ICE GROUP. The symbols for the kind (c_2), effect (K), bearing (D_1), distance (r), and orientation (e) of the ice combine to form the ice group "ICE c_2KD_1re ," where "ICE" is the group indicator.

Example: The coded group "ICE 10423" is decoded as follows:

ICE--group indicator.

1--new ice present.

0--navigation unobstructed.

4--Ice-limit toward south.

2--Ice-limit 2 to 4 miles away (south).

3--Ice-limit lying in a direction SE. to NW. with the ice situated to the NE.

CODE TABLES

Code Table No.	Page
1 Symbol Y—Day of the week.....	98
2 Symbol Q—Octant of the globe.....	98
3 Symbol N—Fraction of the celestial dome covered by clouds, in eighths.....	98
Symbol N _h —Fraction of celestial dome covered by type of cloud reported for C _L (or C _M).....	98
4 Symbol dd—True direction from which wind is blowing.....	99
Symbol d _w d _w —Direction from which waves come.....	99
5 Symbol VV—Visibility.....	99
6 Symbol ww—Present weather.....	100
7 Symbol W—Past weather.....	102
8 Symbol PPP—Corrected barometric pressure.....	103
9 Symbol C _L —Clouds of types stratocumulus, stratus, cumulus, and cumulonimbus.....	104
10 Symbol h—Height of base of lowest C _L (or C _M) cloud above sea.....	105
11 Symbol C _M —Clouds of types altocumulus, altostratus, and nimbostratus.....	105
12 Symbol C _H —Clouds of types cirrus, cirrostratus, and cirrocumulus.....	106
13 Symbol D _s —Ship's course.....	107
14 Symbol v _s —Ship's speed.....	107
15 Symbol a—Barometer change characteristics in the last 3 hours.....	107
16 Symbol pp—Amount of barometric change in last 3 hours.....	108
17 Symbol P _w —Period of waves.....	109
18 Symbol H _w —Mean maximum height of waves.....	109
19 Symbol c ₂ —Description of kind of ice.....	110
20 Symbol K—Effect of ice on navigation.....	110
21 Symbol D ₁ —Bearing of ice-limit.....	110
22 Symbol r—Distance to ice from reporting ship.....	111
23 Symbol e—Orientation of ice-limit.....	111

MISCELLANEOUS TABLES

Table No.	Page
24 Celsius (centigrade) to Fahrenheit temperatures.....	112
25 Temperature of dew point in degrees Fahrenheit.....	114
26 Millimeters to millibars.....	122
27 Correction of mercurial barometer for temperature.....	123
28 Reduction of barometric reading to mean sea level.....	124
29 Reduction of mercurial barometer to standard gravity.....	124
30 Q-Code signals (selected).....	125

CHARTS

Chart No.	Page
1 Greenwich and local time.....	127

CODE TABLE 1

SYMBOL Y.—*Day of the week*

Day	Code figure
Sunday.....	1
Monday.....	2
Tuesday.....	3
Wednesday.....	4
Thursday.....	5
Friday.....	6
Saturday.....	7

CODE TABLE 2

SYMBOL Q.—*Octant of the globe*

Longitude	Code figure
North latitude:	
0° W. to 90° W.....	0
90° W. to 180° W.....	1
180° E. to 90° E.....	2
90° E. to 0° E.....	3
South latitude:	
0° W. to 90° W.....	5
90° W. to 180° W.....	6
180° E. to 90° E.....	7
90° E. to 0° E.....	8

CODE TABLE 3

SYMBOL N—*Fraction of the celestial dome covered by clouds*SYMBOL N_b—*Fraction of celestial dome covered by type of cloud reported for C_L (or C_M if no C_L cloud present)*

Code figure	Cloud amount (eighths of sky covered)
0	None
1	¹ 1
2	2
3	3
4	4
5	5
6	6
7	² 7
8	8
9	Sky obscured ³

NOTES.—(1) "Fragments of clouds" are coded as 1. (2) "Overcast but with openings" is coded as 7. (3) Sky obscured by fog, rain, snow, smoke or other phenomena or obstruction except clouds, or cloud amount cannot be estimated.

TABLES

CODE TABLE 4

SYMBOL *dd*.—True direction, in 10's of degrees, FROM which wind is blowing (00-36)

SYMBOL *d_wd_w*.—Direction, in 10's of degrees, FROM which waves are coming

Code figure	Direction	Code figure	Direction
00	Calm.	19	185° to 194°.
01	5° to 14°.	20	195° to 204°.
02	15° to 24°.	21	205° to 214°.
03	25° to 34°.	22	215° to 224°.
04	35° to 44°.	23	225° to 234°.
05	45° to 54°.	24	235° to 244°.
06	55° to 64°.	25	245° to 254°.
07	65° to 74°.	26	255° to 264°.
08	75° to 84°.	27	265° to 274°.
09	85° to 94°.	28	275° to 284°.
10	95° to 104°.	29	285° to 294°.
11	105° to 114°.	30	295° to 304°.
12	115° to 124°.	31	305° to 314°.
13	125° to 134°.	32	315° to 324°.
14	135° to 144°.	33	325° to 334°.
15	145° to 154°.	34	335° to 344°.
16	155° to 164°.	35	345° to 354°.
17	165° to 174°.	36	355° to 4°.
18	175° to 184°.		
Used only with <i>d_wd_w</i>			
49	Waves confused, direction indeterminate.	99	Waves confused, direction indeterminate, but higher than 14 feet (4½ meters).

NOTE.—In case the true wind speed exceeds 99 knots, 50 will be added to "dd" and only the wind speed in excess of 100 knots will be coded. For example, if the direction=163° and speed=121 knots, the wind will be coded as "6621" (dd=16+50; ff=121-100).

CODE TABLE 5

SYMBOL *VV*.—Visibility

Code figure	Visibility range ¹
90	Less than 50 yards (50 meters).
91	50 yards (50 meters).
92	200 yards (200 meters).
93	¼ nautical mile (500 meters).
94	½ nautical mile (1,000 meters).
95	1 nautical mile (2,000 meters).
96	2 nautical miles (4,000 meters).
97	5 nautical miles (10 kilometers).
98	10 nautical miles (20 kilometers).
99	25 nautical miles (50 kilometers) or more.

1. In case the observed visibility is between two of the distances given in the table, the code figure for the lesser distance will be reported, e. g., when the visibility is between 50 and 200 yards, code the visibility as 91.

CODE TABLE 6

SYMBOL *ww*—*Present weather*¹

00-49 NO PRECIPITATION AT THE SHIP AT THE TIME OF OBSERVATION

00-19: NO PRECIPITATION, FOG, DUSTSTORM, SANDSTORM OR DRIFTING SNOW AT THE SHIP AT THE TIME OF OBSERVATION OR DURING THE PRECEDING HOUR, EXCEPT FOR 09-12.

- See note 2. }
 Haze, dust, sand or smoke. }
 00 Cloud development not observed } Characteristic change of the
 01 Clouds generally dissolving or becoming less developed } state of sky during the
 02 State of sky on the whole unchanged } past hour.
 03 Clouds generally forming or developing }
 04 Visibility reduced by smoke, e. g., veldt or forest fires, industrial smoke, or volcanic ashes.
 05 Haze.
 06 Widespread dust in suspension in the air, not raised by wind at or near the ship at the time of observation.
 07 Dust or sand raised by wind at or near the ship at the time of observation, but no well developed dust devil(s) and no duststorm or sandstorm seen.
 08 Well developed dust devil(s) seen at or near the ship within last hour, but no duststorm or sandstorm.
 09 Duststorm or sandstorm within sight of ship or at ship during the last hour.
 10 Light, fog, visibility 1,000 meters (1,100 yards) or more.
 11 Patches of } Shallow fog at ship not deeper than 10 meters (33 feet), visibility in fog less than
 12 More or less continuous } 1,000 m. (1,100 yds.).
 13 Lightning visible, no thunder heard.
 14 Precipitation within sight, but not reaching sea at the ship.
 15 Precipitation within sight, reaching sea, but distant (i. e., estimated to be more than 5 kilometers (3 miles) from ship).
 16 Precipitation within sight, reaching sea, near to but not at the ship.
 17 Thunder heard, but no precipitation at the ship.
 18 Squall(s)
 19 Funnel cloud(s) (tornado or waterspout) } within sight during the past hour.

20-29: PRECIPITATION, FOG OR THUNDERSTORM AT THE SHIP DURING THE PRECEDING HOUR BUT NOT AT THE TIME OF OBSERVATION.

- 20 Drizzle (not freezing)
 21 Rain (not freezing)
 22 Snow } not falling as showers.
 23 Rain and snow
 24 Freezing drizzle or freezing rain
 25 Shower(s) of rain.
 26 Shower(s) of snow, or of rain and snow.
 27 Shower(s) of hail, or of hail and rain.
 28 Fog (visibility less than 1,000 meters (1,100 yards)).
 29 Thunderstorm (with or without precipitation).

30-39: DUSTSTORM, SANDSTORM, OR DRIFTING SNOW.

- 30 Slight or moderate duststorm or sandstorm—has decreased during the preceding hour.
 31 Slight or moderate duststorm or sandstorm—no appreciable change during the preceding hour.
 32 Slight or moderate duststorm or sandstorm—has increased during the preceding hour.
 33 Severe duststorm or sandstorm—has decreased during the preceding hour.
 34 Severe duststorm or sandstorm—no appreciable change during preceding hour.
 35 Severe duststorm or sandstorm—has increased during the preceding hour.
 36 Slight or moderate drifting snow } generally 10 meters (33 ft.) or below at sea.
 37 Heavy drifting snow
 38 Slight or moderate drifting snow } generally above 10 meters (33 ft.) at sea.
 39 Heavy drifting snow

40-49: FOG AT THE TIME OF OBSERVATION (visibility less than 1,000 meters (1,100 yards)).

- 40 Fog at a distance at the time of observation, but not at the ship during the last hour, the fog extending to a level above that of the observer.
 41 Fog in patches.
 42 Fog, sky discernible } has become thinner during the preceding hour.
 43 Fog, sky not discernible }
 44 Fog, sky discernible } no appreciable change during the preceding hour.
 45 Fog, sky not discernible }
 46 Fog, sky discernible } has begun or has become thicker during the preceding hour.
 47 Fog, sky not discernible }
 48 Fog, depositing rime, sky discernible.
 49 Fog, depositing rime, sky not discernible.

¹ In general, when coding *ww* the highest applicable figure is selected.² The amount of cloudiness at the time of observation is reported by symbol "N" in the group "Nddff." Code figures 00 to 03, inclusive, are used only when there is no other applicable code figure in the "*ww*" table to report. Code figure 00 is used when the observer has not had an opportunity to observe cloud development during the hour preceding the time of observation; 01 for clouds generally dissolving or becoming less developed; 02 for state of sky on the whole unchanged and 03 for clouds generally forming or developing.³ Visibility less than 1,000 meters (1,100 yards).

50-99 PRECIPITATION: AT THE SHIP AT THE TIME OF OBSERVATION

50-59: DRIZZLE AT TIME OF OBSERVATION.

- 50 Drizzle, not freezing, intermittent ¹ } slight at time of observation.
- 51 Drizzle, not freezing, continuous } moderate at time of observation.
- 52 Drizzle, not freezing, intermittent ¹ } moderate at time of observation.
- 53 Drizzle, not freezing, continuous } thick at time of observation.
- 54 Drizzle, not freezing, intermittent ¹ } thick at time of observation.
- 55 Drizzle, not freezing, continuous } thick at time of observation.
- 56 Drizzle, freezing, slight.
- 57 Drizzle, freezing, moderate or thick.
- 58 Drizzle and rain, slight.
- 59 Drizzle and rain, moderate or heavy.

60-69: RAIN AT TIME OF OBSERVATION.

- 60 Rain, not freezing, intermittent ¹ } slight at time of observation.
- 61 Rain, not freezing, continuous } moderate at time of observation.
- 62 Rain, not freezing, intermittent ¹ } moderate at time of observation.
- 63 Rain, not freezing, continuous } heavy at time of observation.
- 64 Rain, not freezing, intermittent ¹ } heavy at time of observation.
- 65 Rain, not freezing, continuous } heavy at time of observation.
- 66 Rain, freezing, slight.
- 67 Rain, freezing, moderate or heavy.
- 68 Rain or drizzle and snow, slight.
- 69 Rain or drizzle and snow, moderate or heavy.

70-79: SOLID PRECIPITATION NOT IN SHOWERS AT TIME OF OBSERVATION.

- 70 Intermittent ¹ fall of snowflakes } slight at time of observation.
- 71 Continuous fall of snowflakes } moderate at time of observation.
- 72 Intermittent ¹ fall of snowflakes } moderate at time of observation.
- 73 Continuous fall of snowflakes } moderate at time of observation.
- 74 Intermittent ¹ fall of snowflakes } heavy at time of observation.
- 75 Continuous fall of snowflakes } heavy at time of observation.
- 76 Ice needles (with or without fog).
- 77 Granular snow (with or without fog).
- 78 Isolated starlike snow crystals (with or without fog).
- 79 Ice pellets. (Sleet, U.S. definition).

80-99: SHOWERY PRECIPITATION, OR PRECIPITATION WITH CURRENT OR RECENT THUNDER-STORM.

- 80 Rain shower(s), slight.
- 81 Rain shower(s), moderate or heavy.
- 82 Rain shower(s), violent.
- 83 Shower(s) of rain and snow mixed, slight.
- 84 Shower(s) of rain and snow mixed, moderate or heavy.
- 85 Snow shower(s), slight.
- 86 Snow shower(s), moderate or heavy.
- 87 Shower(s) of soft or small hail, with or without rain, or rain and snow mixed—slight.
- 88 Shower(s) of soft or small hail, with or without rain, or rain and snow mixed—moderate or heavy.
- 89 Shower(s) of hail, with or without rain, or rain and snow mixed, not associated with thunder—slight.
- 90 Shower(s) of hail, with or without rain, or rain and snow mixed, not associated with thunder—moderate or heavy.
- 91 Slight rain at time of observation
- 92 Moderate or heavy rain at time of observation
- 93 Slight snow or rain and snow mixed or hail ² at time of observation
- 94 Moderate or heavy snow, or rain and snow mixed or hail ² at time of observation
- 95 Thunderstorm, slight or moderate, without hail ² but with rain and/or snow at time of observation
- 96 Thunderstorm, slight or moderate, with hail ² at time of observation
- 97 Thunderstorm, heavy, without hail ² but with rain and/or snow at time of observation
- 98 Thunderstorm combined with duststorm or sandstorm ²—at time of observation
- 99 Thunderstorm, heavy, with hail ² at time of observation

} thunderstorm during the preceding hour but not at time of observation.

} thunderstorm at time of observation.

¹ Whenever the description "intermittent" is used, precipitation has not continued without a break during the preceding hour.
² Hail, small hail, soft hail.
³ Code ww as 98, even when precipitation does not accompany the thunderstorm and dust or sandstorm.

CODE TABLE 7

SYMBOL W.—*Past weather*

Code figure	Description
0	Clear or few clouds.
1	Partly cloudy or variable sky.
2	Cloudy or overcast.
3	Sandstorm or duststorm, or drifting or blowing snow.
4	Fog, smoke, dust, or haze.
5	Drizzle.
6	Rain.
7	Snow, rain and snow mixed, or sleet.
8	Shower(s).
9	Thunderstorm, with or without precipitation.

NOTES

1. In 0000, 0600, 1200 and 1800 G. C. T. reports, "Past Weather" covers the preceding 6-hour period while in 0300, 0900, 1500, and 2100 G. C. T. reports, "W" covers the preceding 3-hour period (see par. 5820).
2. The code figure for "W" is selected in order that "W" and "ww" together give as complete a description as possible of the weather in the time interval concerned. For example, if the type of weather undergoes a complete change during the time interval concerned, the code figure selected for "W" will describe the weather prevailing before the type of weather indicated by "ww" began.

TABLES

CODE TABLE 8

SYMBOL PPP.—Corrected barometer reading

(Code in "tens," "units," and "tenths" of millibars, omit initial 9 or 10)

[1 inch=33.86395 mb. 1 mb.=0.02952993 inch]¹

in.	mb.	in.	mb.	in.	mb.	in.	mb.								
27.50	931.3	28.00	948.2	28.50	965.1	29.00	982.1	29.50	999.0	30.00	1015.9	30.50	1032.9	31.00	1049.8
27.51	931.6	28.01	948.5	28.51	965.5	29.01	982.4	29.51	999.3	30.01	1016.3	30.51	1033.2	31.01	1050.1
27.52	931.9	28.02	948.9	28.52	965.8	29.02	982.7	29.52	999.7	30.02	1016.6	30.52	1033.5	31.02	1050.5
27.53	932.3	28.03	949.2	28.53	966.1	29.03	983.1	29.53	1000.0	30.03	1016.9	30.53	1033.9	31.03	1050.8
27.54	932.6	28.04	949.5	28.54	966.5	29.04	983.4	29.54	1000.3	30.04	1017.3	30.54	1034.2	31.04	1051.1
27.55	933.0	28.05	949.9	28.55	966.8	29.05	983.7	29.55	1000.7	30.05	1017.6	30.55	1034.5	31.05	1051.5
27.56	933.3	28.06	950.2	28.56	967.2	29.06	984.1	29.56	1001.0	30.06	1018.0	30.56	1034.9	31.06	1051.8
27.57	933.6	28.07	950.6	28.57	967.5	29.07	984.4	29.57	1001.4	30.07	1018.3	30.57	1035.2	31.07	1052.2
27.58	934.0	28.08	950.9	28.58	967.8	29.08	984.8	29.58	1001.7	30.08	1018.6	30.58	1035.6	31.08	1052.5
27.59	934.3	28.09	951.2	28.59	968.2	29.09	985.1	29.59	1002.0	30.09	1019.0	30.59	1035.9	31.09	1052.8
27.60	934.6	28.10	951.6	28.60	968.5	29.10	985.4	29.60	1002.4	30.10	1019.3	30.60	1036.2	31.10	1053.2
27.61	935.0	28.11	951.9	28.61	968.8	29.11	985.8	29.61	1002.7	30.11	1019.6	30.61	1036.6	31.11	1053.5
27.62	935.3	28.12	952.3	28.62	969.2	29.12	986.1	29.62	1003.1	30.12	1020.0	30.62	1036.9	31.12	1053.8
27.63	935.7	28.13	952.6	28.63	969.5	29.13	986.5	29.63	1003.4	30.13	1020.3	30.63	1037.3	31.13	1054.2
27.64	936.0	28.14	952.9	28.64	969.9	29.14	986.8	29.64	1003.7	30.14	1020.7	30.64	1037.6	31.14	1054.5
27.65	936.3	28.15	953.3	28.65	970.2	29.15	987.1	29.65	1004.1	30.15	1021.0	30.65	1037.9	31.15	1054.9
27.66	936.7	28.16	953.6	28.66	970.5	29.16	987.5	29.66	1004.4	30.16	1021.3	30.66	1038.3	31.16	1055.2
27.67	937.0	28.17	953.9	28.67	970.9	29.17	987.8	29.67	1004.7	30.17	1021.7	30.67	1038.6	31.17	1055.5
27.68	937.4	28.18	954.3	28.68	971.2	29.18	988.2	29.68	1005.1	30.18	1022.0	30.68	1038.9	31.18	1055.9
27.69	937.7	28.19	954.6	28.69	971.6	29.19	988.5	29.69	1005.4	30.19	1022.4	30.69	1039.3	31.19	1056.2
27.70	938.0	28.20	955.0	28.70	971.9	29.20	988.8	29.70	1005.8	30.20	1022.7	30.70	1039.6	31.20	1056.6
27.71	938.4	28.21	955.3	28.71	972.2	29.21	989.2	29.71	1006.1	30.21	1023.0	30.71	1040.0	31.21	1056.9
27.72	938.7	28.22	955.6	28.72	972.6	29.22	989.5	29.72	1006.4	30.22	1023.4	30.72	1040.3	31.22	1057.2
27.73	939.0	28.23	956.0	28.73	972.9	29.23	989.8	29.73	1006.8	30.23	1023.7	30.73	1040.6	31.23	1057.6
27.74	939.4	28.24	956.3	28.74	973.2	29.24	990.2	29.74	1007.1	30.24	1024.0	30.74	1041.0	31.24	1057.9
27.75	939.7	28.25	956.7	28.75	973.6	29.25	990.5	29.75	1007.5	30.25	1024.4	30.75	1041.3	31.25	1058.2
27.76	940.1	28.26	957.0	28.76	973.9	29.26	990.9	29.76	1007.8	30.26	1024.7	30.76	1041.7	31.26	1058.6
27.77	940.4	28.27	957.3	28.77	974.3	29.27	991.2	29.77	1008.1	30.27	1025.1	30.77	1042.0	31.27	1058.9
27.78	940.7	28.28	957.7	28.78	974.6	29.28	991.5	29.78	1008.5	30.28	1025.4	30.78	1042.3	31.28	1059.3
27.79	941.1	28.29	958.0	28.79	974.9	29.29	991.9	29.79	1008.8	30.29	1025.7	30.79	1042.7	31.29	1059.6
27.80	941.4	28.30	958.3	28.80	975.3	29.30	992.2	29.80	1009.1	30.30	1026.1	30.80	1043.0	31.30	1059.9
27.81	941.8	28.31	958.7	28.81	975.6	29.31	992.6	29.81	1009.5	30.31	1026.4	30.81	1043.3	31.31	1060.3
27.82	942.1	28.32	959.0	28.82	976.0	29.32	992.9	29.82	1009.8	30.32	1026.8	30.82	1043.7	31.32	1060.6
27.83	942.4	28.33	959.4	28.83	976.3	29.33	993.2	29.83	1010.2	30.33	1027.1	30.83	1044.0	31.33	1061.0
27.84	942.8	28.34	959.7	28.84	976.6	29.34	993.6	29.84	1010.5	30.34	1027.4	30.84	1044.4	31.34	1061.3
27.85	943.1	28.35	960.0	28.85	977.0	29.35	993.9	29.85	1010.8	30.35	1027.8	30.85	1044.7	31.35	1061.6
27.86	943.4	28.36	960.4	28.86	977.3	29.36	994.2	29.86	1011.2	30.36	1028.1	30.86	1045.0	31.36	1062.0
27.87	943.8	28.37	960.7	28.87	977.7	29.37	994.6	29.87	1011.5	30.37	1028.4	30.87	1045.4	31.37	1062.3
27.88	944.1	28.38	961.1	28.88	978.0	29.38	994.9	29.88	1011.9	30.38	1028.8	30.88	1045.7	31.38	1062.7
27.89	944.5	28.39	961.4	28.89	978.3	29.39	995.3	29.89	1012.2	30.39	1029.1	30.89	1046.1	31.39	1063.0
27.90	944.8	28.40	961.7	28.90	978.7	29.40	995.6	29.90	1012.5	30.40	1029.5	30.90	1046.4	31.40	1063.3
27.91	945.1	28.41	962.1	28.91	979.0	29.41	995.9	29.91	1012.9	30.41	1029.8	30.91	1046.7	31.41	1063.7
27.92	945.5	28.42	962.4	28.92	979.3	29.42	996.3	29.92	1013.2	30.42	1030.1	30.92	1047.1	31.42	1064.0
27.93	945.8	28.43	962.8	28.93	979.7	29.43	996.6	29.93	1013.5	30.43	1030.5	30.93	1047.4	31.43	1064.3
27.94	946.2	28.44	963.1	28.94	980.0	29.44	997.0	29.94	1013.9	30.44	1030.8	30.94	1047.8	31.44	1064.7
27.95	946.5	28.45	963.4	28.95	980.4	29.45	997.3	29.95	1014.2	30.45	1031.2	30.95	1048.1	31.45	1065.0
27.96	946.8	28.46	963.8	28.96	980.7	29.46	997.6	29.96	1014.6	30.46	1031.5	30.96	1048.4	31.46	1065.4
27.97	947.2	28.47	964.1	28.97	981.0	29.47	998.0	29.97	1014.9	30.47	1031.8	30.97	1048.8	31.47	1065.7
27.98	947.5	28.48	964.4	28.98	981.4	29.48	998.3	29.98	1015.2	30.48	1032.2	30.98	1049.1	31.48	1066.0
27.99	947.9	28.49	964.8	28.99	981.7	29.49	998.6	29.99	1015.6	30.49	1032.5	30.99	1049.5	31.49	1066.4

¹ Based on standard gravity of 980.665 cm./sec.²

CODE TABLE 9

SYMBOL C_L .—Clouds of types stratocumulus, stratus, cumulus, and cumulonimbus

Code figures	Technical language specifications	Plain language specifications
0	No C_L clouds.	No cumulus, cumulonimbus, stratocumulus or stratus.
1	Cumulus humilis, cumulus fractus other than of bad weather, or both.	Ragged cumulus other than those of bad weather or cumulus with little vertical development and seemingly flattened or both.
2	Cumulus mediocris or congestus, with or without cumulus of species fractus or humilis, or stratocumulus; all having their bases at the same level.	Cumulus of moderate or strong vertical development generally with protuberances in the form of domes or towers, either accompanied or not by other cumulus or by stratocumulus; all having their bases at the same level.
3	Cumulonimbus calvus, with or without cumulus, stratocumulus or stratus.	Cumulonimbus the summits of which, at least partially, lack sharp outlines, but are neither clearly fibrous, neither cirriform nor in the form of an anvil; cumulus, stratocumulus or stratus may be present.
4	Stratocumulus cumulogenitus.	Stratocumulus formed by the spreading out of cumulus; cumulus may also be present.
5	Stratocumulus other than cumulogenitus.	Stratocumulus not proceeding from the spreading out of cumulus.
6	Stratus nebulosus, stratus fractus other than of bad weather, or both.	Stratus in a more or less continuous sheet or layer, or in ragged shreds or both, but not fractostratus of bad weather.
7	Stratus fractus or cumulus fractus of bad weather (pannus) or both, usually below altostratus or nimbostratus.	Fractostratus of bad weather or fractocumulus of bad weather or both; usually below altostratus or nimbostratus. (By "bad weather" is meant the conditions which generally exist before, during or after precipitation.)
8	Cumulus and stratocumulus, other than cumulogenitus, with bases at different levels.	Cumulus and stratocumulus, other than those formed from the spreading out of cumulus; the base of cumulus is at a different level than that of the stratocumulus.
9	Cumulonimbus capillatus (often with an anvil), with or without cumulus, stratocumulus, stratus or pannus.	Cumulonimbus, the upper part of which is clearly fibrous (cirriform) often in the form of an anvil; either accompanied, or not, by cumulus, stratocumulus, stratus, or fractocumulus or fractostratus of bad weather.
X	Clouds C_L not visible owing to darkness, fog, blowing dust or sand, or other similar phenomena.	No cumulus, cumulonimbus, stratocumulus or stratus visible owing to darkness, fog, blowing dust or sand, or other such phenomena.

CODE TABLE 10¹

SYMBOL h.—Height of base of lowest cloud (C_L or C_M) above sea^{2 3}

Code figure	Height in feet	Approximate height in meters
0 ²	0- 149.	0- 49.
1	150- 299.	50- 99.
2	300- 599.	100- 199.
3	600- 999.	200- 299.
4	1000-1999.	300- 599.
5	2000-3499.	600- 999.
6	3500-4999.	1000-1499.
7	5000-6499.	1500-1999.
8	6500-7999.	2000-2500.
9	8000 or higher or no clouds.	2500 or higher or no clouds.

NOTES

- ¹ For the purpose of the ship code used in this manual (FM 21A), symbol "h" from WMO Code Table 43 has the meaning shown in this table.
² When the sky is obscured by rain, snow, fog, smoke, or other phenomena so that cloud cannot be observed, "h" is coded as 0 and "N_h" as 9; otherwise, disregard the obscuring phenomena and code h as observed—e. g., use code figure 9 if no clouds are observable even though half the sky is hidden by fog.
³ If the height of the cloud base cannot be reported owing to darkness or any reason not covered by Note 2 an X is reported for "h".

CODE TABLE 11

SYMBOL C_M .—Clouds of types *altocumulus*, *altostratus*, and *nimbostratus*

Code figures	Technical language specifications	Plain language specifications
0	No C_M clouds.....	No <i>altocumulus</i> , <i>altostratus</i> or <i>nimbostratus</i> .
1	<i>Altostratus translucidus</i>	<i>Altostratus</i> , the greater part of which is semitransparent; through this part the sun or moon may be weakly visible as through ground glass.
2	<i>Altostratus opacus</i> or <i>nimbostratus</i>	<i>Altostratus</i> , the greater part of which is sufficiently dense to hide the sun (or moon), or <i>nimbostratus</i> .
3	<i>Altostratus translucidus</i> or <i>perlucidus</i> at a single level.	<i>Altostratus</i> , the greater part of which is semitransparent; the various elements of the cloud change but slowly and are all at a single level.
4	Patches of <i>altocumulus translucidus</i> or <i>perlucidus</i> (often lenticular), continuously changing and at one or more levels.	Patches of semitransparent <i>altocumulus</i> (often in the form of almonds or fishes) which are at one or more levels; the elements of this cloud are continuously changing in aspect.
5	<i>Altostratus translucidus</i> or <i>perlucidus</i> in bands, or a layer of <i>altocumulus</i> progressively invading the sky; these <i>altocumulus</i> clouds generally thicken as a whole. The layer may be <i>altocumulus opacus</i> or <i>duplicatus</i> .	Semitransparent <i>altocumulus</i> in bands or <i>altocumulus</i> in one more or less continuous layer progressively invading the sky; these <i>altocumulus</i> clouds generally thicken as a whole. The layer may be opaque or double with a second sheet.
6	<i>Altostratus cumulogenitus</i>	<i>Altostratus</i> formed by the spreading out of <i>cumulus</i> .
7	<i>Altostratus duplicatus</i> or <i>opacus</i> , not progressively invading the sky, or <i>altocumulus</i> with <i>altostratus</i> or <i>nimbostratus</i> or both.	Any one of the following cases: (a) <i>Altostratus</i> in two or more layers usually opaque in places and not progressively invading the sky. (b) Opaque layer of <i>altocumulus</i> not progressively invading the sky. (c) <i>Altostratus</i> coexisting with <i>altostratus</i> or <i>nimbostratus</i> or both.
8	<i>Altostratus castellatus</i> or <i>floccus</i>	<i>Altostratus</i> with sprouts in the form of small towers or battlements, or <i>altocumulus</i> having the aspect of <i>cumuliform</i> tufts.
9	<i>Altostratus</i> of a chaotic sky, generally at several levels; <i>cirrus spissatus</i> usually coexists.	<i>Altostratus</i> , generally at several layers in a chaotic sky; dense <i>cirrus</i> is usually present.
X	Clouds C_M not visible owing to darkness, fog, blowing dust or sand, or other similar phenomena, or because of a continuous layer of lower clouds.	No <i>altocumulus</i> , <i>altostratus</i> or <i>nimbostratus</i> visible owing to darkness, fog, blowing dust or sand, or other such phenomena, or because of the presence of a continuous layer of lower clouds.

CODE TABLE 12

SYMBOL C_H .—Clouds of types cirrus, cirrostratus, and cirrocumulus

Code figures	Technical language specifications	Plain language specifications
0	No C_H clouds.....	No cirrus, cirrostratus or cirrocumulus.
1	Cirrus fibratus, sometimes uncinus, not progressively invading the sky.	Cirrus in the form of filaments, strands or hooks, not progressively invading the sky (often called "mares tails").
2	Cirrus spissatus, in patches or entangled sheaves, which usually do not increase and sometimes seem to be the remains of the upper part of a cumulonimbus; or cirrus castellatus or floccus.	Dense cirrus in patches or entangled sheaves which usually do not increase and sometimes seem to be the remains of the upper parts of cumulonimbus; or cirrus with sproutings in the form of towers or battlements or having the aspect of cumuliform tufts.
3	Cirrus spissatus cumulonimbogenitus; either the remains of cumulonimbus, or parts of distant cumulonimbus, the cumuliform portions of which cannot be seen.	Cirrus, often in the form of an anvil; either the remains of the upper parts of cumulonimbus, or parts of distant cumulonimbus, the cumuliform portions of which cannot be seen.
4	Cirrus uncinus or fibratus, or both, progressively invading the sky; they generally thicken as a whole.	Cirrus in the form of hooks or filaments or both, progressively invading the sky; they generally become denser as a whole.
5	Cirrus, often in bands, and cirrostratus, or cirrostratus alone, progressively invading the sky; they generally thicken as a whole, but the continuous veil does not reach 45° above the horizon.	Cirrus, often in bands converging towards 1 or 2 points of the horizon, and cirrostratus, or cirrostratus only; in either case they are progressively invading the sky, and generally growing denser as a whole, but the continuous veil does not reach 45° above the horizon.
6	Cirrus, often in bands, and cirrostratus, or cirrostratus alone, progressively invading the sky; they generally thicken as a whole, but the continuous veil exceeds 45° above the horizon, without the sky being totally covered.	Cirrus, often in bands converging towards 1 or 2 points of the horizon, and cirrostratus, or cirrostratus only; in either case they are progressively invading the sky, and generally growing denser as a whole, but the continuous veil exceeds 45° above the horizon, without the sky being completely covered.
7	Cirrostratus covering the whole sky.....	Veil of cirrostratus completely covering the sky.
8	Cirrostratus not progressively invading the sky, and not entirely covering it.	Cirrostratus not progressively invading the sky, and not completely covering it.
9	Cirrocumulus alone, or cirrocumulus predominant among the cirriform clouds.	Cirrocumulus alone, or cirrocumulus accompanied by cirrus or cirrostratus or both, but cirrocumulus is the predominant cirriform cloud.
X	Clouds C_H not visible owing to darkness, fog, blowing dust or sand or other similar phenomena, or because of a continuous layer of lower clouds.	No cirrus, cirrostratus or cirrocumulus visible owing to darkness, fog, blowing dust or sand, or other such phenomena, or because of the presence of a continuous layer of lower clouds.

CODE TABLE 13

SYMBOL D_s.—Ship's course (true) made good in 3 hours preceding the time of observation

Code figure	True course	Code figures	True course
0	Ship hove to.	5	SW.
1	NE.	6	W.
2	E.	7	NW.
3	SE.	8	N.
4	S.	9	No information.

CODE TABLE 14

SYMBOL V_s.—Ship's average speed made good during 3 hours preceding the time of observation

Code figure	Speed	Code figures	Speed
0	Ship stopped.	5	13 to 15 knots.
1	1 to 3 knots.	6	16 to 18 knots.
2	4 to 6 knots.	7	19 to 21 knots.
3	7 to 9 knots.	8	22 to 24 knots.
4	10 to 12 knots.	9	More than 24 knots.

CODE TABLE 15

SYMBOL a.—Barometer change characteristics in the last 3 hours

Trace	Code figures	Description
	0	Rising, then falling. Barometer the same or higher than 3 hours ago.
	1	Rising, then steady; or rising then rising more slowly.
	2	Rising, steadily or unsteadily.
	3	Falling or steady, then rising; or rising then rising more quickly.
	4	Steady. Barometer the same as 3 hours ago.
	5	Falling, then rising. Barometer the same or lower than 3 hours ago.
	6	Falling, then steady; or falling then falling more slowly.
	7	Falling, steadily or unsteadily.
	8	Steady or rising, then falling; or falling, then falling more quickly.

} Barometer now higher than 3 hours ago.

} Barometer now lower than 3 hours ago.

MANUAL OF MARINE METEOROLOGICAL OBSERVATIONS

CODE TABLE 16

SYMBOL pp.—Amount of barometric change in the last 3 hours

[Coded in units of $\frac{1}{10}$ of a millibar. For example, 0.025 inch is coded as 09; 1.2 millibars as 12]

Amount of rise or fall							
Inch	Milli-bars	Inch	Milli-bars	Inch	Milli-bars	Inch	Milli-bars
0. 005	0. 2	0. 155	5. 2	0. 305	10. 3	0. 455	15. 4
. 010	0. 3	. 160	5. 4	. 310	10. 5	. 460	15. 6
. 015	0. 5	. 165	5. 6	. 315	10. 7	. 465	15. 7
. 020	0. 7	. 170	5. 8	. 320	10. 8	. 470	15. 9
. 025	0. 8	. 175	5. 9	. 325	11. 0	. 475	16. 1
. 030	1. 0	. 180	6. 1	. 330	11. 2	. 480	16. 3
. 035	1. 2	. 185	6. 3	. 335	11. 3	. 485	16. 4
. 040	1. 4	. 190	6. 4	. 340	11. 5	. 490	16. 6
. 045	1. 5	. 195	6. 6	. 345	11. 7	. 495	16. 8
. 050	1. 7	. 200	6. 8	. 350	11. 9	. 500	16. 9
. 055	1. 9	. 205	6. 9	. 355	12. 0	. 505	17. 1
. 060	2. 0	. 210	7. 1	. 360	12. 2	. 510	17. 3
. 065	2. 2	. 215	7. 3	. 365	12. 4	. 515	17. 4
. 070	2. 4	. 220	7. 5	. 370	12. 5	. 520	17. 6
. 075	2. 5	. 225	7. 6	. 375	12. 7	. 525	17. 8
. 080	2. 7	. 230	7. 8	. 380	12. 9	. 530	17. 9
. 085	2. 9	. 235	8. 0	. 385	13. 0	. 535	18. 1
. 090	3. 0	. 240	8. 1	. 390	13. 2	. 540	18. 3
. 095	3. 2	. 245	8. 3	. 395	13. 4	. 545	18. 5
. 100	3. 4	. 250	8. 5	. 400	13. 5	. 550	18. 6
. 105	3. 6	. 255	8. 6	. 405	13. 7	. 555	18. 8
. 110	3. 7	. 260	8. 8	. 410	13. 9	. 560	19. 0
. 115	3. 9	. 265	9. 0	. 415	14. 1	. 565	19. 1
. 120	4. 1	. 270	9. 1	. 420	14. 2	. 570	19. 3
. 125	4. 2	. 275	9. 3	. 425	14. 4	. 575	19. 5
. 130	4. 4	. 280	9. 5	. 430	14. 6	. 580	19. 6
. 135	4. 6	. 285	9. 7	. 435	14. 7	. 585	19. 8
. 140	4. 7	. 290	9. 8	. 440	14. 9	. 590	20. 0
. 145	4. 9	. 295	10. 0	. 445	15. 1	. 595	20. 1
. 150	5. 1	. 300	10. 2	. 450	15. 2	. 600	20. 3

TABLES

CODE TABLE 17

SYMBOL P_w .—*Period of waves*

Code figure	Period
2	5 seconds or less.
3	5 to 7 seconds.
4	7 to 9 seconds.
5	9 to 11 seconds.
6	11 to 13 seconds.
7	13 to 15 seconds.
8	15 to 17 seconds.
9	17 to 19 seconds.
0	19 to 21 seconds.
1	Over 21 seconds.
x	Calm, or period indeterminate.

NOTE.—If the exact number of seconds for the period of the waves corresponds to two code figures, the lower code figure is reported.

CODE TABLE 18

SYMBOL H_w .—*Height of waves*

Code figure	Height
0	Less than 1 foot ($\frac{1}{4}$ meter).
1	1½ feet ($\frac{1}{2}$ meter).
2	3 feet (1 meter).
3	5 feet (1½ meters).
4	6½ feet (2 meters).
5	8 feet (2½ meters).
6	9½ feet (3 meters).
7	11 feet (3½ meters).
8	13 feet (4 meters).
9	14 feet (4½ meters).
x	Height impossible to determine. (When 50 is added to d. d., the height of waves is as follows):
0	16 feet (5 meters).
1	17½ feet (5½ meters).
2	19 feet (6 meters).
3	21 feet (6½ meters).
4	22½ feet (7 meters).
5	24 feet (7½ meters).
6	25½ feet (8 meters).
7	27 feet (8½ meters).
8	29 feet (9 meters).
9	30½ feet (9½ meters).
x	Height impossible to determine.

NOTES

- Each code figure except "zero" covers a range of $\frac{1}{2}$ meter; e. g., code figure 1 = $\frac{1}{4}$ meter to $\frac{3}{4}$ meter, code figure 2 = $\frac{3}{4}$ meter to 1½ meters.
- If the wave height is exactly between the heights corresponding to two code figures, the lower code figure is reported.
- For wave heights greater than 31 feet (9½ meters), the code figure for 30½ feet (9½ meters) is reported followed by the word "WAVES" and the actual height of the waves in feet or meters; e. g., "WAVES 37."

CODE TABLE 19

SYMBOL *c*₂.—*Description of kind of ice*

Code figure	Description
0	None or "ice-blink." ¹
1	New ice.
2	Fast-ice.
3	Pack ice/drift ice.
4	Packed (compact) slush or sludge.
5	Shore lead.
6	Heavy fast-ice.
7	Heavy pack ice/drift ice.
8	Hummocked-ice.
9	Icebergs. ²

¹ When ice-blink is recorded, its bearing (symbol *D*₁) should also be recorded and reported.

² Icebergs can also be reported in plain language.

CODE TABLE 20

SYMBOL *K*.—*Effect of ice on navigation*

Code figures	Description
0	Navigation unobstructed.
1	Navigation unobstructed for steamers; difficult for sailing ships.
2	Navigation difficult for low-powered steamers; closed to sailing ships.
3	Navigation possible only for powerful steamers.
4	Navigation possible only for steamers constructed to withstand ice pressure.
5	Navigation possible with the assistance of icebreakers.
6	Channel open in the solid ice.
7	Navigation temporarily closed.
8	Navigation closed.
9	Navigation conditions unknown (e. g., owing to bad weather).

CODE TABLE 21

SYMBOL *D*₁.—*Bearing of ice-limit*

Code figure	Description
0	No ice limit can be stated.
1	Ice-limit toward NE.
2	Ice-limit toward E.
3	Ice-limit toward SE.
4	Ice-limit toward S.
5	Ice-limit toward SW.
6	Ice-limit toward W.
7	Ice-limit toward NW.
8	Ice-limit toward N.
9	Ice-limit in several directions.

NOTE.—If more than one ice-limit can be stated, the nearest or most important is reported.

TABLES

CODE TABLE 22

SYMBOL r.—Distance to ice-limit from reporting ship

Code figure	Distance
0	0 to 1 mile.
1	1 to 2 miles.
2	2 to 4 miles.
3	4 to 6 miles.
4	6 to 8 miles.
5	8 to 12 miles.
6	12 to 16 miles.
7	16 to 20 miles.
8	More than 20 miles.
9	Unspecified or no observations.

NOTE.—If the exact bounding distance for the ice-limit corresponds to two code figures, the lower code figure is reported.

CODE TABLE 23

SYMBOL e.—Orientation of ice-limit

Code figure	Orientation of ice-limit
0	Orientation of ice-limit impossible to estimate—ship <i>outside</i> the ice.
1	Ice-edge lying in a direction NE to SW with ice situated to the NW.
2	Ice-edge lying in a direction E to W with ice situated to the northward.
3	Ice-edge lying in a direction SE to NW with ice situated to the NE.
4	Ice-edge lying in a direction S to N with ice situated to the eastward.
5	Ice-edge lying in a direction SW to NE with ice situated to the SE.
6	Ice-edge lying in a direction W to E with ice situated to the southward.
7	Ice-edge lying in a direction NW to SE with ice situated to the SW.
8	Ice-edge lying in a direction N to S with ice situated to the westward.
9	Orientation of ice-limit impossible to estimate—ship <i>inside</i> the ice.

MANUAL OF MARINE METEOROLOGICAL OBSERVATIONS

TABLE 24.—Celsius (centigrade) to Fahrenheit temperatures

°C.	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
+45	+113.0	+113.2	+113.4	+113.5	+113.7	+113.9	+114.1	+114.3	+114.4	+114.6
44	111.2	111.4	111.6	111.7	111.9	112.1	112.3	112.5	112.6	112.8
43	109.4	109.6	109.8	109.9	110.1	110.3	110.5	110.7	110.8	111.0
42	107.6	107.8	108.0	108.1	108.3	108.5	108.7	108.9	109.0	109.2
41	105.8	106.0	106.2	106.3	106.5	106.7	106.9	107.1	107.2	107.4
+40	+104.0	+104.2	+104.4	+104.5	+104.7	+104.9	+105.1	+105.3	+105.4	+105.6
39	102.2	102.4	102.6	102.7	102.9	103.1	103.3	103.5	103.6	103.8
38	100.4	100.6	100.8	100.9	101.1	101.3	101.5	101.7	101.8	102.0
37	98.6	98.8	99.0	99.1	99.3	99.5	99.7	99.9	100.0	100.2
36	96.8	97.0	97.2	97.3	97.5	97.7	97.9	98.1	98.2	98.4
+35	+95.0	+95.2	+95.4	+95.5	+95.7	+95.9	+96.1	+96.3	+96.4	+96.6
34	93.2	93.4	93.6	93.7	93.9	94.1	94.3	94.5	94.6	94.8
33	91.4	91.6	91.8	91.9	92.1	92.3	92.5	92.7	92.8	93.0
32	89.6	89.8	90.0	90.1	90.3	90.5	90.7	90.9	91.0	91.2
31	87.8	88.0	88.2	88.3	88.5	88.7	88.9	89.1	89.2	89.4
+30	+86.0	+86.2	+86.4	+86.5	+86.7	+86.9	+87.1	+87.3	+87.4	+87.6
29	84.2	84.4	84.6	84.7	84.9	85.1	85.3	85.5	85.6	85.8
28	82.4	82.6	82.8	82.9	83.1	83.3	83.5	83.7	83.8	84.0
27	80.6	80.8	81.0	81.1	81.3	81.5	81.7	81.9	82.0	82.2
26	78.8	79.0	79.2	79.3	79.5	79.7	79.9	80.1	80.2	80.4
+25	+77.0	+77.2	+77.4	+77.5	+77.7	+77.9	+78.1	+78.3	+78.4	+78.6
24	75.2	75.4	75.6	75.7	75.9	76.1	76.3	76.5	76.6	76.8
23	73.4	73.6	73.8	73.9	74.1	74.3	74.5	74.7	74.8	75.0
22	71.6	71.8	72.0	72.1	72.3	72.5	72.7	72.9	73.0	73.2
21	69.8	70.0	70.2	70.3	70.5	70.7	70.9	71.1	71.2	71.4
+20	+68.0	+68.2	+68.4	+68.5	+68.7	+68.9	+69.1	+69.3	+69.4	+69.6
19	66.2	66.4	66.6	66.7	66.9	67.1	67.3	67.5	67.6	67.8
18	64.4	64.6	64.8	64.9	65.1	65.3	65.5	65.7	65.8	66.0
17	62.6	62.8	63.0	63.1	63.3	63.5	63.7	63.9	64.0	64.2
16	60.8	61.0	61.2	61.3	61.5	61.7	61.9	62.1	62.2	62.4
+15	+59.0	+59.2	+59.4	+59.5	+59.7	+59.9	+60.1	+60.3	+60.4	+60.6
14	57.2	57.4	57.6	57.7	57.9	58.1	58.3	58.5	58.6	58.8
13	55.4	55.6	55.8	55.9	56.1	56.3	56.5	56.7	56.8	57.0
12	53.6	53.8	54.0	54.1	54.3	54.5	54.7	54.9	55.0	55.2
11	51.8	52.0	52.2	52.3	52.5	52.7	52.9	53.1	53.2	53.4
+10	+50.0	+50.2	+50.4	+50.5	+50.7	+50.9	+51.1	+51.3	+51.4	+51.6
9	48.2	48.4	48.6	48.7	48.9	49.1	49.3	49.5	49.6	49.8
8	46.4	46.6	46.8	46.9	47.1	47.3	47.5	47.7	47.8	48.0
7	44.6	44.8	45.0	45.1	45.3	45.5	45.7	45.9	46.0	46.2
6	42.8	43.0	43.2	43.3	43.5	43.7	43.9	44.1	44.2	44.4
+5	+41.0	+41.2	+41.4	+41.5	+41.7	+41.9	+42.1	+42.3	+42.4	+42.6
4	39.2	39.4	39.6	39.7	39.9	40.1	40.3	40.5	40.6	40.8
3	37.4	37.6	37.8	37.9	38.1	38.3	38.5	38.7	38.8	39.0
2	35.6	35.8	36.0	36.1	36.3	36.5	36.7	36.9	37.0	37.2
1	33.8	34.0	34.2	34.3	34.5	34.7	34.9	35.1	35.2	35.4
0	32.0	32.2	32.4	32.5	32.7	32.9	33.1	33.3	33.4	33.6

TABLE 24.—Celsius (centigrade) to Fahrenheit temperatures—Continued

°C.	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
	°F.									
-0	+32.0	+31.8	+31.6	+31.5	+31.3	+31.1	+30.9	+30.7	+30.6	+30.4
1	30.2	30.0	29.8	29.7	29.5	29.3	29.1	28.9	28.8	28.6
2	28.4	28.2	28.0	27.9	27.7	27.5	27.3	27.1	27.0	26.8
3	26.6	26.4	26.2	26.1	25.9	25.7	25.5	25.3	25.2	25.0
4	24.8	24.6	24.4	24.3	24.1	23.9	23.7	23.5	23.4	23.2
-5	+23.0	+22.8	+22.6	+22.5	+22.3	+22.1	+21.9	+21.7	+21.6	+21.4
6	21.2	21.0	20.8	20.7	20.5	20.3	20.1	19.9	19.8	19.6
7	19.4	19.2	19.0	18.9	18.7	18.5	18.3	18.1	18.0	17.8
8	17.6	17.4	17.2	17.1	16.9	16.7	16.5	16.3	16.2	16.0
9	15.8	15.6	15.4	15.3	15.1	14.9	14.7	14.5	14.4	14.2
-10	+14.0	+13.8	+13.6	+13.5	+13.3	+13.1	+12.9	+12.7	+12.6	+12.4
11	12.2	12.0	11.8	11.7	11.5	11.3	11.1	10.9	10.8	10.6
12	10.4	10.2	10.0	9.9	9.7	9.5	9.3	9.1	9.0	8.8
13	8.6	8.4	8.2	8.1	7.9	7.7	7.5	7.3	7.2	7.0
14	6.8	6.6	6.4	6.3	6.1	5.9	5.7	5.5	5.4	5.2
-15	+5.0	+4.8	+4.6	+4.5	+4.3	+4.1	+3.9	+3.7	+3.6	+3.4
16	+3.2	+3.0	+2.8	+2.7	+2.5	+2.3	+2.1	+1.9	+1.8	+1.6
17	+1.4	+1.2	+1.0	+0.9	+0.7	+0.5	+0.3	+0.1	-0.0	-0.2
18	-0.4	-0.6	-0.8	-0.9	-1.1	-1.3	-1.5	-1.7	-1.8	-2.0
19	-2.2	-2.4	-2.6	-2.7	-2.9	-3.1	-3.3	-3.5	-3.6	-3.8
-20	-4.0	-4.2	-4.4	-4.5	-4.7	-4.9	-5.1	-5.3	-5.4	-5.6
21	5.8	6.0	6.2	6.3	6.5	6.7	6.9	7.1	7.2	7.4
22	7.6	7.8	8.0	8.1	8.3	8.5	8.7	8.9	9.0	9.2
23	9.4	9.6	9.8	9.9	10.1	10.3	10.5	10.7	10.8	11.0
24	11.2	11.4	11.6	11.7	11.9	12.1	12.3	12.5	12.6	12.8
-25	-13.0	-13.2	-13.4	-13.5	-13.7	-13.9	-14.1	-14.3	-14.4	-14.6
26	14.8	15.0	15.2	15.3	15.5	15.7	15.9	16.1	16.2	16.4
27	16.6	16.8	17.0	17.1	17.3	17.5	17.7	17.9	18.0	18.2
28	18.4	18.6	18.8	18.9	19.1	19.3	19.5	19.7	19.8	20.0
29	20.2	20.4	20.6	20.7	20.9	21.1	21.3	21.5	21.6	21.8
-30	-22.0	-22.2	-22.4	-22.5	-22.7	-22.9	-23.1	-23.3	-23.4	-23.6
31	23.8	24.0	24.2	24.3	24.5	24.7	24.9	25.1	25.2	25.4
32	25.6	25.8	26.0	26.1	26.3	26.5	26.7	26.9	27.0	27.2
33	27.4	27.6	27.8	27.9	28.1	28.3	28.5	28.7	28.8	29.0
34	29.2	29.4	29.6	29.7	29.9	30.1	30.3	30.5	30.6	30.8
-35	-31.0	-31.2	-31.4	-31.5	-31.7	-31.9	-32.1	-32.3	-32.4	-32.6
36	32.8	33.0	33.2	33.3	33.5	33.7	33.9	34.1	34.2	34.4
37	34.6	34.8	35.0	35.1	35.3	35.5	35.7	35.9	36.0	36.2
38	36.4	36.6	36.8	36.9	37.1	37.3	37.5	37.7	37.8	38.0
39	38.2	38.4	38.6	38.7	38.9	39.1	39.3	39.5	39.6	39.8
-40	-40.0	-40.2	-40.4	-40.5	-40.7	-40.9	-41.1	-41.3	-41.4	-41.6
41	41.8	42.0	42.2	42.3	42.5	42.7	42.9	43.1	43.2	43.4
42	43.6	43.8	44.0	44.1	44.3	44.5	44.7	44.9	45.0	45.2
43	45.4	45.6	45.8	45.9	46.1	46.3	46.5	46.7	46.8	47.0
44	47.2	47.4	47.6	47.7	47.9	48.1	48.3	48.5	48.6	48.8

TABLE 25.—Temperature of the dew point in degrees Fahrenheit

[Tabular values are dew points with respect to water]

Wet-bulb temperature (° F.)	Depression of the wet-bulb thermometer (dry-bulb minus wet-bulb)																				
	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
-20.0	-27	-29	-31	-33	-35	-38	-41	-45	-50	-58	-70										
-19.5	-26	-28	-30	-32	-35	-37	-40	-44	-49	-55	-64	-92									
-19.0	-26	-28	-29	-31	-34	-36	-39	-43	-47	-52	-60	-76									
-18.5	-25	-27	-29	-31	-33	-35	-38	-41	-45	-50	-57	-69									
-18.0	-25	-26	-28	-30	-32	-34	-37	-40	-44	-48	-54	-64	-87								
-17.5	-24	-26	-27	-29	-31	-33	-36	-39	-42	-46	-52	-59	-74								
-17.0	-24	-25	-27	-28	-30	-33	-35	-38	-41	-45	-49	-56	-67								
-16.5	-23	-24	-26	-28	-30	-32	-34	-36	-39	-43	-47	-53	-62	-80							
-16.0	-22	-24	-25	-27	-29	-31	-33	-35	-38	-42	-46	-51	-58	-70							
-15.5	-22	-23	-25	-26	-28	-30	-32	-34	-37	-40	-44	-48	-54	-64	-88						
-15.0	-21	-23	-24	-26	-27	-29	-31	-33	-36	-39	-42	-46	-52	-59	-73						
-14.5	-21	-22	-23	-25	-26	-28	-30	-32	-35	-37	-40	-44	-49	-55	-65						
-14.0	-20	-21	-23	-24	-26	-27	-29	-31	-34	-36	-39	-42	-47	-52	-60	-76					
-13.5	-20	-21	-22	-23	-25	-27	-28	-30	-32	-35	-38	-41	-45	-49	-56	-67					
-13.0	-19	-20	-21	-23	-24	-26	-28	-29	-31	-34	-36	-39	-43	-47	-53	-61	-78				
-12.5	-18	-20	-21	-22	-24	-25	-27	-28	-30	-33	-35	-38	-41	-45	-50	-56	-67				
-12.0	-18	-19	-20	-21	-23	-24	-26	-28	-29	-31	-34	-36	-39	-43	-47	-53	-61	-78			
-11.5	-17	-18	-20	-21	-22	-24	-25	-27	-28	-30	-33	-35	-38	-41	-45	-50	-56	-67			
-11.0	-17	-18	-19	-20	-21	-23	-24	-26	-27	-29	-31	-34	-36	-39	-43	-47	-52	-61	-77		
-10.5	-16	-17	-18	-19	-21	-22	-23	-25	-27	-28	-30	-32	-35	-37	-41	-44	-49	-56	-66		
-10.0	-16	-17	-18	-19	-20	-21	-23	-24	-26	-27	-29	-31	-33	-36	-39	-42	-47	-52	-60	-75	
-9.5	-15	-16	-17	-18	-19	-21	-22	-23	-25	-26	-28	-30	-32	-34	-37	-40	-44	-49	-55	-65	-94
-9.0	-14	-15	-16	-17	-19	-20	-21	-22	-24	-25	-27	-29	-31	-33	-36	-38	-42	-46	-51	-58	-72
-8.5	-14	-15	-16	-17	-18	-19	-20	-22	-23	-24	-26	-28	-30	-32	-34	-37	-40	-43	-48	-54	-63
-8.0	-13	-14	-15	-16	-17	-18	-20	-21	-22	-24	-25	-27	-29	-30	-33	-35	-38	-41	-45	-50	-57
-7.5	-13	-14	-15	-16	-17	-18	-19	-20	-21	-23	-24	-26	-27	-29	-31	-33	-36	-39	-42	-47	-52
-7.0	-12	-13	-14	-15	-16	-17	-18	-19	-20	-22	-23	-25	-26	-28	-30	-32	-34	-37	-40	-44	-48
-6.5	-12	-13	-14	-15	-16	-17	-18	-20	-21	-22	-24	-25	-27	-29	-31	-33	-35	-38	-41	-45	-49
-6.0	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-21	-23	-24	-26	-27	-29	-31	-34	-36	-39	-43
-5.5	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-22	-23	-25	-26	-28	-30	-32	-34	-37	-40
-5.0	-10	-11	-12	-12	-13	-14	-15	-16	-17	-18	-20	-21	-22	-24	-25	-27	-29	-30	-33	-35	-38
-4.5	-9	-10	-11	-12	-13	-14	-14	-15	-16	-18	-19	-20	-21	-23	-24	-26	-27	-29	-31	-33	-36
-4.0	-9	-10	-11	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-22	-23	-24	-26	-28	-30	-32	-34
-3.5	-8	-9	-10	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-21	-22	-23	-25	-26	-28	-30	-32
-3.0	-8	-8	-9	-10	-11	-12	-12	-13	-14	-15	-16	-17	-18	-20	-21	-22	-24	-25	-27	-29	-31
-2.5	-7	-8	-8	-9	-10	-11	-11	-12	-13	-14	-15	-16	-17	-19	-20	-21	-22	-24	-25	-27	-29
-2.0	-7	-7	-8	-9	-9	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-21	-23	-24	-26	-27
-1.5	-6	-7	-7	-8	-9	-10	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-22	-23	-24	-26
-1.0	-5	-6	-7	-7	-8	-9	-10	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-22	-23	-25
-0.5	-5	-5	-6	-7	-7	-8	-9	-10	-11	-11	-12	-13	-14	-15	-16	-17	-18	-19	-21	-22	-23
0.0	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-11	-12	-13	-14	-15	-16	-17	-18	-19	-21	-22
+0.5	-4	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-11	-12	-13	-14	-15	-16	-17	-18	-20	-21
1.0	-3	-4	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-12	-12	-13	-14	-15	-16	-17	-18	-20
1.5	-3	-3	-4	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-12	-12	-13	-14	-15	-16	-17	-18
2.0	-2	-3	-3	-4	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-12	-12	-13	-14	-15	-16	-17
2.5	-1	-2	-3	-3	-4	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-12	-12	-13	-14	-15	-16
3.0	-1	-1	-2	-3	-3	-4	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-12	-12	-13	-14	-15
3.5	0	-1	-1	-2	-3	-3	-4	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-11	-12	-13	-14
4.0	0	0	-1	-1	-2	-2	-3	-4	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-11	-12	-13
4.5	1	0	0	-1	-1	-2	-2	-3	-4	-4	-5	-5	-6	-7	-7	-8	-9	-10	-10	-11	-12
5.0	1	1	0	0	-1	-1	-2	-2	-3	-3	-4	-5	-5	-6	-7	-7	-8	-9	-10	-10	-11
5.5	2	1	1	0	0	-1	-1	-2	-2	-3	-3	-4	-5	-5	-6	-7	-7	-8	-9	-9	-10
6.0	2	2	2	1	1	0	0	-1	-2	-2	-3	-3	-4	-4	-5	-6	-6	-7	-8	-9	-9
6.5	3	3	3	2	1	1	0	0	-1	-1	-2	-3	-3	-4	-4	-5	-6	-7	-8	-8	-9
7.0	4	3	3	2	2	1	1	0	0	-1	-1	-2	-2	-3	-4	-4	-5	-6	-7	-8	-8
7.5	4	4	3	3	2	2	1	1	0	0	-1	-1	-2	-2	-3	-4	-5	-6	-7	-8	-8
8.0	5	4	4	3	3	3	2	2	1	1	0	0	-1	-1	-2	-3	-4	-5	-6	-7	-8
8.5	5	5	4	4	4	3	3	3	2	2	1	1	0	0	-1	-1	-2	-3	-4	-5	-6
9.0	6	5	5	5	4	4	4	3	3	2	2	1	1	0	-1	-1	-2	-3	-4	-5	-6
9.5	6	6	6	5	5	4	4	3	3	3	2	2	1	1	0	0	-1	-2	-3	-4	-5

TABLE 25.—Temperature of the dew point in degrees Fahrenheit—Continued

[Tabular values are dew points with respect to water]

Wet-bulb temperature (° F.)	Depression of the wet-bulb thermometer (dry-bulb minus wet-bulb)																				
	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
10.0	7	7	6	6	5	5	5	4	4	3	3	2	2	1	1	0	0	-1	-1	-2	-2
10.5	8	7	7	6	6	6	5	5	4	4	3	3	3	2	2	1	1	0	0	-1	-2
11.0	8	8	7	7	7	6	6	5	5	5	4	4	3	3	2	2	1	1	0	0	-1
11.5	9	8	8	8	7	7	6	6	6	5	5	4	4	3	3	3	2	2	1	1	0
12.0	9	9	9	8	8	7	7	7	6	6	5	5	5	4	4	3	3	3	2	1	1
12.5	10	9	9	9	8	8	8	7	7	6	6	6	5	5	4	4	4	3	3	2	2
13.0	10	10	10	9	9	9	8	8	7	7	6	6	6	6	5	5	4	4	3	3	2
13.5	11	11	10	10	10	9	9	8	8	8	7	7	7	6	6	5	5	4	4	3	3
14.0	11	11	11	10	10	10	9	9	9	8	8	8	7	7	6	6	6	5	5	4	4
14.5	12	12	11	11	11	10	10	10	9	9	9	8	8	8	7	7	6	6	6	5	5
15.0	13	12	12	12	11	11	11	10	10	10	9	9	9	8	8	7	7	7	6	6	5
15.5	13	13	13	12	12	12	11	11	11	10	10	10	9	9	9	8	8	7	7	7	6
16.0	14	13	13	13	13	12	12	12	11	11	11	10	10	10	9	9	8	8	7	7	6
16.5	14	14	14	13	13	13	12	12	12	12	11	11	11	10	10	10	9	9	8	8	8
17.0	15	15	14	14	14	13	13	13	12	12	12	12	11	11	11	10	10	9	9	9	8
17.5	15	15	15	15	14	14	14	13	13	13	12	12	12	12	11	11	11	10	10	9	9
18.0	16	16	15	15	15	15	14	14	14	13	13	13	12	12	12	12	11	11	10	10	10
18.5	17	16	16	16	15	15	15	15	14	14	14	13	13	13	13	12	12	12	11	11	11
19.0	17	17	17	16	16	16	15	15	15	15	14	14	14	13	13	13	13	12	12	12	11
19.5	18	17	17	17	17	16	16	16	16	16	15	15	15	14	14	14	14	13	13	13	12
20.0	18	18	18	17	17	17	17	16	16	16	16	15	15	15	14	14	14	14	13	13	13

NOTE.—Table computed by means of Professor Ferrel's formula; $e=e'-0.000367P(t-t')(1+\frac{t'-32}{1571})$

TABLE 25.—Temperature of the dew point in degrees Fahrenheit—Continued

[Tabular values are dew points with respect to water]

Wet-bulb temperature (° F.)	Depression of the wet-bulb thermometer (dry-bulb minus wet bulb)																				
	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6	3.7	3.8	3.9	4.0	4.1	4.2
-10.0																					
-9.5																					
-9.0																					
-8.5	-84																				
-8.0	-68																				
-7.5	-60	-76																			
-7.0	-55	-64	-92																		
-6.5	-50	-57	-70																		
-6.0	-47	-52	-61	-77																	
-5.5	-44	-48	-55	-64	-91																
-5.0	-41	-45	-50	-57	-69																
-4.5	-39	-42	-46	-52	-59	-74															
-4.0	-37	-40	-43	-48	-53	-62	-82														
-3.5	-35	-37	-40	-44	-49	-55	-65	-99													
-3.0	-33	-35	-38	-41	-45	-50	-57	-69													
-2.5	-31	-33	-36	-38	-42	-46	-51	-59	-73												
-2.0	-29	-31	-34	-36	-39	-43	-47	-53	-61	-78											
-1.5	-28	-30	-32	-34	-37	-40	-43	-48	-54	-63	-84										
-1.0	-26	-28	-30	-32	-34	-37	-40	-44	-49	-55	-65	-95									
-0.5	-25	-26	-28	-30	-32	-35	-37	-41	-44	-49	-56	-66									
0.0	-23	-25	-27	-28	-30	-33	-35	-38	-41	-45	-50	-57	-68								
+0.5	-22	-24	-25	-27	-29	-31	-33	-35	-38	-41	-45	-50	-57	-69							
1.0	-21	-22	-24	-25	-27	-29	-31	-33	-35	-38	-41	-46	-51	-58	-71						
1.5	-20	-21	-22	-24	-25	-27	-29	-31	-33	-35	-38	-42	-46	-51	-58	-71					
2.0	-18	-20	-21	-22	-24	-25	-27	-29	-31	-33	-35	-38	-42	-46	-51	-58	-72				
2.5	-17	-18	-20	-21	-22	-24	-25	-27	-29	-31	-33	-35	-38	-42	-46	-51	-58	-71			
3.0	-16	-17	-18	-20	-21	-22	-24	-25	-27	-29	-31	-33	-35	-38	-42	-46	-51	-58	-71		
3.5	-15	-16	-17	-18	-20	-21	-22	-24	-25	-27	-29	-31	-33	-35	-38	-41	-45	-50	-57	-70	
4.0	-14	-15	-16	-17	-18	-19	-21	-22	-23	-25	-27	-28	-30	-33	-35	-38	-41	-45	-50	-57	-69
4.5	-13	-14	-15	-16	-17	-18	-19	-21	-22	-23	-25	-26	-28	-30	-32	-35	-37	-41	-44	-49	-56
5.0	-12	-13	-14	-15	-16	-17	-18	-19	-20	-22	-23	-25	-26	-28	-30	-32	-34	-37	-40	-44	-49
5.5	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-22	-23	-24	-26	-28	-30	-32	-34	-37	-40	-43
6.0	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-21	-23	-24	-26	-27	-29	-31	-34	-36	-39
6.5	-9	-10	-11	-12	-12	-13	-14	-15	-16	-17	-19	-20	-21	-22	-24	-25	-27	-29	-31	-33	-36
7.0	-8	-9	-10	-11	-11	-12	-13	-14	-15	-16	-17	-18	-19	-21	-22	-23	-25	-27	-28	-30	-33
7.5	-7	-8	-9	-10	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-22	-23	-25	-26	-28	-30
8.0	-6	-7	-8	-9	-9	-10	-11	-12	-13	-14	-14	-15	-17	-18	-19	-20	-21	-23	-24	-26	-27
8.5	-6	-6	-7	-8	-8	-9	-10	-11	-11	-12	-13	-14	-15	-16	-17	-18	-20	-21	-22	-24	-25
9.0	-5	-5	-6	-7	-7	-8	-9	-10	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-22	-23
9.5	-4	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-12	-13	-13	-14	-15	-16	-17	-19	-20	-21
10.0	-3	-4	-4	-5	-5	-6	-7	-7	-8	-9	-10	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19
10.5	-2	-3	-3	-4	-4	-5	-6	-6	-7	-8	-9	-9	-10	-11	-12	-13	-14	-14	-15	-17	-18
11.0	-1	-2	-2	-3	-4	-4	-5	-5	-6	-7	-8	-8	-9	-10	-11	-11	-12	-13	-14	-15	-16
11.5	0	-1	-2	-2	-3	-3	-4	-4	-5	-6	-6	-7	-8	-9	-9	-10	-11	-12	-13	-14	-14
12.0	0	0	-1	-1	-2	-2	-3	-3	-4	-5	-5	-6	-7	-7	-8	-9	-10	-10	-11	-12	-13
12.5	1	1	0	0	-1	-1	-2	-3	-3	-4	-4	-5	-6	-6	-7	-8	-8	-9	-10	-11	-12
13.0	2	1	1	0	0	-1	-1	-2	-2	-3	-3	-4	-5	-5	-6	-7	-7	-8	-9	-9	-10
13.5	3	2	2	1	0	0	-1	-1	-2	-2	-3	-4	-4	-5	-5	-6	-7	-7	-8	-8	-9
14.0	4	3	3	2	1	1	0	0	-1	-1	-2	-3	-3	-4	-4	-5	-6	-6	-7	-7	-8
14.5	4	4	3	3	3	2	1	1	0	0	-1	-2	-2	-3	-3	-4	-4	-5	-6	-6	-6
15.0	5	5	4	4	3	3	2	2	1	1	0	0	-1	-1	-2	-2	-3	-3	-4	-5	-5
15.5	6	5	5	5	4	4	3	3	2	2	1	1	0	0	-1	-1	-2	-2	-3	-3	-4
16.0	7	6	6	5	5	5	4	4	3	3	2	2	1	1	0	0	-1	-1	-2	-2	-3
16.5	7	7	7	6	6	5	5	4	4	4	3	3	2	2	1	1	0	0	-1	-1	-2
17.0	8	8	7	7	7	6	6	5	5	4	4	4	3	3	2	2	1	1	0	0	-1
17.5	9	8	8	8	7	7	7	6	6	5	5	4	4	4	3	3	2	2	1	1	0
18.0	10	9	9	8	8	8	7	7	6	6	5	5	4	4	4	4	3	3	2	2	1
18.5	10	10	10	9	9	8	8	8	7	7	6	6	5	5	5	5	4	4	3	3	2
19.0	11	11	10	10	10	9	9	9	8	8	7	7	6	6	6	6	5	5	4	4	3
19.5	12	11	11	11	10	10	10	9	9	9	8	8	7	7	7	6	6	6	5	5	4
20.0	12	12	12	11	11	11	10	10	10	9	9	9	8	8	8	7	7	6	6	6	5

TABLES

TABLE 25.—Temperature of the dew point in degrees Fahrenheit—Continued

[Tabular values are dew points with respect to water]

Wet-bulb temperature (°F.)	Depression of the wet-bulb thermometer (dry-bulb minus wet bulb)																				
	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5
20.0	17	16	14	13	11	10	8	6	4	2	-1	-4	-7	-11	-16	-22	-30	-44			
20.5	18	17	15	14	12	11	9	7	5	3	0	-3	-6	-9	-13	-19	-26	-36	-62		
21.0	18	17	16	14	13	11	10	8	6	4	1	-1	-4	-8	-11	-16	-22	-31	-46		
21.5	19	18	16	15	14	12	10	9	7	5	2	0	-3	-6	-9	-14	-19	-26	-37	-67	
22.0	20	18	17	16	14	13	11	10	8	6	4	1	-1	-4	-8	-12	-16	-23	-31	-47	
22.5	20	19	18	16	15	14	12	10	9	7	5	2	0	-3	-6	-10	-14	-19	-26	-38	-69
23.0	21	20	18	17	16	14	13	11	10	8	6	4	1	-1	-4	-8	-12	-16	-23	-31	-47
23.5	21	20	19	18	16	15	14	12	10	9	7	5	2	0	-3	-6	-9	-14	-19	-26	-37
24.0	22	21	20	18	17	16	14	13	11	10	8	6	4	1	-1	-4	-8	-11	-16	-22	-31
24.5	22	21	20	19	18	17	15	14	12	11	9	7	5	3	0	-3	-6	-9	-14	-19	-26
25.0	23	22	21	20	19	17	16	15	13	11	10	8	6	4	2	-1	-4	-7	-11	-16	-22
25.5	24	23	22	20	19	18	17	15	14	12	11	9	7	5	3	0	-2	-5	-9	-13	-18
26.0	24	23	22	21	20	19	17	16	15	13	12	10	8	6	4	2	-1	-4	-7	-11	-15
26.5	25	24	23	22	21	19	18	17	16	14	13	11	9	7	5	3	1	-2	-5	-8	-12
27.0	25	24	23	22	21	20	19	18	16	15	14	12	10	9	7	5	2	0	-3	-6	-10
27.5	26	25	24	23	22	21	20	18	17	16	14	13	11	10	8	6	4	1	-1	-4	-7
28.0	27	26	25	24	23	22	20	19	18	17	15	14	12	11	9	7	5	3	0	-2	-5
28.5	27	26	25	24	23	22	21	20	19	18	16	15	13	12	10	8	6	4	2	-1	-3
29.0	28	27	26	25	24	23	22	21	20	18	17	16	14	13	11	9	8	6	3	1	-2
29.5	28	27	27	26	25	24	23	21	20	19	18	17	15	14	12	11	9	7	5	3	0
30.0	29	28	27	26	25	24	23	22	21	20	19	18	16	15	13	12	10	8	6	4	2
30.5	29	29	28	27	26	25	24	23	22	21	20	18	17	16	14	13	11	10	8	6	4
31.0	30	29	28	28	27	26	25	24	23	22	20	19	18	17	15	14	12	11	9	7	5
31.5	31	30	29	28	27	26	25	24	23	22	21	20	19	18	16	15	14	12	10	9	7
32.0	31	30	30	29	28	27	26	25	24	23	22	21	20	19	17	16	15	13	12	10	8
32.5	32	31	30	29	28	27	26	25	24	23	22	21	19	18	17	16	14	13	11	9	7
33.0	32	32	31	30	29	28	27	26	25	24	22	21	20	19	18	16	15	14	12	10	8
33.5	33	32	31	30	30	29	28	27	26	25	24	23	22	21	20	19	17	16	15	13	12
34.0	33	33	32	31	30	29	28	27	26	25	24	23	22	21	19	18	17	16	14	13	12
34.5	34	33	32	32	31	30	29	28	27	26	25	24	23	22	21	19	18	17	15	14	13
35.0	34	34	33	32	31	31	30	29	28	27	26	25	24	23	22	21	20	19	18	16	15
35.5	35	34	33	33	32	31	30	30	29	28	27	26	25	24	23	22	21	20	18	17	16
36.0	35	35	34	33	33	32	31	30	29	28	27	26	25	24	23	22	21	19	18	17	16
36.5	36	35	34	34	33	32	31	30	29	28	27	26	25	24	23	21	20	19	18	17	16
37.0	36	36	35	34	34	33	32	31	31	30	29	28	27	26	25	24	23	22	21	20	19
37.5	37	36	36	35	34	33	33	32	31	30	30	29	28	27	26	25	24	23	22	21	20
38.0	37	37	36	35	34	33	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19
38.5	38	37	37	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19
39.0	38	38	37	37	36	35	34	33	32	32	31	30	29	28	27	26	25	24	23	22	21
39.5	39	38	38	37	36	35	34	34	34	33	32	31	31	30	29	28	27	26	25	24	23
40.0	39	39	38	38	37	36	35	34	34	33	32	31	31	30	29	28	27	26	25	24	23
40.5	40	39	39	38	38	37	36	35	34	34	33	32	31	30	29	28	27	26	25	24	23
41.0	40	40	39	39	38	37	36	35	34	33	33	32	31	30	30	29	28	27	26	25	24
41.5	41	40	40	39	39	38	37	36	35	34	33	33	32	31	30	29	28	27	26	25	24
42.0	41	41	40	40	39	39	38	37	36	35	34	33	33	32	31	30	29	28	27	26	25
42.5	42	41	41	40	40	39	38	37	36	35	34	33	33	32	31	30	29	28	27	26	25
43.0	42	42	41	41	40	40	39	38	37	36	35	34	33	33	32	31	30	29	28	27	26
43.5	43	42	42	41	41	40	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26
44.0	43	43	42	42	41	41	40	40	39	38	37	36	35	34	33	32	31	30	29	28	27
44.5	44	43	43	42	42	41	41	40	40	39	38	37	36	35	34	33	32	31	30	29	28
45.0	45	44	44	43	42	42	41	41	40	40	39	38	37	37	36	35	34	33	32	31	30
45.5	45	45	44	44	43	42	42	41	41	40	40	39	38	37	37	36	35	34	33	32	31
46.0	46	45	45	44	44	43	43	42	41	41	40	40	39	38	37	36	35	34	33	32	31
46.5	46	46	45	45	44	44	43	43	42	41	41	40	40	39	38	37	36	35	34	33	32
47.0	47	46	46	45	45	44	44	43	43	42	41	40	40	39	38	37	36	35	34	33	32
47.5	47	47	46	46	45	44	44	44	43	42	42	41	40	40	39	38	37	36	35	34	33
48.0	48	47	47	46	46	45	45	44	44	43	43	42	42	41	41	40	39	38	37	36	35
48.5	48	48	47	47	46	46	45	45	44	44	43	43	42	42	41	41	40	39	38	37	36
49.0	49	48	48	47	47	46	46	45	45	44	44	43	43	42	42	41	41	40	39	38	37
49.5	49	49	48	48	47	47	46	46	45	45	44	44	43	43	42	42	41	41	40	39	38

TABLES

TABLE 25.—Temperature of the dew point in degrees Fahrenheit—Continued

[Tabular values are dew points with respect to water]

Wet-bulb temperature (° F.)	Depression of the wet-bulb thermometer (dry-bulb minus wet-bulb)																				
	11. 0	11. 5	12. 0	12. 5	13. 0	13. 5	14. 0	14. 5	15. 0	15. 5	16. 0	16. 5	17. 0	17. 5	18. 0	18. 5	19. 0	19. 5	20. 0	20. 5	21. 0
30.0	-1	-3	-7	-10	-15	-21	-29	-42													
30.5	1	-1	-4	-8	-12	-17	-23	-32	-48												
31.0	3	0	-2	-5	-9	-13	-18	-25	-36	-59											
31.5	5	2	0	-3	-6	-10	-14	-20	-28	-40	-90										
32.0	6	4	2	-1	-4	-7	-11	-16	-22	-30	-45										
32.5	7	5	3	1	-2	-5	-8	-13	-18	-24	-34	-55									
33.0	9	7	5	2	0	-3	-6	-10	-14	-20	-27	-39	-78								
33.5	10	8	6	4	2	-1	-4	-7	-11	-16	-22	-30	-45								
34.0	11	9	7	5	3	1	-2	-5	-8	-12	-17	-24	-34	-53							
34.5	12	11	9	7	5	3	0	-3	-6	-9	-14	-19	-26	-38	-69						
35.0	13	12	10	8	6	4	2	-1	-3	-7	-11	-15	-21	-29	-42						
35.5	14	13	11	10	8	6	4	1	-1	-4	-8	-12	-17	-23	-32	-49					
36.0	15	14	13	11	9	7	5	3	1	-2	-5	-9	-13	-18	-25	-35	-57				
36.5	17	15	14	12	10	9	7	5	2	0	-3	-6	-10	-14	-19	-27	-38	-75			
37.0	18	16	15	13	12	10	8	6	4	2	-1	-3	-7	-11	-15	-21	-29	-43			
37.5	19	17	16	15	13	11	10	8	6	4	1	-1	-4	-8	-11	-16	-22	-31	-47		
38.0	20	18	17	16	14	13	11	9	8	5	3	1	-2	-5	-8	-12	-17	-24	-34	-54	
38.5	20	19	18	17	15	14	12	11	9	7	5	3	0	-2	-5	-9	-13	-19	-26	-36	-62
39.0	21	20	19	18	17	15	14	12	10	9	7	5	2	0	-3	-6	-10	-14	-20	-27	-39
39.5	22	21	20	19	18	16	15	13	12	10	8	6	4	2	0	-3	-7	-10	-15	-21	-29
40.0	23	22	21	20	19	17	16	15	13	12	10	8	6	4	2	-1	-4	-7	-11	-16	-22
40.5	24	23	22	21	20	19	17	16	15	13	11	10	8	6	4	1	-1	-4	-8	-12	-16
41.0	25	24	23	22	21	20	18	17	16	14	13	11	10	8	6	3	1	-2	-5	-8	-12
41.5	26	25	24	23	22	21	20	18	17	16	14	13	11	9	7	5	3	1	-2	-5	-8
42.0	27	26	25	24	23	22	21	19	18	17	16	14	13	11	9	7	5	3	1	-2	-5
42.5	28	27	26	25	24	23	22	21	19	18	17	15	14	12	11	9	7	5	3	0	-2
43.0	28	28	27	26	25	24	23	22	20	19	18	17	15	14	12	11	9	7	5	3	0
43.5	29	28	28	27	26	25	24	23	22	20	19	18	17	15	14	12	11	9	7	5	3
44.0	30	29	28	28	27	26	25	24	23	22	20	19	18	17	15	14	12	11	9	7	5
44.5	31	30	29	28	28	27	26	25	24	23	22	20	19	18	17	15	14	12	11	9	7
45.0	32	31	30	29	28	28	27	26	25	24	23	22	20	19	18	17	15	14	12	11	9
45.5	32	32	31	30	29	28	28	27	26	25	24	23	22	20	19	18	17	15	14	12	11
46.0	33	33	32	31	30	29	28	28	27	26	25	24	23	22	20	19	18	17	15	14	12
46.5	34	33	33	32	31	30	29	28	27	26	25	24	23	22	21	19	18	17	15	14	12
47.0	35	34	33	33	32	31	30	29	28	27	26	25	24	23	22	21	19	18	17	15	14
47.5	36	35	34	33	33	32	31	30	29	28	27	26	25	24	23	22	21	19	18	17	16
48.0	36	36	35	34	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	18	17
48.5	37	36	36	35	34	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	18
49.0	38	37	36	36	35	34	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20
49.5	38	38	37	37	36	35	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21
50.0	39	39	38	37	37	36	35	35	34	33	32	31	30	29	28	28	27	26	25	24	23
50.5	40	39	39	38	37	36	36	35	34	33	32	31	30	29	28	28	27	26	25	24	23
51.0	41	40	39	39	38	37	36	36	35	34	33	32	31	30	29	28	27	26	25	24	23
51.5	41	41	40	40	39	38	38	37	36	35	34	33	32	31	30	29	28	27	26	25	24
52.0	42	41	41	40	40	39	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
52.5	43	42	42	41	41	40	39	39	38	37	36	35	34	33	32	31	30	29	28	27	26
53.0	43	43	42	42	41	41	40	39	38	38	37	36	35	34	33	32	31	30	29	28	27
53.5	44	44	43	43	42	41	41	40	39	39	38	37	36	35	34	33	32	31	30	29	28
54.0	45	44	44	43	43	42	41	41	40	39	38	37	36	35	34	33	32	31	30	29	28
54.5	45	45	44	44	43	42	42	41	41	40	39	38	37	36	35	34	33	32	31	30	29
55.0	46	46	45	45	44	43	43	42	41	41	40	39	38	37	36	35	34	33	32	31	30
55.5	47	46	46	45	45	44	44	43	42	42	41	41	40	39	38	37	36	35	34	33	32
56.0	47	47	46	46	45	45	44	44	43	43	42	41	41	40	39	38	37	36	35	34	33
56.5	48	48	47	47	46	45	45	44	44	43	43	42	41	41	40	39	38	37	36	35	34
57.0	49	48	48	47	47	46	46	45	45	44	44	43	42	42	41	40	39	38	37	36	35
57.5	49	49	48	48	48	47	47	46	46	45	45	44	44	43	42	41	40	39	38	37	36
58.0	50	50	49	49	48	48	47	47	46	46	45	45	44	44	43	42	41	40	39	38	37
58.5	51	50	50	49	49	49	48	48	47	47	46	46	45	45	44	43	42	41	40	39	38
59.0	51	51	50	50	50	49	49	48	48	47	47	46	46	45	45	44	43	42	41	40	39
59.5	52	52	51	51	50	50	49	49	48	48	47	47	46	46	45	45	44	43	42	41	40

TABLE 25.—Temperature of the dew point in degrees Fahrenheit—Continued

[Tabular values are dew points with respect to water]

Wet-bulb temperature (°F.)	Depression of the wet-bulb thermometer (dry-bulb minus wet-bulb)																				
	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5
60.0	60	59	59	59	58	58	58	57	57	57	56	56	56	55	55	55	54	54	54	53	53
60.5	60	60	60	59	59	59	58	58	58	57	57	57	56	56	56	55	55	55	54	54	54
61.0	61	60	60	60	60	59	59	59	58	58	58	57	57	57	56	56	56	55	55	55	54
61.5	61	61	61	60	60	60	59	59	59	58	58	58	58	57	57	57	56	56	55	55	55
62.0	62	61	61	61	61	60	60	60	59	59	58	58	58	57	57	57	56	56	55	55	55
62.5	62	62	62	61	61	61	60	60	60	60	60	59	59	58	58	58	57	57	57	56	56
63.0	63	62	62	62	62	61	61	61	60	60	60	60	59	59	59	58	58	58	57	57	57
63.5	63	63	63	62	62	62	62	61	61	61	60	60	60	59	59	59	58	58	58	57	57
64.0	64	63	63	63	63	62	62	62	62	61	61	61	60	60	60	59	59	59	58	58	58
64.5	64	64	64	63	63	63	63	62	62	62	61	61	61	61	60	60	60	59	59	59	58
65.0	65	64	64	64	64	63	63	63	63	62	62	62	61	61	61	60	60	60	59	59	59
65.5	65	65	65	64	64	64	64	63	63	63	63	62	62	62	61	61	61	61	60	60	60
66.0	66	65	65	65	65	64	64	64	64	63	63	63	62	62	62	62	61	61	61	61	60
66.5	66	66	66	65	65	65	65	64	64	64	64	63	63	63	63	62	62	62	61	61	61
67.0	67	67	66	66	66	66	65	65	65	64	64	64	64	63	63	63	63	62	62	62	61
67.5	67	67	67	67	66	66	66	66	65	65	64	64	64	64	63	63	63	63	62	62	62
68.0	68	68	67	67	67	67	67	66	66	66	65	65	65	65	64	64	64	63	63	63	63
68.5	68	68	68	68	67	67	67	67	66	66	66	66	65	65	65	65	64	64	64	63	63
69.0	69	69	68	68	68	68	67	67	67	66	66	66	66	65	65	65	65	64	64	64	64
69.5	69	69	69	69	68	68	68	68	67	67	67	67	66	66	66	66	65	65	65	65	65
70.0	70	70	69	69	69	69	68	68	68	68	67	67	67	67	66	66	66	66	65	65	65
70.5	70	70	70	70	69	69	69	69	69	68	68	68	68	67	67	67	67	66	66	66	66
71.0	71	71	70	70	70	70	69	69	69	69	68	68	68	68	67	67	67	67	66	66	66
71.5	71	71	71	71	70	70	70	70	69	69	69	69	68	68	68	68	67	67	67	67	67
72.0	72	72	71	71	71	71	70	70	70	70	69	69	69	69	69	68	68	68	68	67	67
72.5	72	72	72	72	71	71	71	71	71	70	70	70	70	69	69	69	69	69	68	68	68
73.0	73	73	72	72	72	72	72	71	71	71	71	71	71	70	70	70	70	69	69	69	69
73.5	73	73	73	73	72	72	72	72	72	71	71	71	71	71	71	70	70	70	69	69	69
74.0	74	74	73	73	73	73	73	72	72	72	72	72	71	71	71	71	70	70	70	70	70
74.5	74	74	74	74	74	73	73	73	73	72	72	72	72	72	71	71	71	71	71	70	70
75.0	75	75	74	74	74	74	74	73	73	73	73	73	72	72	72	72	71	71	71	71	71
75.5	75	75	75	75	75	74	74	74	74	74	73	73	73	73	73	72	72	72	72	71	71
76.0	76	76	75	75	75	75	75	74	74	74	74	74	73	73	73	73	73	72	72	72	72
76.5	76	76	76	76	76	75	75	75	75	74	74	74	74	74	74	73	73	73	73	73	72
77.0	77	77	76	76	76	76	76	75	75	75	75	75	74	74	74	74	74	74	73	73	73
77.5	77	77	77	77	77	76	76	76	76	76	75	75	75	75	75	74	74	74	74	74	73
78.0	78	78	77	77	77	77	77	77	76	76	76	76	75	75	75	75	75	74	74	74	74
78.5	78	78	78	78	78	77	77	77	77	77	76	76	76	76	76	76	76	76	75	75	75
79.0	79	79	78	78	78	78	78	78	78	77	77	77	77	76	76	76	76	76	76	75	75
79.5	79	79	79	79	79	78	78	78	78	78	78	77	77	77	77	77	76	76	76	76	76
80.0	80	80	79	79	79	79	79	79	79	78	78	78	78	78	77	77	77	77	76	76	76
80.5	80	80	80	80	80	79	79	79	79	79	79	78	78	78	78	78	78	77	77	77	77
81.0	81	81	81	80	80	80	80	80	80	80	80	80	79	79	79	79	79	79	78	78	78
81.5	81	81	81	81	81	81	80	80	80	80	80	80	80	79	79	79	79	79	78	78	78
82.0	82	82	82	81	81	81	81	81	81	80	80	80	80	80	80	80	79	79	79	79	78
82.5	82	82	82	82	82	82	81	81	81	81	81	81	81	81	81	80	80	80	80	80	80
83.0	83	83	83	82	82	82	82	82	82	82	82	81	81	81	81	81	80	80	80	80	80
83.5	83	83	83	83	83	83	82	82	82	82	82	82	81	81	81	81	81	81	81	81	81
84.0	84	84	84	83	83	83	83	83	83	82	82	82	82	82	82	82	81	81	81	81	81
84.5	84	84	84	84	84	84	83	83	83	83	83	83	83	82	82	82	82	82	82	81	81
85.0	85	85	85	84	84	84	84	84	84	84	83	83	83	83	83	83	82	82	82	82	82
85.5	85	85	85	85	85	85	84	84	84	84	84	84	84	83	83	83	83	83	83	82	82
86.0	86	86	86	85	85	85	85	85	85	85	84	84	84	84	84	84	83	83	83	83	83
86.5	86	86	86	86	86	86	85	85	85	85	85	85	85	85	85	85	84	84	84	84	83
87.0	87	87	87	86	86	86	86	86	86	86	85	85	85	85	85	85	85	84	84	84	84
87.5	87	87	87	87	87	87	86	86	86	86	86	86	86	86	85	85	85	85	85	85	85
88.0	88	88	88	87	87	87	87	87	87	87	86	86	86	86	86	86	86	86	86	86	86
88.5	88	88	88	88	88	88	88	87	87	87	87	87	87	87	87	86	86	86	86	86	86
89.0	89	89	89	88	88	88	88	88	88	88	88	88	87	87	87	87	87	87	87	87	87
89.5	89	89	89	89	89	89	88	88	88	88	88	88	88	88	87	87	87	87	87	87	87

TABLES

TABLE 25.—Temperature of the dew point in degrees Fahrenheit—Continued

[Tabular values are dew points with respect to water]

Wet-bulb temperature (° F.)	Depression of the wet-bulb thermometer (dry-bulb minus wet bulb)																				
	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5
90.0	90	90	90	89	89	89	89	89	89	89	89	88	88	88	88	88	88	88	87	87	87
90.5	90	90	90	90	90	90	90	89	89	89	89	89	89	89	89	88	88	88	88	88	88
91.0	91	91	91	90	90	90	90	90	90	90	90	89	89	89	89	89	89	89	89	89	88
91.5	91	91	91	91	91	91	91	91	90	90	90	90	90	90	90	90	89	89	89	89	89
92.0	92	92	92	92	91	91	91	91	91	91	91	91	91	90	90	90	90	90	90	90	89
92.5	92	92	92	92	92	92	92	92	92	91	91	91	91	91	91	91	90	90	90	90	90
93.0	93	93	93	93	92	92	92	92	92	92	92	92	92	91	91	91	91	91	91	91	91
93.5	93	93	93	93	93	93	93	93	93	93	92	92	92	92	92	92	92	91	91	91	91
94.0	94	94	94	94	93	93	93	93	93	93	93	93	93	92	92	92	92	92	92	92	92
94.5	94	94	94	94	94	94	94	94	94	93	93	93	93	93	93	93	93	92	92	92	92

Wet-bulb temperature (° F.)	Depression of the wet-bulb thermometer (dry-bulb minus wet-bulb)																				
	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0	17.5	18.0	18.5	19.0	19.5	20.0	20.5	21.0
60.0	53	52	52	51	51	51	50	50	49	49	48	48	48	47	47	46	46	45	45	44	44
60.5	53	53	52	52	52	51	51	50	50	50	49	49	48	48	47	47	46	46	45	45	45
61.0	54	53	53	53	52	52	52	51	51	50	50	49	49	49	48	48	47	47	46	46	45
61.5	54	54	54	53	53	53	52	52	51	51	51	50	50	49	49	48	48	48	47	47	46
62.0	55	55	54	54	54	53	53	52	52	52	51	51	51	50	50	49	49	48	48	47	47
62.5	56	55	55	55	54	54	54	53	53	52	52	52	51	51	50	50	49	49	48	48	48
63.0	56	56	56	55	55	55	54	54	53	53	53	52	52	52	51	51	50	50	49	49	49
63.5	57	57	56	56	56	55	55	54	54	54	53	53	53	52	52	51	51	51	50	50	49
64.0	58	57	57	57	56	56	55	55	55	54	54	53	53	53	53	52	51	51	51	51	50
64.5	58	58	57	57	57	56	56	56	55	55	55	54	53	53	53	53	52	52	51	51	51
65.0	59	58	58	58	57	57	57	56	56	56	55	55	55	54	54	53	53	53	52	52	52
65.5	59	59	59	58	58	58	57	57	57	56	56	56	55	55	55	54	54	54	53	53	52
66.0	60	60	59	59	59	58	58	58	57	57	57	56	56	56	55	55	55	54	54	54	53
66.5	61	60	60	60	59	59	59	58	58	58	57	57	57	56	56	55	55	55	54	54	54
67.0	61	61	61	60	60	60	59	59	59	58	58	58	57	57	57	56	56	55	55	55	55
67.5	62	61	61	61	61	60	60	60	59	59	59	58	58	58	57	57	57	56	56	56	55
68.0	62	62	62	61	61	61	61	60	60	60	59	59	58	58	58	57	57	57	57	56	56
68.5	63	63	62	62	62	61	61	61	61	60	60	60	59	59	59	58	58	58	57	57	57
69.0	64	63	63	63	62	62	62	62	61	61	61	60	60	60	59	59	59	59	58	58	58
69.5	64	64	64	63	63	63	62	62	62	62	61	61	61	60	60	60	60	59	59	59	58
70.0	65	64	64	64	64	63	63	63	63	62	62	62	61	61	61	60	60	60	60	59	59
70.5	65	65	65	64	64	64	63	63	63	63	63	62	62	62	61	61	61	61	60	60	60
71.0	66	66	65	65	65	65	64	64	64	63	63	63	63	63	62	62	62	61	61	61	60
71.5	66	66	66	66	65	65	65	65	64	64	64	64	63	63	63	62	62	62	62	61	61
72.0	67	67	67	66	66	66	66	65	65	65	64	64	64	63	63	63	63	63	62	62	62
72.5	68	67	67	67	67	66	66	66	66	65	65	65	64	64	64	63	63	63	63	63	62
73.0	68	68	68	67	67	67	67	66	66	66	66	65	65	65	64	64	64	64	64	63	63
73.5	69	69	68	68	68	68	67	67	67	66	66	66	66	65	65	65	65	65	64	64	64
74.0	69	69	69	69	68	68	68	68	67	67	67	67	66	66	66	66	65	65	65	65	64
74.5	70	70	69	69	69	69	69	68	68	68	68	67	67	67	66	66	66	66	66	65	65
75.0	70	70	70	70	70	69	69	69	69	68	68	68	68	67	67	67	67	66	66	66	66
75.5	71	71	71	70	70	70	69	69	69	69	69	68	68	68	68	68	67	67	67	67	66
76.0	72	71	71	71	71	70	70	70	70	70	69	69	69	69	68	68	68	68	67	67	67
76.5	72	72	72	72	71	71	71	71	70	70	70	70	70	69	69	69	69	68	68	68	68
77.0	73	73	72	72	72	72	71	71	71	71	71	70	70	70	70	69	69	69	69	69	68
77.5	73	73	73	73	72	72	72	72	72	71	71	71	71	71	70	70	70	70	70	69	69
78.0	74	74	73	73	73	73	73	72	72	72	72	72	71	71	71	71	70	70	70	70	70
78.5	74	74	74	74	74	73	73	73	73	73	72	72	72	72	72	71	71	71	71	71	70
79.0	75	75	75	74	74	74	74	74	74	73	73	73	73	72	72	72	72	72	72	71	71
79.5	76	75	75	75	75	75	74	74	74	74	74	73	73	73	73	73	72	72	72	72	71

TABLE 25.—Temperature of the dew point in degrees Fahrenheit—Continued

[Tabular values are dew points with respect to water]

Wet-bulb temperature (°F.)	Depression of the wet-bulb thermometer (dry-bulb minus wet-bulb)																				
	11. 0	11. 5	12. 0	12. 5	13. 0	13. 5	14. 0	14. 5	15. 0	15. 5	16. 0	16. 5	17. 0	17. 5	18. 0	18. 5	19. 0	19. 5	20. 0	20. 5	21. 0
80.0	76	76	76	76	75	75	75	75	75	74	74	74	74	74	73	73	73	73	73	72	72
80.5	77	76	76	76	76	76	76	75	75	75	75	74	74	74	74	74	74	73	73	73	73
81.0	77	77	77	77	76	76	76	76	76	76	75	75	75	75	75	74	74	74	74	74	73
81.5	78	78	77	77	77	77	77	76	76	76	76	76	76	75	75	75	75	75	74	74	74
82.0	78	78	78	78	78	77	77	77	77	77	76	76	76	76	76	76	75	75	75	75	75
82.5	79	79	79	78	78	78	78	78	77	77	77	77	77	77	76	76	76	76	76	75	75
83.0	79	79	79	79	79	79	78	78	78	78	78	77	77	77	77	77	77	77	76	76	76
83.5	80	80	80	79	79	79	79	79	79	78	78	78	78	78	78	77	77	77	77	77	76
84.0	81	80	80	80	80	80	80	79	79	79	79	79	78	78	78	78	78	78	77	77	77
84.5	81	81	81	81	80	80	80	80	80	80	79	79	79	79	79	79	78	78	78	78	78
85.0	82	81	81	81	81	81	81	80	80	80	80	80	80	79	79	79	79	79	79	78	78
85.5	82	82	82	82	82	81	81	81	81	81	81	80	80	80	80	80	80	80	79	79	79
86.0	83	83	82	82	82	82	82	82	81	81	81	81	81	81	80	80	80	80	80	80	80
86.5	83	83	83	83	83	82	82	82	82	82	82	82	81	81	81	81	81	81	80	80	80
87.0	84	84	84	83	83	83	83	83	83	82	82	82	82	82	82	81	81	81	81	81	81
87.5	84	84	84	84	84	84	83	83	83	83	83	83	83	82	82	82	82	82	82	81	81
88.0	85	85	85	84	84	84	84	84	84	84	84	83	83	83	83	83	83	82	82	82	82
88.5	85	85	85	85	85	85	85	84	84	84	84	84	84	84	83	83	83	83	83	83	82
89.0	86	86	86	86	85	85	85	85	85	85	85	84	84	84	84	84	84	83	83	83	83
89.5	87	86	86	86	86	86	86	85	85	85	85	85	85	85	85	84	84	84	84	84	84
90.0	87	87	87	87	87	86	86	86	86	86	86	86	85	85	85	85	85	85	84	84	84
90.5	88	87	87	87	87	87	87	87	86	86	86	86	86	86	86	85	85	85	85	85	85
91.0	88	88	88	88	88	87	87	87	87	87	87	86	86	86	86	86	86	86	85	85	85
91.5	89	89	88	88	88	88	88	88	87	87	87	87	87	87	87	87	86	86	86	86	86
92.0	89	89	89	89	89	89	88	88	88	88	88	88	88	87	87	87	87	87	87	87	87
92.5	90	90	90	89	89	89	89	89	89	89	88	88	88	88	88	88	88	88	87	87	87
93.0	90	90	90	90	90	90	90	89	89	89	89	89	89	88	88	88	88	88	88	88	88
93.5	91	91	91	90	90	90	90	90	90	90	90	89	89	89	89	89	89	89	89	88	88
94.0	91	91	91	91	91	91	91	91	90	90	90	90	90	90	90	89	89	89	89	89	89
94.5	92	92	92	92	91	91	91	91	91	91	91	91	90	90	90	90	90	90	90	90	89

TABLE 26.—Millimeters to millibars

Mm.	0	1	2	3	4	5	6	7	8	9
	<i>Mb.</i>									
690	919. 9	921. 3	922. 6	923. 9	925. 3	926. 6	927. 9	929. 3	930. 6	931. 9
700	933. 3	934. 6	935. 9	937. 3	938. 6	939. 9	941. 3	942. 6	943. 9	945. 3
710	946. 6	947. 9	949. 3	950. 6	951. 9	953. 3	954. 6	955. 9	957. 3	958. 6
720	959. 9	961. 3	962. 2	963. 6	965. 3	966. 6	967. 9	969. 3	970. 6	971. 9
730	973. 3	974. 6	975. 9	977. 3	978. 6	979. 9	981. 3	982. 6	983. 9	985. 3
740	986. 6	987. 9	989. 3	990. 6	991. 9	993. 3	994. 6	995. 9	997. 3	998. 6
750	999. 9	1, 001. 3	1, 002. 6	1, 003. 9	1, 005. 3	1, 006. 6	1, 007. 9	1, 009. 3	1, 010. 6	1, 011. 9
760	1, 013. 3	1, 014. 6	1, 015. 9	1, 017. 2	1, 018. 6	1, 019. 9	1, 021. 2	1, 022. 6	1, 023. 9	1, 025. 2
770	1, 026. 6	1, 027. 9	1, 029. 2	1, 030. 6	1, 031. 9	1, 033. 2	1, 034. 6	1, 035. 9	1, 037. 2	1, 038. 6
780	1, 039. 9	1, 041. 2	1, 042. 6	1, 043. 9	1, 045. 2	1, 046. 6	1, 047. 9	1, 049. 2	1, 050. 6	1, 051. 9
790	1, 053. 2	1, 054. 6	1, 055. 9	1, 057. 2	1, 058. 6	1, 059. 9	1, 061. 2	1, 062. 6	1, 063. 9	1, 065. 2

TABLE 27.—Correction of mercurial barometer for temperature (English measures)

ADD

Temperature (° F.)	Observed reading (inches)					Temperature (° F.)	Observed reading (inches)				
	28.5	29.0	29.5	30.0	30.5		28.5	29.0	29.5	30.0	30.5
0	0.07	0.08	0.08	0.08	0.08	16	0.03	0.03	0.03	0.03	0.04
1	.07	.07	.07	.08	.08	17	.03	.03	.03	.03	.03
2	.07	.07	.07	.07	.07	18	.03	.03	.03	.03	.03
3	.07	.07	.07	.07	.07	19	.02	.02	.03	.03	.03
4	.06	.06	.07	.07	.07	20	.02	.02	.02	.02	.02
5	.06	.06	.06	.06	.07	21	.02	.02	.02	.02	.02
6	.06	.06	.06	.06	.06	22	.02	.02	.02	.02	.02
7	.06	.06	.06	.06	.06	23	.02	.02	.02	.02	.02
8	.05	.05	.06	.06	.06	24	.01	.01	.01	.01	.01
9	.05	.05	.05	.05	.05	25	.01	.01	.01	.01	.01
10	.05	.05	.05	.05	.05	26	.01	.01	.01	.01	.01
11	.05	.05	.05	.05	.05	27					
12	.04	.04	.04	.04	.05	28					
13	.04	.04	.04	.04	.04	29					
14	.04	.04	.04	.04	.04	30					
15	.04	.04	.04	.04	.04						

SUBTRACT

Temperature (° F.)	Observed reading (inches)					Temperature (° F.)	Observed reading (inches)				
	28.5	29.0	29.5	30.0	30.5		28.5	29.0	29.5	30.0	30.5
31	0.01	0.01	0.01	0.01	0.01	66	0.10	0.10	0.10	0.10	0.10
32	.01	.01	.01	.01	.01	67	.10	.10	.10	.10	.11
33	.01	.01	.01	.01	.01	68	.10	.10	.10	.11	.11
34	.01	.01	.01	.02	.02	69	.10	.11	.11	.11	.11
35	.02	.02	.02	.02	.02	70	.11	.11	.11	.11	.11
36	.02	.02	.02	.02	.02	71	.11	.11	.11	.12	.12
37	.02	.02	.02	.02	.02	72	.11	.11	.12	.12	.12
38	.02	.02	.02	.03	.03	73	.11	.12	.12	.12	.12
39	.03	.03	.03	.03	.03	74	.12	.12	.12	.12	.12
40	.03	.03	.03	.03	.03	75	.12	.12	.12	.13	.13
41	.03	.03	.03	.03	.03	76	.12	.12	.13	.13	.13
42	.04	.04	.04	.04	.04	77	.12	.13	.13	.13	.13
43	.04	.04	.04	.04	.04	78	.13	.13	.13	.13	.14
44	.04	.04	.04	.04	.04	79	.13	.13	.14	.14	.14
45	.04	.04	.04	.04	.04	80	.13	.14	.14	.14	.14
46	.04	.05	.05	.05	.05	81	.14	.14	.14	.14	.14
47	.05	.05	.05	.05	.05	82	.14	.14	.14	.14	.15
48	.05	.05	.05	.05	.05	83	.14	.14	.14	.15	.15
49	.05	.05	.05	.06	.06	84	.14	.14	.15	.15	.15
50	.06	.06	.06	.06	.06	85	.15	.15	.15	.15	.16
51	.06	.06	.06	.06	.06	86	.15	.15	.15	.16	.16
52	.06	.06	.06	.06	.06	87	.15	.15	.16	.16	.16
53	.06	.06	.06	.07	.07	88	.15	.16	.16	.16	.16
54	.06	.07	.07	.07	.07	89	.16	.16	.16	.16	.17
55	.07	.07	.07	.07	.07	90	.16	.16	.16	.17	.17
56	.07	.07	.07	.07	.08	91	.16	.16	.17	.17	.17
57	.07	.08	.08	.08	.08	92	.16	.17	.17	.17	.18
58	.08	.08	.08	.08	.08	93	.17	.17	.17	.17	.18
59	.08	.08	.08	.08	.08	94	.17	.17	.17	.18	.18
60	.08	.08	.08	.08	.09	95	.17	.17	.18	.18	.18
61	.08	.08	.09	.09	.09	96	.17	.18	.18	.18	.19
62	.09	.09	.09	.09	.09	97	.18	.18	.18	.18	.19
63	.09	.09	.09	.09	.10	98	.18	.18	.18	.19	.19
64	.09	.09	.10	.10	.10	99	.18	.18	.19	.19	.19
65	.09	.10	.10	.10	.10	100	.18	.19	.19	.19	.20

MANUAL OF MARINE METEOROLOGICAL OBSERVATIONS

TABLE 28.—*Reduction of barometric reading to mean sea level*

[Reading, 30 inches. The correction is always to be added.]

Height in feet	Temperature of air (dry bulb)									
	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°
5	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
10	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01
15	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02
20	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02
25	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03
30	.04	.04	.04	.04	.03	.03	.03	.03	.03	.03
35	.04	.04	.04	.04	.04	.04	.04	.04	.04	.04
40	.05	.05	.05	.05	.04	.04	.04	.04	.04	.04
45	.06	.05	.05	.05	.05	.05	.05	.05	.05	.05
50	.06	.06	.06	.06	.06	.06	.05	.05	.05	.05
55	.07	.07	.06	.06	.06	.06	.06	.06	.06	.06
60	.07	.07	.07	.07	.07	.07	.06	.06	.06	.06
65	.08	.08	.08	.08	.07	.07	.07	.07	.07	.07
70	.09	.08	.08	.08	.08	.08	.08	.07	.07	.07
75	.09	.09	.09	.09	.08	.08	.08	.08	.08	.08
80	.10	.10	.09	.09	.09	.09	.09	.08	.08	.08
85	.10	.10	.10	.10	.10	.10	.09	.09	.09	.09
90	.11	.11	.11	.10	.10	.10	.10	.10	.09	.09
95	.12	.11	.11	.11	.11	.11	.10	.10	.10	.10
100	.12	.12	.12	.12	.11	.11	.11	.11	.10	.10

TABLE 29.—*Reduction of the mercurial barometer to standard gravity (45°) (30 inches)*

Lat.	Cor.	Lat.	Cor.	Lat.	Cor.	Lat.	Cor.
°	<i>Inch</i>	°	<i>Inch</i>	°	<i>Inch</i>	°	<i>Inch</i>
0	-0.08	25	-0.05	45	0.00	70	+0.06
5	-.08	30	-.04	50	+.01	75	+.07
10	-.08	35	-.03	55	+.03	80	+.08
15	-.07	40	-.01	60	+.04	85	+.08
20	-.06	45	0.00	65	+.05	90	+.08

CODE TABLE 30

Meteorological Q-Code Signals

Meteorological Q-code signals are reproduced below as a guide to ship's officers in furnishing meteorological data when requested by aircraft. Note that when these signals are used in replies, the message may require some additional (supplementary) information to convey clearly meteorological data that cannot be presented in the order, units, etc., specified in the following list.

Signal	Question	Reply
QAM	What is the latest available meteorological observation for --- (place)?	Meteorological observation made at --- (place) at --- hours was as follows --- When the reply is presented in the Q-code form, the sequence of information is to be, as far as practicable, that pertaining to the Q-signal sequence QAN, QBA, QNY, QMU. When presented in this sequence, it is not necessary to precede each type of datum with the corresponding Q-signal.
QAN	What is the surface wind direction (in degrees relative to MAGNETIC North, unless otherwise indicated in the question) and speed at --- (place)?	The surface wind direction and speed at --- (place) at --- hours is --- (direction) --- (speed figures and units). NOTE.—Unless otherwise indicated in the question, answer (or advice), surface wind direction is given in degrees relative to MAGNETIC North.
QAO	What is the wind direction in degrees TRUE and speed at --- (position or zone/s) at each of the --- (figures) --- (units) levels above --- (datum)? NOTE.—Merchant ships can be expected to furnish wind data only for the level near the SURFACE (sea level).	The wind direction and speed at --- (position or zone/s) at the following heights above --- (datum) is: --- (vertical distance in figures and units) --- degrees TRUE --- (speed in figures and units) --- (vertical distance in figures and units) --- degrees TRUE --- (speed in figures and units).
QBA	What is the horizontal visibility at --- (place)?	The horizontal visibility at --- (place) at --- hours is --- (distance figures and units).
QFC	What is the amount, the type, and the height above --- (datum) of the base of the cloud at --- (place, position or zone)?	At --- (place, position, or zone) the base of the cloud is --- eighths --- type at --- (figures and units) height above --- (datum). NOTE.—If several cloud layers or masses are present, the lowest is reported first.
QFF	[At --- (place)] what is the present atmospheric pressure converted to mean sea level in accordance with meteorological practice?	At --- (place) the atmospheric pressure converted to mean sea level in accordance with meteorological practice is (or was determined at --- hours to be) --- tenths of millibars (e. g., 9237 for 923.7 millibars).
QFY	Please report the present meteorological landing conditions [at --- (place)].	The present meteorological landing conditions at --- (place) are ----. When the reply is prepared in the Q-code form, the sequence of information is to be, as far as practicable, that pertaining to the Q-signal sequence QAN, QBA, QNY, QMU. When presented in this sequence, it is not necessary to precede each type of datum with the corresponding Q-signal.
QMU	What is the surface temperature at --- (place) and what is the dew-point temperature at that place?	The surface temperature at --- (place) at --- hours is --- degrees and the dew-point temperature at that time and place is --- degrees.
QNY	What is the present weather and the intensity thereof at --- (place, position, or zone)?	The present weather and intensity thereof at --- (place, position, or zone) at --- hours is --- (duststorm, sandstorm, rain, snow, hail, thunderstorm, etc., or if no such phenomena as these is present, signal QNY NIL). My TRUE track is --- degrees.
QTI	What is your TRUE track?	Here is the information requested ----.
QUB	Can you give me, in the following order, information concerning visibility, height of clouds, direction and velocity of ground wind at --- (place of observation)?	
QUH	Will you give me the present barometric pressure at sea level?	The present barometric pressure at sea level is --- (units).
QUK	Can you tell me the condition of the sea observed at --- (place or co-ordinates)?	The sea at --- (place or co-ordinates) is ----.

MANUAL OF MARINE METEOROLOGICAL OBSERVATIONS

CODE TABLE 30 (Continued)

Meteorological Q-Code Signals—Continued

Signal	Question	Reply																																	
QUL	Can you tell me the swell observed at --- (place or co-ordinates)?	<p>The swell at --- (place or co-ordinates) is ----. Complete the answer, information or advice form by the use of the following numbered alternatives:</p> <table border="1"> <thead> <tr> <th>Number</th> <th>Length of swell</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>-----</td> <td></td> </tr> <tr> <td>1</td> <td>Short or average-----</td> <td>Low.</td> </tr> <tr> <td>2</td> <td>Long-----</td> <td>Do.</td> </tr> <tr> <td>3</td> <td>Short-----</td> <td>Moderate.</td> </tr> <tr> <td>4</td> <td>Average-----</td> <td>Do.</td> </tr> <tr> <td>5</td> <td>Long-----</td> <td>Do.</td> </tr> <tr> <td>6</td> <td>Short-----</td> <td>Heavy.</td> </tr> <tr> <td>7</td> <td>Average-----</td> <td>Do.</td> </tr> <tr> <td>8</td> <td>Long-----</td> <td>Do.</td> </tr> <tr> <td>9</td> <td>Confused-----</td> <td></td> </tr> </tbody> </table> <p>Additionally, indicate the direction of swell by the use of the appropriate cardinal or intermediate quadrantal point (abbreviation where appropriate), e. g., NORTH, NE, E, SE, etc., following the numbered alternative for indicating swell condition. The descriptions in the above-numbered alternatives are as follows:</p> <p style="text-align: center;"><i>Length of swell</i></p> <p>Short: 0-100 meters (0-300 feet). Average: 100-200 meters (300-600 feet). Long: Over 200 meters (600 feet).</p> <p style="text-align: center;"><i>Height of swell</i></p> <p>Low: Below 1.75 meters (below 6 feet). Moderate: 1.75 to 3.75 (6 to 12 feet). Heavy: Above 3.75 meters (above 12 feet).</p>	Number	Length of swell	Height	0	-----		1	Short or average-----	Low.	2	Long-----	Do.	3	Short-----	Moderate.	4	Average-----	Do.	5	Long-----	Do.	6	Short-----	Heavy.	7	Average-----	Do.	8	Long-----	Do.	9	Confused-----	
Number	Length of swell	Height																																	
0	-----																																		
1	Short or average-----	Low.																																	
2	Long-----	Do.																																	
3	Short-----	Moderate.																																	
4	Average-----	Do.																																	
5	Long-----	Do.																																	
6	Short-----	Heavy.																																	
7	Average-----	Do.																																	
8	Long-----	Do.																																	
9	Confused-----																																		
QUN ¹	Will vessels in my immediate vicinity [(or in the vicinity of --- latitude --- longitude) (or of ---)] please indicate their position, TRUE course and speed?	My position, TRUE course and speed are ----.																																	

¹ All stations of the international aeronautical telecommunication service will interpret this signal as referring to TRUE TRACK. English-speaking stations of the maritime mobile service may interpret this signal as referring to TRUE HEADING. When communicating with the latter it is recommended that supplementary use be made of the signal QTI to avoid any misunderstanding.

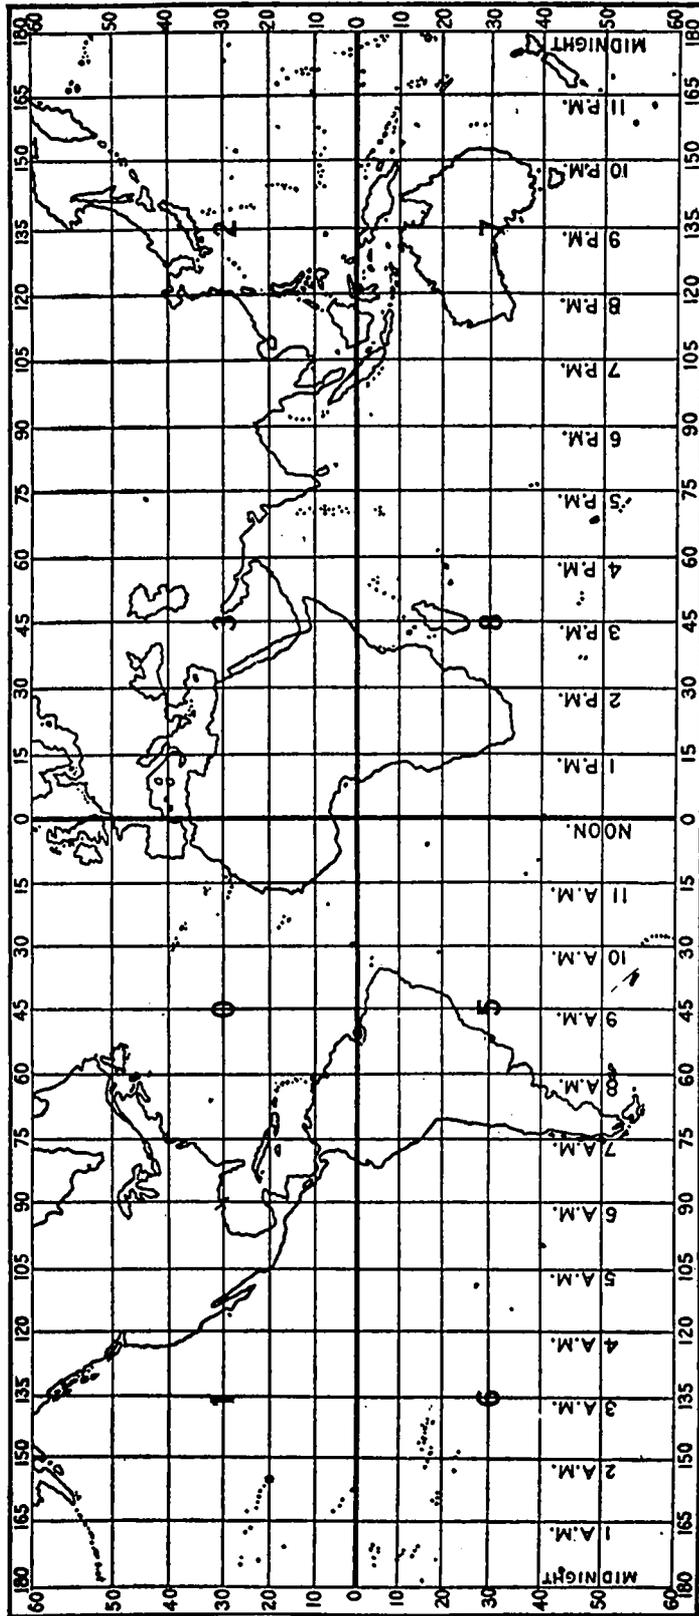


CHART 1. This chart gives the local time corresponding to Greenwich mean noon.