

**U.S. DEPARTMENT OF COMMERCE
National Oceanic and Atmospheric Administration
Environmental Research Laboratories**

NOAA Technical Memorandum ERL NSSL-68

**THE NSSL/WKY-TV TOWER
DATA COLLECTION PROGRAM: APRIL - JULY 1972**

R. Craig Goff
W. David Zittel

Property of
NWC Library
University of Oklahoma

National Severe Storms Laboratory
Norman, Oklahoma
May 1974



E R R A T A

NOAA Technical Memorandum ERL NSSL-68

THE NSSL/WKY-TV TOWER
DATA COLLECTION PROGRAM: APRIL - JULY 1972

R. Craig Goff
W. David Zittel

- Pg 23 line 8: Fig 22 not Fig 21
Pg 24 Fig 23: ordinate should have units ($^{\circ}$)
Pg 24 Footnote, line 1: Delete $|\Delta T|$ before the period
Pg 32 4th to last line: Delete "Since the squall . . . to
west," and capitalize "P" in "pre-storm."
Pg 30 Table 4: Index #17 T, 25m, delta mode
- Pg 38 References: Carter, J. K. (1970): Should read
ERL NSSL-50 not ERL NSSL-62.

National Severe Storms Laboratory
Norman, Oklahoma
May, 1974

NOTICE

The NOAA Environmental Research Laboratories does not endorse any proprietary product or proprietary material mentioned in this publication.

TABLE OF CONTENTS

	<u>Page</u>
LIST OF FIGURES	v
LIST OF TABLES	vii
LIST OF SYMBOLS	ix
ABSTRACT	1
1. INTRODUCTION	1
2. HISTORY	5
3. TOWER SITE AND TERRAIN	5
4. INSTRUMENTATION AND CALIBRATION	5
4.1 Introduction	5
4.2 Dry-Bulb Temperature System	7
4.3 Wet-Bulb Temperature System	8
4.4 Horizontal Wind System	10
4.5 Vertical Velocity	11
4.6 Pressure	11
4.7 Rainfall	12
4.8 Signal Conditioning Apparatus	12
5. DATA COLLECTION PROGRAM DURING 1972	12
6. MAINTENANCE PROCEDURES	13
7. PROBLEMS IN DATA COLLECTION	14
8. QUALITY CONTROL	15
8.1 General Statements	15
8.2 Quality Control to Determine Deviations from Gross Features	16
8.3 Quality Control for Infrequent Transients	22
8.4 Additional Quality Control Techniques	25
9. SUMMARY OF AVAILABLE DATA	26
9.1 Digital Data	26
9.2 Analog Strip Chart Data	32
10. SOME INTERESTING METEOROLOGICAL PHENOMENA	32
10.1 Introduction	32

	<u>Page</u>
10.2 Gravity Currents	32
10.3 Cold Front Passages	33
10.4 Hydraulic (Pressure) Jumps	33
10.5 Shear-Gravity Waves	35
10.6 Mesoscale Spectra	35
11. SUMMARY AND CONCLUSIONS	35
12. ACKNOWLEDGMENTS	37
13. REFERENCES	37
APPENDIX A - ARCHIVE TAPE INFORMATION (1969-1971)	41
APPENDIX B - ANALOG STRIP CHART DATA (1966-1971)	45

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1.	Southwest face of NSSL meteorological tower.	2
2.	USGS quadrangle map of tower locale.	3
3.	Large-scale map of roughness elements near tower.	4
4.	Tower instrumentation at each level.	6
5.	Tower instrument boom configuration.	6
6.	Tower effects of wind speed (modified for NSSL Tower; original from Gill <u>et al.</u> , 1966).	7
7.	Thermistor calibration apparatus.	7
8.	Chebyshev polynomial fitted to thermistor corrections.	8
9.	Schematic of wet-bulb thermistor, radiation shield, and water reservoir apparatus.	9
10.	Humidity test chamber for wet-bulb thermistors and thermometers.	9
11.	Deviations in aerovane wind speed output from indicated true tunnel speed. (Symbols represent different aerovanes.)	11
12.	Comparison of sonic anemometer and aerovane (wind speed). Scatter coefficient indicated.	11
13.	Signal conditioning system block diagram.	13
14.	Strip chart data of vertical velocity showing (a) biasing due to improper alignment, (b) broken propellor blade, (c) faulty bearings, (d) normal turbulent periods, (e) normal quiescent periods.	17
15.	Representative average wind speed profiles on (a) low shear and (b) high shear days.	19
16.	Representative average wind direction profiles on (a) low shear days and (b) high shear days.	21
17.	Typical average temperature profile. Dry adiabat (γ_d) indicated.	21
18.	Typical σ_y profile.	21

<u>Figure</u>		<u>Page</u>
19.	Anamolous σ_U profile.	22
20.	Typical σ_α profile.	22
21.	Anamolous σ_T profile (defective thermistors: 2 and 90 m).	23
22.	Comparison of $ \Delta U _{\max}$ with σ_U .	24
23.	Comparison of $ \Delta \alpha _{\max}$ with σ_α .	24
24.	Archived tower data sample.	27
25.	Gravity current associated with a squall line. Vertical velocity plotted at 177 and 444 m (stippled). Winds with north or south components separated by (ooo) line. Lapse rate ($C 10^{-2} m^{-1}$) solid isolines.	33
26.	Diagram of shallow cold front (from Sanders, unpublished).	34
27.	Boundary layer profile of pressure jump. Isolines of temperature (C).	34
28.	Time/height section of the tower layer showing shear gravity waves. (a) wind direction ($^\circ$), (b) wind speed ($m sec^{-1}$).	36
29.	Hodograph of tower layer during shear gravity wave occurrences.	37

LIST OF TABLES

<u>Table</u>		<u>Page</u>
1.	Sensor circuit calibration voltages and corrections.	14
2.	1972 consolidated tower output format.	27
3.	User's guide to 1972 digital data.	28
4.	Index of parameters.	30
5.	Quality of data by parameter (%).	31
6.	Overall quality of data by category (%).	32

LIST OF SYMBOLS

K	Coefficient of expansion of thermometer glass.
n	Number of degree graduations emergent from bath.
P	Pressure.
R	Rainfall.
S	Emergent stem correction.
T	Temperature.
T_b	Bath temperature.
T_w	Wet-bulb temperature.
t	Emergent stem temperature.
U	Wind speed.
w	Vertical velocity.
α	Wind direction.
σ_α	Standard deviation of wind direction.
σ_T	Standard deviation of temperature.
σ_U	Standard deviation of wind speed.
$ \Delta\alpha $	Absolute value of the wind direction difference (time series data).
$ \Delta U $	Absolute value of the wind speed difference (time series data).

THE NSSL/WKY-TV TOWER DATA COLLECTION PROGRAM:
APRIL - JULY 1972

R. Craig Goff and W. David Zittel

Since 1966, the National Severe Storms Laboratory has operated meteorological instruments on a 481 m TV tower north of Oklahoma City. Initially, only horizontal wind and temperature data from seven levels were sensed and recorded, but thereafter the tower program gradually expanded. Later, relative humidity and vertical velocity sensors were added, and in 1968 data were recorded digitally for the first time.

In this report the calibration, operation, and maintenance of tower sensors and signal conditioning equipment, as implemented in 1972, are described in detail. Also discussed at length are procedures used for quality control. The report includes a survey of research objectives. Strip chart and digital data available are summarized in two appendices.

1. INTRODUCTION

The National Severe Storms Laboratory (NSSL) has gathered meteorological data from a tall tower (the WKY-TV transmitter) since 1966. In the last 5 yr (1968-1972), data have been collected primarily in spring when the likelihood of severe thunderstorms is high. During the 1972 spring and early summer, 3 mo of nearly continuous meteorological data were collected in digital form.

The 1972 data were routinely recorded at 1-min intervals and during stormy periods, at 10-sec intervals. Horizontal wind speed and direction, vertical wind speed, dry- and wet-bulb temperatures, surface pressure, and rainfall were recorded. This report presents a brief history of the tower and a description of the site follows; calibration and maintenance procedures, problems in data collection, and quality control procedures are discussed in detail. A summary of the data collected and a short discussion of proposed research is presented.

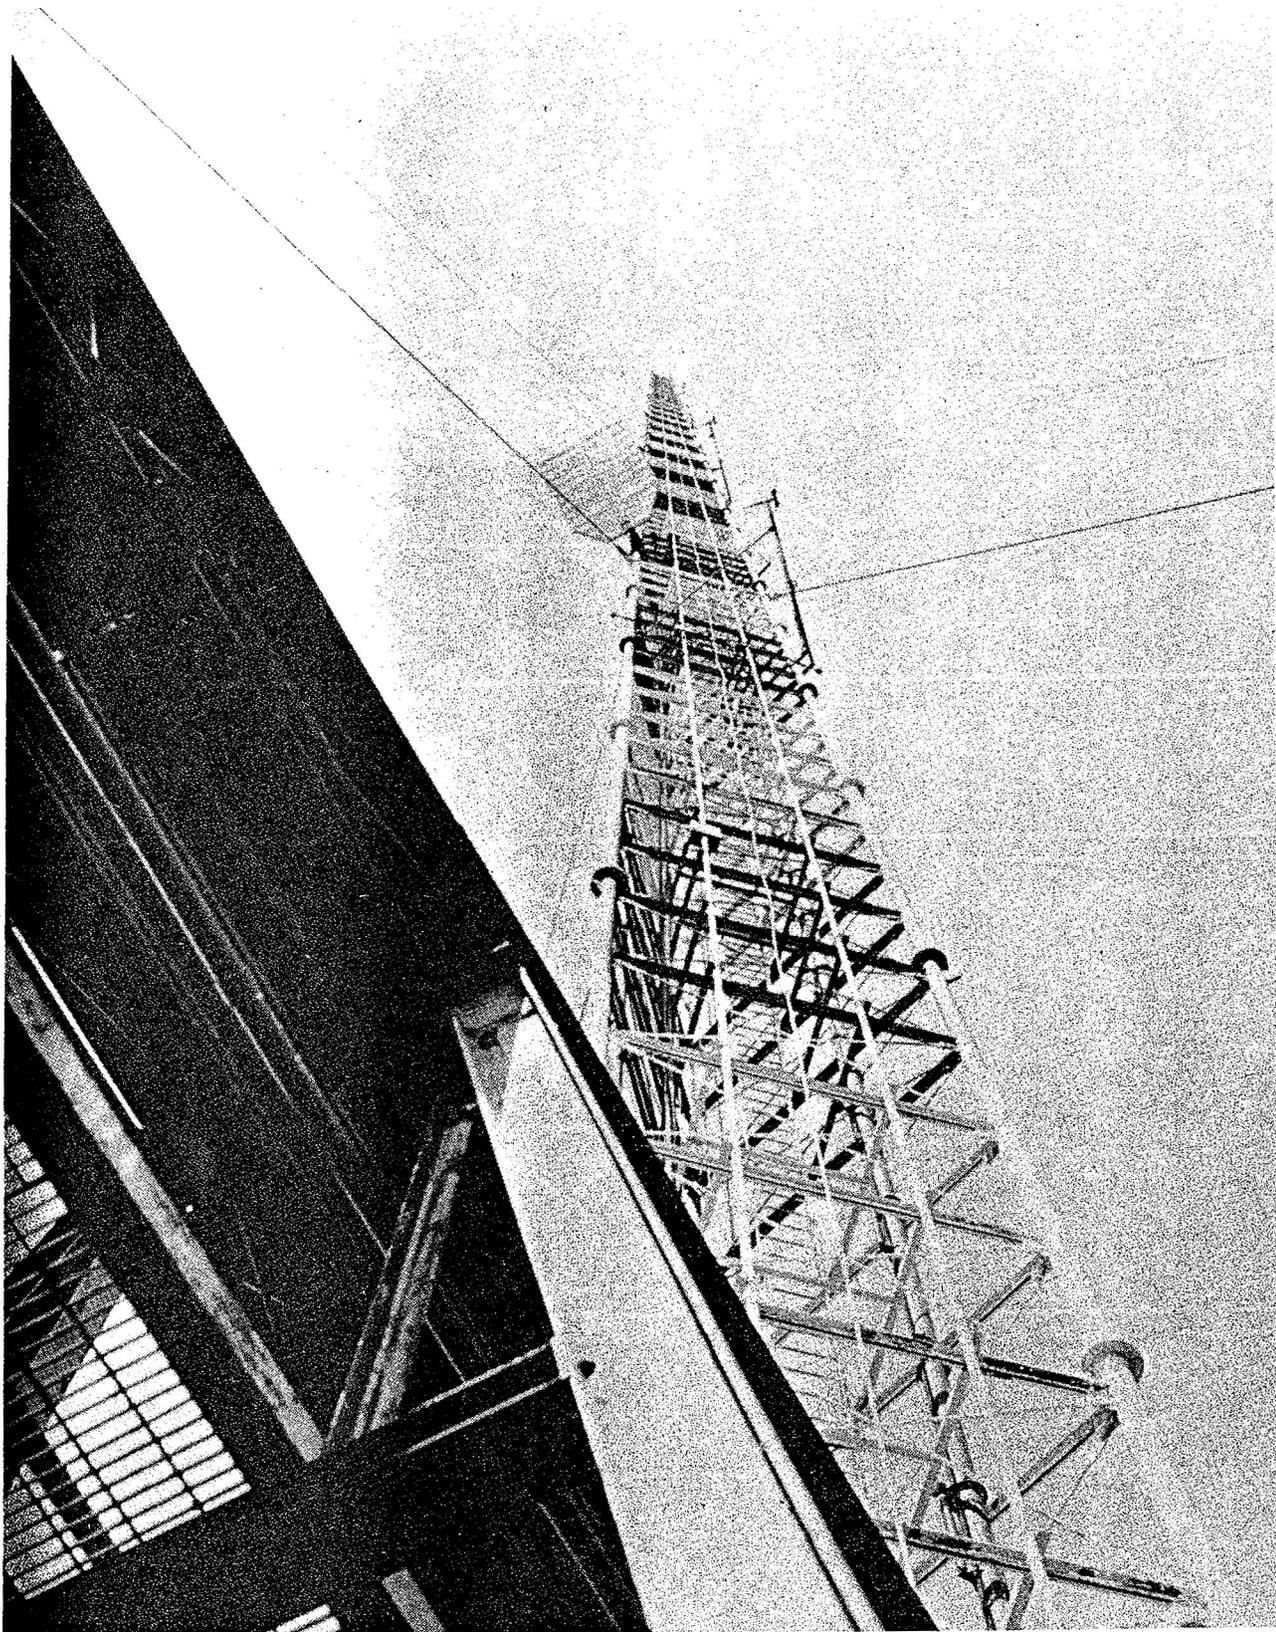


Figure 1. Southwest face of NSSL meteorological tower.

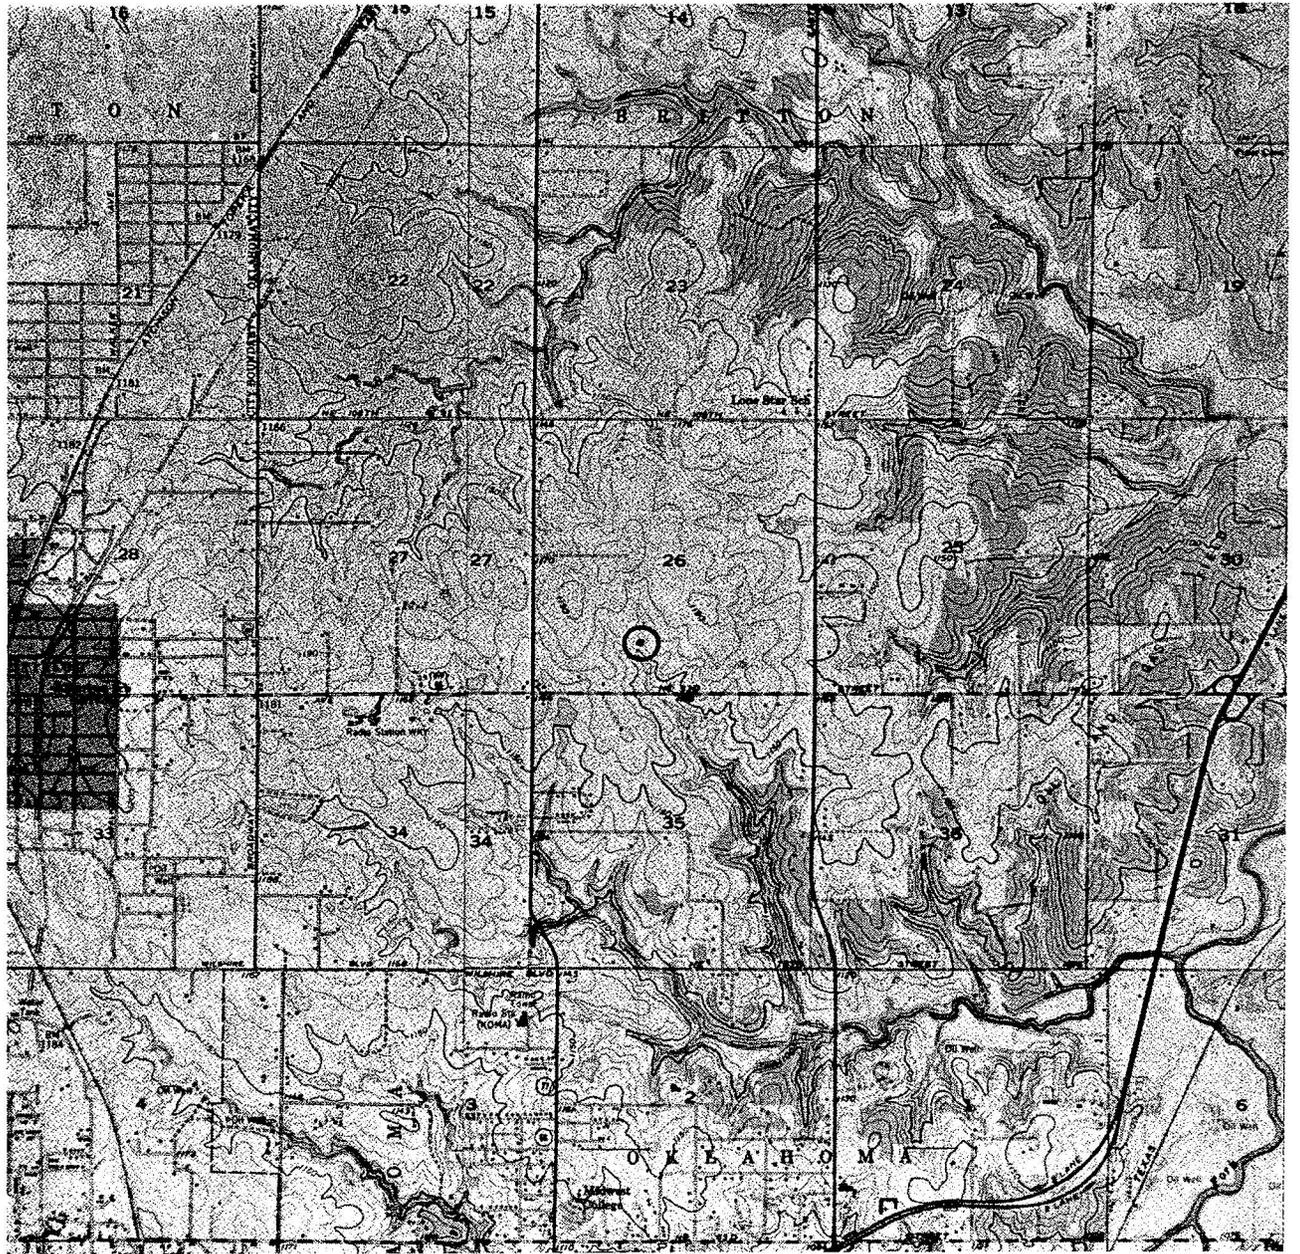


Figure 2. USGS quadrangle map of tower locale.

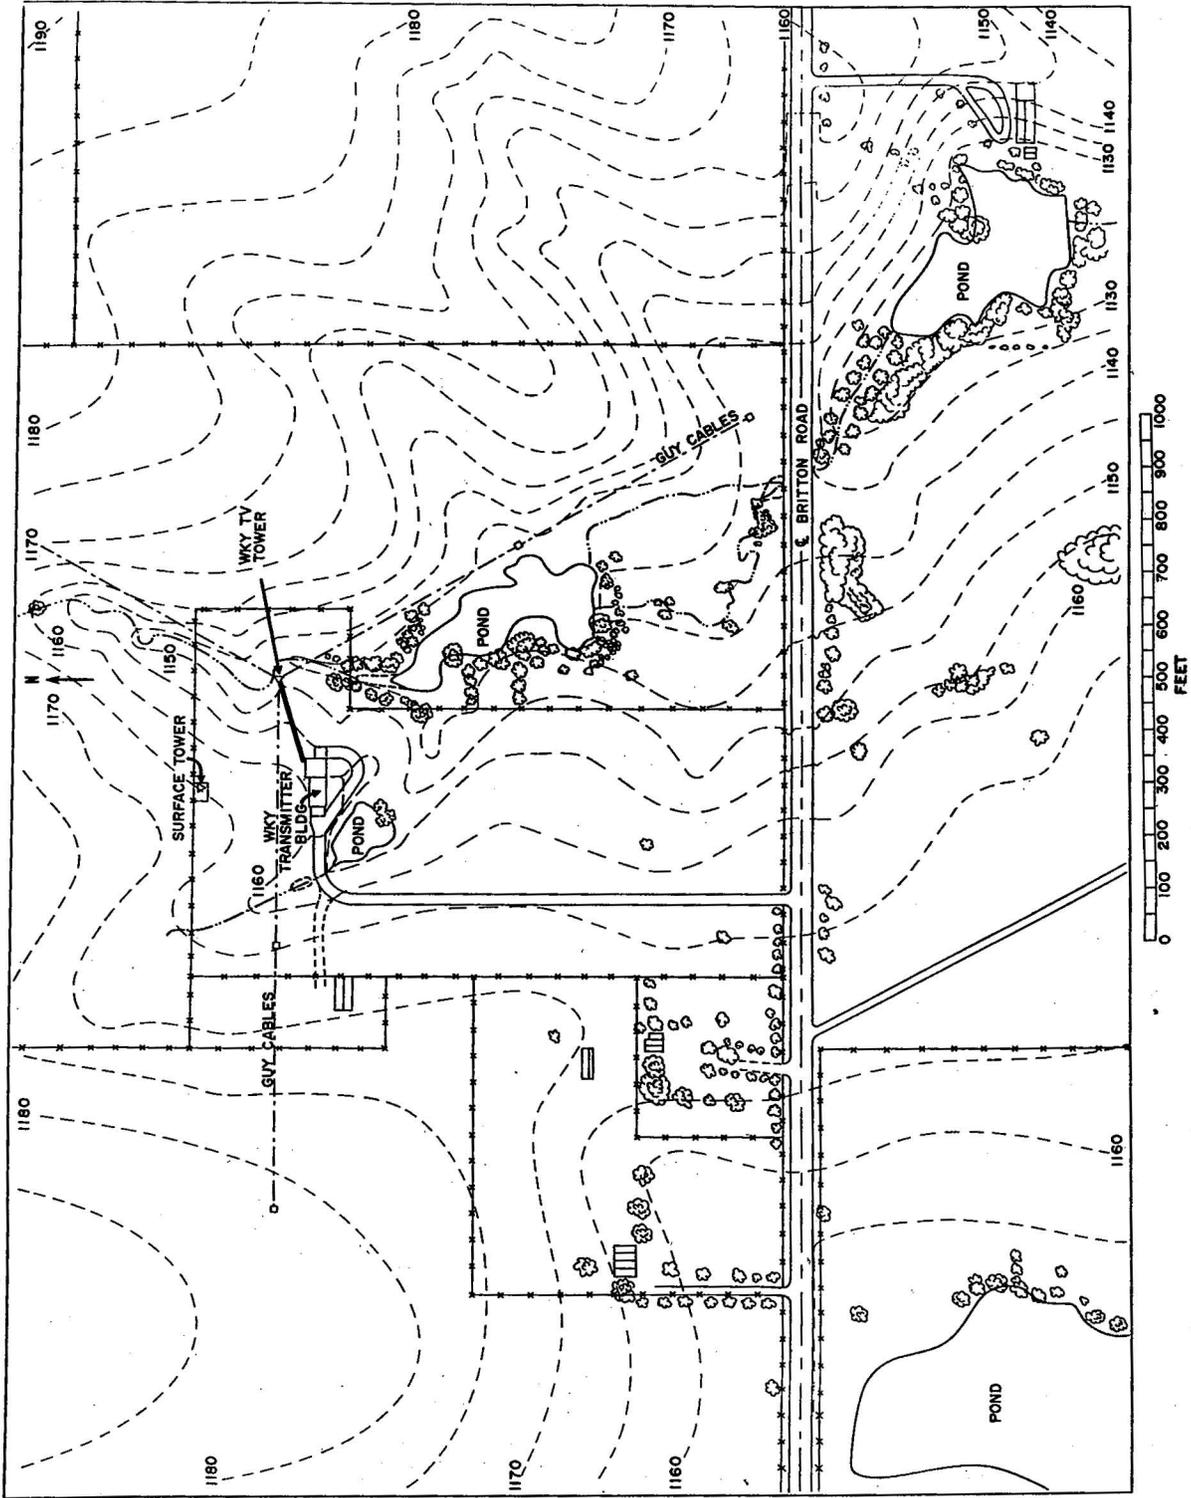


Figure 3. Large-scale map of roughness elements near tower.

2. HISTORY

In 1966, with WKY Television Systems cooperation and National Aeronautics and Space Administration (NASA) financial support, the National Severe Storms Laboratory (NSSL) installed meteorological instruments on the 481 m WKY-TV transmitting tower (Fig. 1). The objective was to provide a vertical probe that would yield thunderstorm information in the boundary layer while complementing other existing NSSL programs (e.g., radar, surface networks, and upper air networks).

During 1966 and 1967, 1 yr of wind observations and 6 mo of temperature data were collected on analog strip charts. Climatological studies made from these data define average characteristics in the lower portion of the planetary boundary layer. After the first year of operation, data were collected routinely in the spring during the annual severe storm period primarily for NSSL use but occasionally for outside interests.

Digital data acquisition with magnetic tape started in 1968. In 1970 relative humidity and vertical velocity sensors were added. A new tower level at 26 m was installed in 1971, replacing surface wind and temperature observations collected from a site about 75 m northwest of the tower. Rainfall and pressure were recorded at the surface for the first time in 1971. In 1972, a faster response wet-bulb system replaced the Phys-Chemical Research Corporation Model PCRC-11 relative humidity sensors.

3. TOWER SITE AND TERRAIN

The tower, located at 35°42.2'N, 97°29.4'W, is approximately 10 km north-northeast of downtown Oklahoma City and 357° at 36.8 km from NSSL. The Oklahoma City suburbs extend to within 4 km south and west of the tower site. The area surrounding the tower consists of gently rolling terrain with no more than 40 m change in elevation within a 4 km radius of the tower (Fig. 2). The land is used for agriculture; wooded areas are confined generally to gullies and around ponds. The tower stands at the north end of a small draw oriented southeast-northwest (Fig. 3). A pond, surrounded by trees 5 to 8 m tall, extends from about 65 m south to 200 m south-southeast of the tower. The WKY-TV transmitter building is 65 m west-southwest of the tower and is about 12 m high relative to the tower base; therefore, the lowest tower level is 14 m above the top of the building. The area west through north to southeast of the tower is free of large obstructions for about 1 km. Additional information about the physical character of the site is provided by Sanders and Weber (1970); they also give details on the aerodynamic roughness (z_0) properties.

4. INSTRUMENTATION AND CALIBRATION

4.1 Introduction

Instruments for horizontal wind and temperature are mounted at 26, 44, 89, 177, 266, 355, and 444 m on the 481 m WKY-TV tower. At 26, 177 and 444 m, vertical velocity and wet-bulb temperature sensors are also mounted. Pressure and rainfall are measured at the surface. Figure 4 illustrates the instrumen-

LEVEL	HT (m)	PARAMETERS
6	444	U, α, W, T, T_w
5	355	U, α, T
4	266	U, α, T
3	177	U, α, W, T, T_w
2	90	U, α, T
1	44	U, α, T
0	26	U, α, W, T, T_w
Sfc		R_f, P

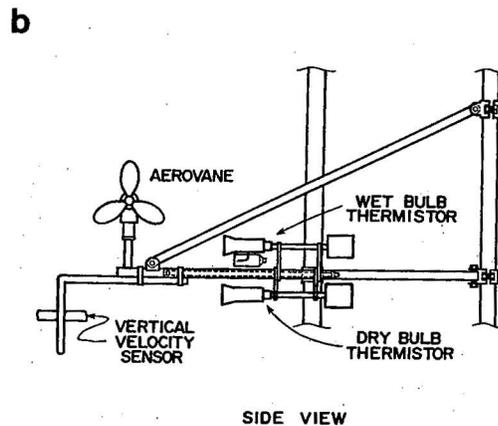
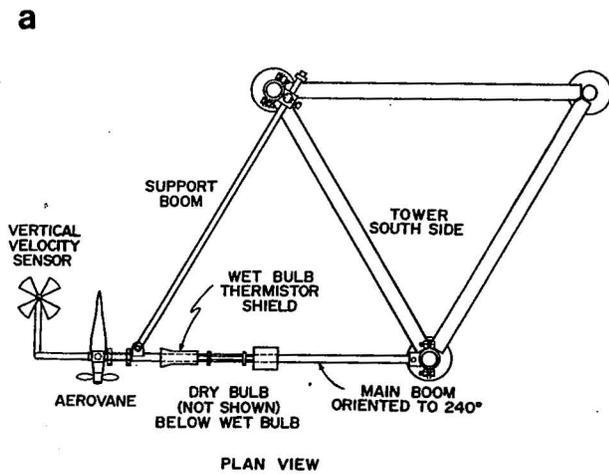


Figure 4. Tower instrumentation at each level.

Figure 5. Tower instrument boom configuration.

tation at each level while Fig. 5 shows the boom configuration plan. The main boom is aligned to an azimuth angle of 240° . The orientation represents a compromise between instrument accessibility and favorable exposure for measuring the horizontal winds. Figure 6, from the Gill *et al.* (1966) study and adapted to the tower by Carter (1970), indicates the tower's effect on wind speed as a function of direction. Between 350° and 70° (through north) the tower may reduce the wind speed up to 40% but the winds are within this section less than 25% of the time (Crawford and Hudson, 1970). The prevailing wind is from the south and southwest.


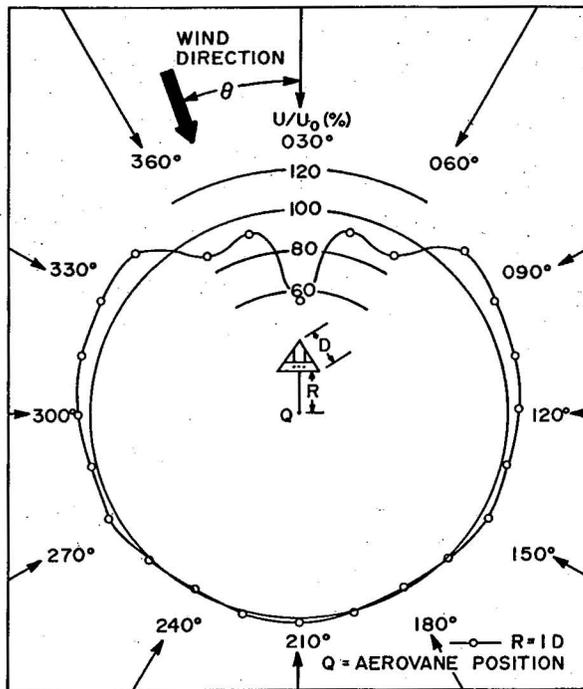


Figure 6. Tower effects of wind speed (modified for NSSL Tower; original from Gill et al., 1966).


4.2 Dry-Bulb Temperature System

The temperature is measured on the tower with Yellow Spring's linearized thermistor composites housed in aspirated radiation shields and mounted on the tower booms (Fig. 5). Two independent electrical systems are used: one gives directly the ambient temperature at 26 and 444 m; the other measures the difference in air temperature between a reference thermistor at 444 m and those at each level (Carter, 1970). Two temperature observations at 26 m provide the redundancy desirable for quality control (see sec. 8).

The thermistors are calibrated each winter. The testing apparatus (Fig. 7) consists of an alcohol bath continuously stirred with a mechanical mixer into which the sensors and a National Bureau of Standards (NBS) certified liquid-in-glass thermometer

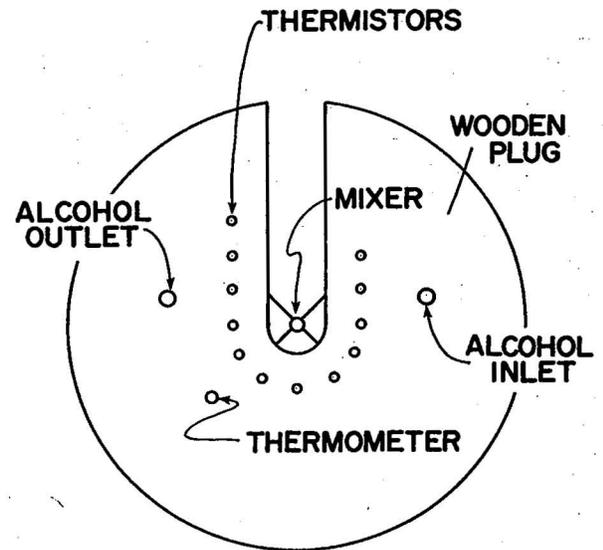

TOP VIEW

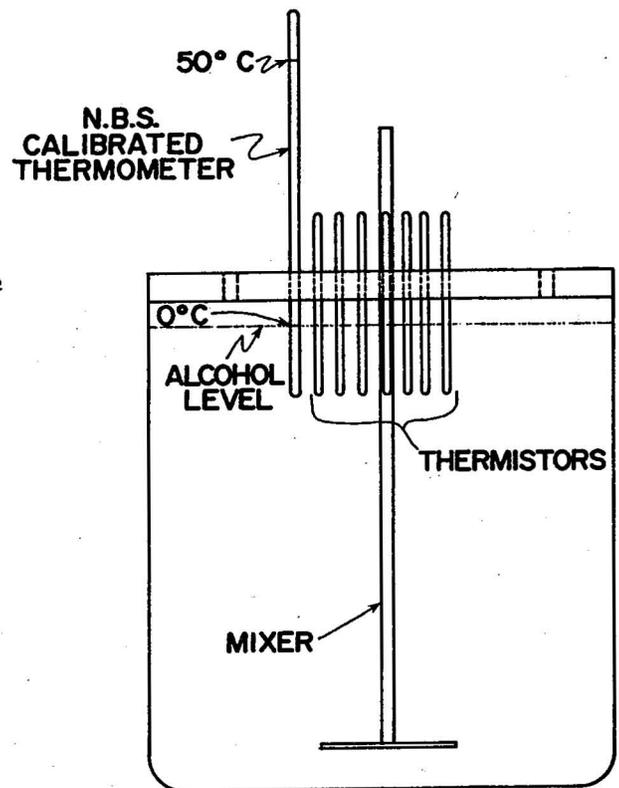

FRONT VIEW

Figure 7. Thermistor calibration apparatus.

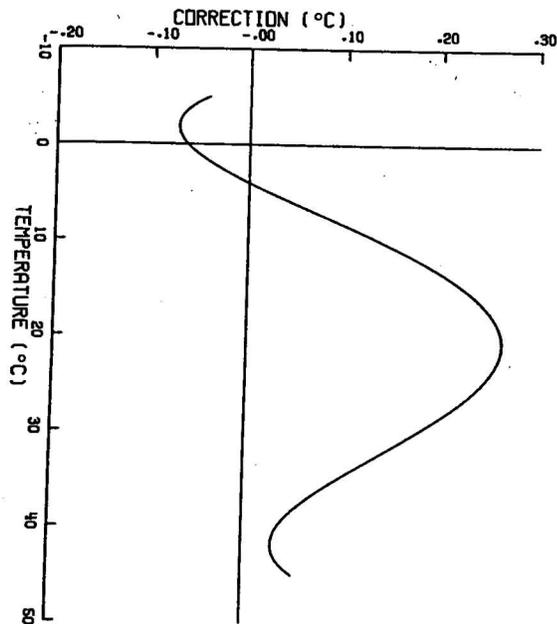


Figure 8. Chebyshev polynomial fitted to thermistor corrections.

each thermistor (Fig. 8). Subsequently, these polynomials are used to determine the actual temperature during tape archiving.

4.3 Wet-Bulb Temperature System

The wet-bulb temperature system used on the tower is a modified dry-bulb system. The system consists of a thermistor covered with a wick mounted in an aspirated shield. The wick runs to a water supply through a small hole in the bottom of the shield (Fig. 9). After the wick is primed, capillary action maintains saturation. The electrical circuitry is similar to that used for the ambient dry-bulb thermistors. The shielded wet-bulb thermistors are mounted on the boom above the shielded dry-bulb sensors (Fig. 5b).


The system was tested in the early autumn of 1971 both in a closed chamber and in a field test. In the closed chamber test, two NBS certified liquid-in-glass reference thermometers (one used as a wet-bulb thermometer) were mounted side by side (Fig. 10). Dry- and wet-bulb thermistor probes were mounted in an aspirated shield with the wet bulb behind the dry bulb (in the field, two separate shields were used). The shield was placed downstream from the reference thermometers. A fan evaporated water from a pan and circulated the air within the chamber. Water evaporating from the wet-bulb thermometer wick was assumed to have a negligible effect on the readings.

(U.S. Dept. of Commerce, 1966) are placed. The thermistors are wired in a circuit similar to that at the tower and connected to a digital voltmeter for direct temperature read-out. The bath temperature is raised from -10C to 50C in approximately 1C increments by adding heated alcohol. Since the NBS thermometer is calibrated for total immersion, we correct for the emergent stem with

$$S = Kn(T_b - t) \quad (1)$$


where S is emergent stem correction; K is coefficient of expansion of thermometer glass (=0.00016); n is number of degree graduations emergent from bath; T_b is bath temperature and t is emergent stem temperature.

Correction to absolute temperature for the thermometer (National Bureau of Standards) is also applied. The sum of the immersion correction, S, correction to absolute temperature, and correction for each thermistor comprise the total correction. Fifth order polynomials are fitted to the correction data of

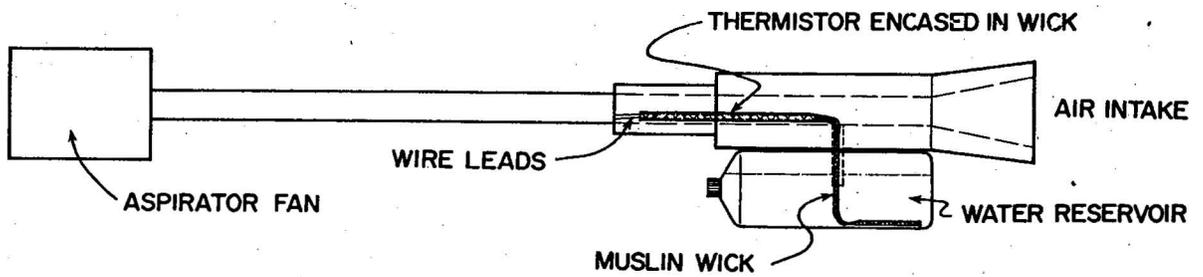

WET BULB SCHEMATIC

Figure 9. Schematic of wet-bulb thermistor, radiation shield, and water reservoir apparatus.

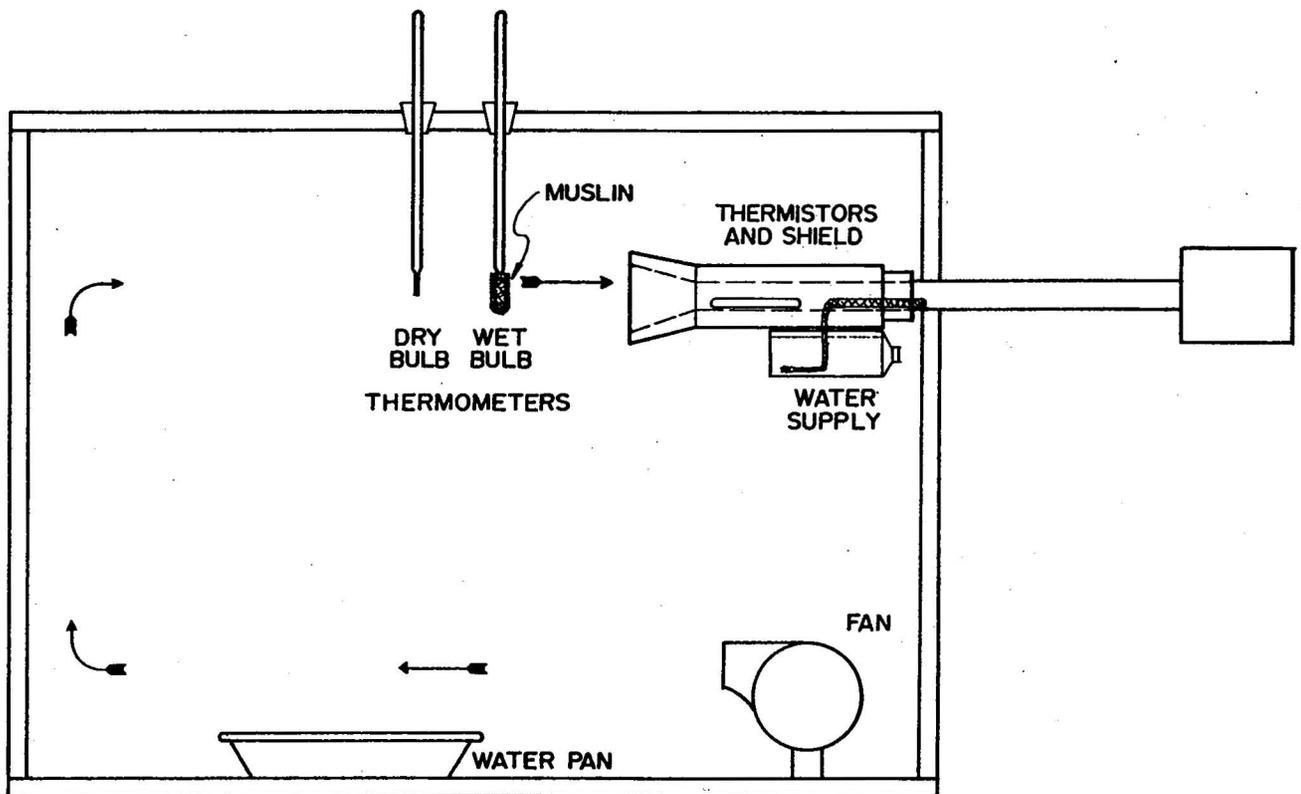

SIDE VIEW

Figure 10. Humidity test chamber for wet-bulb thermistors and thermometers.

The test results indicated that the time constant (see Gill and Hexter, 1972) of the wet-bulb thermistor was roughly 1 min with an accuracy of $\pm 2\%$ of true relative humidity. The thermistors used in the wet-bulb system were calibrated as described in Section 4.2.

4.4 Horizontal Wind System

Wind speed and direction are sensed with Bendix Model 120 aerovanes and recorded on analog strip charts. The aerovanes are mounted at seven levels on the tower as shown in Figs. 4a and 4b. The manufacturer's specification for the aerovanes is given by Carter (1970). In August 1971, the aerovanes were tested in the National Center for Atmospheric Research (NCAR) wind tunnel in Boulder, Colorado. Wind speed settings at 5, 10, 15, 20, 25, 30, 40 and 50 kt were determined by a pitot tube arrangement and a R. M. Young model 1200 wind sensor. The aerovane output was displayed on a digital voltmeter and analog strip chart. Figure 11 shows the deviations of the aerovane digital voltmeter readings from the Hook gage readings. The average deviation from the Hook gage values is -0.85 kt. Since the manufacturer's specifications for aerovanes list an accuracy of ± 0.5 kt, a maximum difference of 1 kt between two instruments is reasonable. The data in Fig. 11 have a maximum scatter of 0.4 kt between 5 and 40 kt. Below 50 kt wind speed, all the aerovanes agree well. At 50 kt, wind tunnel effects apparently become serious (not shown).¹

Later in 1972, the aerovane wind speed output was checked against a sonic anemometer. Assuming high accuracy for the sonic, the results are indeed favorable, as Fig. 12 taken from Hanafusa and Mitsuta attests (private communication).

Before mounting the aerovanes, we bench tested the output by connecting the transducers to a fixed rpm motor. Generators are adjusted to a constant voltage output (9.2 V at 1800 rpm) corresponding to 75.6 kt. The test is repeated on the tower except that the output is read at the tower base. The wind generator is adjusted if necessary to compensate for line voltage loss.

To calibrate the wind direction sensor, we place a specially built jig over the boom (oriented to 240°) with the vane locked in position parallel to the boom. We then read the direction on a synchro-to-digital converter and correct to 240° , if necessary, by adjusting the vane base connector. Accuracy is roughly $\pm 3^\circ$.

¹The wind tunnel facility was located in a small room and exhaust air was buffeted by the wall directly behind the tunnel outlet. In addition, the motor driving the fan had an unexplainable 10-sec oscillation that became significant about 40 kt. At the time of the test, it was not possible to determine the dynamic character of the aerovane; i.e., determine the distance constant for wind speed or natural wavelength and damping ratio for the wind direction. Definitions of dynamic and static characteristics follow Gill and Hexter (1972).

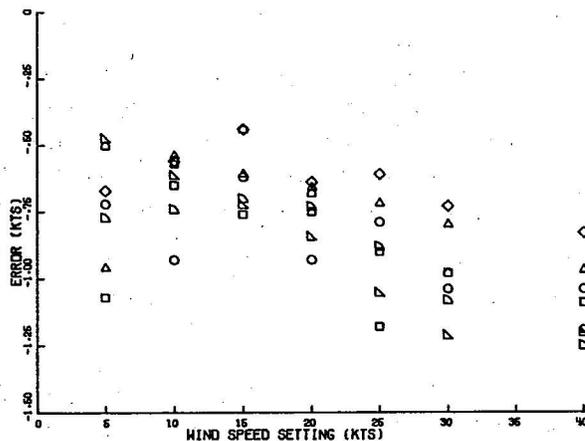


Figure 11. Deviations in aerovane wind speed output from indicated true tunnel speed. (Symbols represent different aerovanes.)

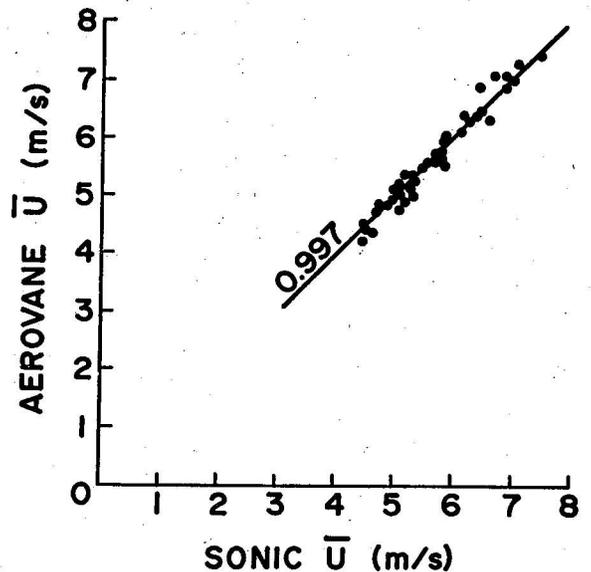


Figure 12. Comparison of sonic anemometer and aerovane (wind speed). Scatter coefficient indicated.

4.5 Vertical Velocity

R. M. Young Model 1200 propeller anemometers are used to measure the vertical wind speed at 26, 177 and 444 m. The data are recorded both digitally on magnetic tape and on strip charts. Output from the instrument is tested on the ground and on the tower with a fixed rpm motor for clockwise and counter-clockwise rotation. Since the transducer is not adjustable, velocities are linearly scaled for each instrument by determining a sensitivity constant. Full-scale values are $\pm 0.500 \text{ V} \pm 0.003 \text{ V}$ at 1800 rpm (11 m sec^{-1}). The anemometer is vertically oriented by a carpenter's level.² Deviations of up to 3° from the vertical can be expected.

4.6 Pressure

Surface pressure is measured using the Belfort Model 6069 aneroid barometer mounted in a ventilated instrument rack in the transmitter building. The sensor is calibrated against a conventional mercury barometer. As with other aneroid barometers, tapping the instrument helps overcome effects of dead band and hysteresis. To do this during routine data collection, an automatic tapping

²This alignment procedure is not completely satisfactory. The alignment can only be made by eye and with the boom pulled in from its normal position. Remote electronic leveling will be used soon.

tapping device was designed and installed. The tapper strikes the top of the instrument box once each minute. During rapid pressure changes, sudden jumps in the data are detectable at sampling rates less than 1 min.

4.7 Rainfall

Rainfall is measured with Belfort Model 5-780 single traverse instrument located 75 m northwest of the tower. The chart recording mechanism has been removed and replaced by a gear train driven transducer. The transducer output is linearly proportional to the amount of rainfall. The raingage is calibrated before the start of the season using weights equivalent to 1 inch of rain per weight. Accuracy is roughly ± 0.05 inch.

4.8 Signal Conditioning Apparatus

Figure 13 is a block diagram of Digi-Data, Inc. signal conditioning equipment used at the tower. Forty channels of data, written in an IBM-compatible format at 200 bpi, are recorded sequentially in two 20-channel blocks (e.g., in a 10-sec sampling mode; alternate sets of 20 parameters are sampled every 5 sec). Each data channel is digitized in a three-bit BCD word and each record is 76 characters (bits) including "housekeeping" information (Carter, 1970). An electrically operated digital clock is an integral part of the data formater (not shown in Fig. 13). Because AC power interruptions recycle the clock, a battery powered digital clock will be installed in 1973.

5. DATA COLLECTION PROGRAM DURING 1972

During 1971, data were collected on magnetic tape on storm days and suspected storm days. Since no serious problems were encountered in 1971, it seemed feasible to collect at least 2 mo of "continuous" data in the spring of 1972. Significant differences between sporadic and continuous data operation programs were soon obvious. They involved problems of data handling, manpower, and routine preventive maintenance (Sec. 7). Despite a small computer and a limited staff, data handling improvements were made over previous years. For example, turnaround time for archiving ranged from 54 hr to 14 days in 1972, with about a 10-day average. This compares favorably with the 7 to 9 mo turnaround time in 1970 and the 4 to 6 mo turnaround time in 1971. Preventive maintenance was important but often could not be performed because of continuous data requirements. Toward the end of the spring season, this factor caused some mechanical failures serious enough to force a lengthy shutdown of the tower equipment facility, which of course, left large gaps in the data set (Sec. 9).

Ice, snow and cold weather restricted tower work between 15 November and 15 March. However, to catch significant storms the tower facility had to be operational before 15 April. This means that between 15 March and 15 April time and the weather are critical elements. In 1972, the tower was operational 2 days before the proposed seasonal deadline. Data collection proceeded smoothly for about 5 weeks. Only relatively minor problems with the reference thermistor and the vertical velocity sensors were encountered (see Sec. 6). On 27 May, during a severe thunderstorm, lightning caused a failure of the signal conditioning equipment and thereafter, problems with the recorder and other components persisted for about 1 mo.

In mid-June, we believed that convective activity might continue a few more weeks and decided to continue collecting data one more month. The forecast proved accurate; from 27 June to 3 July three significant storms occurred. The "spring" program was terminated on 12 July, but the tower operation continued for some time at the request of the University of Oklahoma Meteorology and Electrical Engineering Departments as part of their acoustic radar program.

6. MAINTENANCE PROCEDURES

For the first 2 mo, the following equipment was checked daily: the digital and analog recording systems, power supply and amplifier calibration voltages, and sensor output. After the equipment proved stable, checking was reduced to two or three times weekly. The routine included checking the digital recorder for power failures, and setting the digital clock to WWV time. The channel recording sequence was checked. If any malfunction had occurred, it was logged and the system corrected before a new tape was loaded. Usually the time required to change a tape was 10 to 15 min. However, when the system required a complete check-out, delays of over an hour resulted. In normal operation, a tape lasted 6 days at a 1-min sampling rate and about 27 hr at a 10-sec rate.

The analog strip chart recorders were checked for possible internal failures and for possible sensor malfunction. Time registration marks were entered on each chart. The horizontal wind charts advanced 3 inches per hour and required changing every 2 wk. The vertical velocity sensors were recorded at 8 inches per hour and charts were changed every 3 1/2 to 5 1/2 days depending upon the type of recorder used. Temperature data were not recorded on analog strip charts because the recorders overloaded the circuitry.

Power supplies for the raingage, microbarometer, ambient, delta, and wet-bulb temperature circuits, and two amplifiers in the digital system were checked daily. Table 1 shows the calibration voltages and typical corrections for the power supplies and amplifiers. Mechanical linkage in the raingage was characterized by a large dead band near zero output. This required adjustment each time the rain bucket was emptied.

Wet- and dry-bulb temperatures were read daily. For the dry-bulb output, the delta system was checked against the ambient system by comparing the 26 m delta temperature to the computed difference between the 444 m and the 26 m ambient temperatures. Possible bad data produced by the wick drying on the wet-bulb probe was checked by noting the behavior of vertical profiles and by checking the 1200 GMT Tinker Air Force Base rawinsonde observation. The wet-bulb water reservoirs (~ 1 liter capacity) required refilling every 1 to 2 wks.

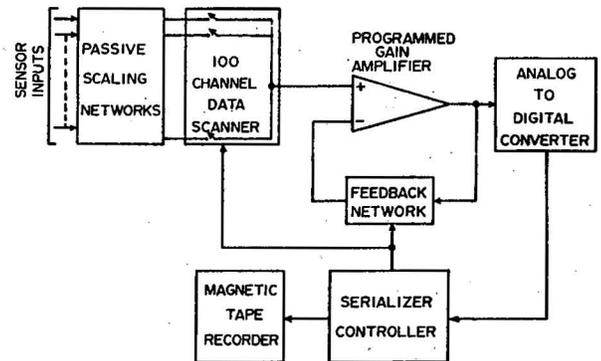


Figure 13. Signal conditioning system block diagram.

Table 1. Sensor Circuit Calibration Voltages and Corrections.

<u>SENSOR CIRCUIT</u>	<u>CALIBRATION (V)</u>	<u>TYPICAL CORRECTION (V)</u>
<u>Temperature</u>		
Ambient Dry	1.4715	+ 0.001
Ambient Wet	1.4715	+ 0.001
Delta Dry	1.4715	+ 0.001
<u>Pressure</u>	10.80	None
<u>Raingage</u>		
Dry Bucket Before Rainfall	1.00	None
Dry Bucket After Rainfall	1.00	+ 0.05
<u>Amplifier</u>		
Gain of One	3.60	+ 0.01
Gain of Ten	5.00	+ 0.02

7. PROBLEMS IN DATA COLLECTION

Problems associated with the tower data collection program divide into two groups: those due to location or environment of the data acquisition equipment and those due to electronic malfunction or breakdown. Three difficulties in location were identifiable. First, the remoteness of the site made it difficult to monitor the system. Since no direct linkup of data transmittal between NSSL and the tower existed, and manpower limitations prohibited stationing personnel at the site, monitoring had been done only during maintenance checks and when storms threatened. Over 80% of the time the tower was unmonitored. Second, the tower being situated in rolling terrain produced evidence of nearby natural (and unnatural) obstacles in the data. Third, cold and/or windy weather frequently prevented staff members from working on the tower. With a temperature of 0C and a 10 m sec⁻¹ wind, it is impossible to work bare-handed for more than a few minutes. Thus, a problem needing repairs had to wait for favorable meteorological conditions.

Unlike other tower facilities where data are generally collected under "ideal" conditions, NSSL collects data primarily during adverse weather with increased risk of instrument failure. The vertical velocity sensor is most susceptible to direct damage from high winds and hail; the light polystyrene

propeller blades break rather easily. Furthermore, high winds occasionally tilt the axis of the sensor away from the vertical (see Sec. 8). Elderkin et al. (1972) found that an error in orientation of as little as 1° produced significant errors in their data. High winds also prevent necessary repairs on occasion. Replacing a broken anemometer propeller and replenishing the water supply of the wet-bulb sensor are typical repairs.

The digital data acquisition system was susceptible to disruption by lightning and power failures that caused the digital clock to malfunction. During most storms an attendant was present to reset the clock and mount a new tape if required. If power failures occurred during an unattended period, the accuracy of the recorded time was considered questionable. A more severe problem was traced to voltage transients that caused component failures. An amplifier failure on 27 May resulted in a 6 hr gap in the data. Moreover, voltage transients weakened other digital recorder components. Certain mechanical relays in the scanner, weakened in such a manner, produced intermittent errors. Another problem was aerovane direction synchros that were interfaced to the recorder through a 360° potentiometer. Because the potentiometer had a "dead" spot when the vane pointed due north, erroneous values were frequently recorded on tape. One interfaced potentiometer burned out in mid-season and was undetected for several days during an unmonitored period.

One unexpected error source occurred in the dry-bulb delta temperature system. After a month of operation we noted that the temperatures being recorded seemed biased by approximately -0.5°C . A thorough check showed that a resistor in the thermistor probe had malfunctioned. To minimize the disruption to data collection, another thermistor in a new shield was mounted adjacent to the old instrument. (Post-season calibration indicated that the voltage output for the problem thermistor had shifted an equivalent of -0.5°C).

8. QUALITY CONTROL

8.1 General Statements

An important but often deemphasized step in data collection is quality control. Before the advent and extensive use of tape recorders, quality control was relatively simple though probably less effective. Making a few equipment checks and monitoring strip charts usually were enough to insure that outputs remained within desired tolerances.

Tape recorders are useful when large quantities of data are desired.³ Magnetic tape output implies "recording in the blind," that is, you cannot see

³ Output of a meteorological signal can be recorded on magnetic tape as a continuous frequency (analog) or incrementally as a binary or hexadecimal impression (digital). The signal of digitally recorded data has been passed through an A/D converter. These data may be processed immediately. The analog data must be passed through an A/D converter before computer processing commences.

what is actually recorded on tape until the tape is removed and listed. An important aspect of data archiving is to develop good quality control techniques that reveal data errors that cannot be seen by a visual scan of the tape listing. When the data set is small, only a desk calculator is necessary; however, collecting data with a tape recorder usually indicates a data set too large for only a calculator. Then a large-capacity digital computer is a necessity. Computer-based quality control takes time and effort to develop and employ. It should be used in as near real time as possible, so that problems can be detected quickly.

For practical purposes, recording should be by strip chart recorders as well as on magnetic tape. As a primary function these recorders provide a quick and easy check of gross features. Figure 14 (a, b, and c) illustrates equipment malfunctions easily detected by the trained eye from the strip charts: 14a, a vertical velocity sensor tilted from the vertical; 14b, the same probe with a broken propeller; 14c, vertical velocity output from a sensor with a faulty bearing. Figure 14 (d and e) shows the expected vertical velocity trace during turbulent and quiescent periods.

At the NSSL tower facility, most signals are recorded on strip chart paper before being recorded on magnetic tape. There is one limiting factor to this procedure. If the signal is weak, a low impedance strip chart recorder may load the circuit enough to create a significant voltage drop. Therefore, during 1972 the temperature strip chart recorders were not used.

Some problems are best detected with specialized quality control routines. The sophistication of the routine is limited by the size of the available computer. For the 1971 and 1972 data collection programs, the size of the readily available computer (IBM 1620) was a restrictive factor.⁴

During both seasons, the same quality control techniques were used. All profiles from the NSSL site were compared with those expected under conditions of a neutrally stratified stationary boundary layer and locally homogeneous terrain. The well-mixed, homogeneous boundary layer will be called the control condition. Lumley and Panofsky (1964) provide information on the behavior of the lower 150 to 200 m of the planetary boundary layer under control conditions. The atmosphere above 200 m is not adequately parameterized, although intelligent guesses may suffice for quality control.

8.2 Quality Control to Determine Deviations from Gross Features

The simplest of all quality controls involves determining the mean. The mean wind speed, wind direction, and temperature were computed and plotted in vertical profiles. Below 100 m, the wind speed profile is logarithmic in neutral conditions (Tennekes, 1973). Above 100 m, the wind speed generally increases slowly with height up to 355 m, then is either constant or decreases

⁴NSSL now has a System Engineering Laboratory Model 8600 computer.

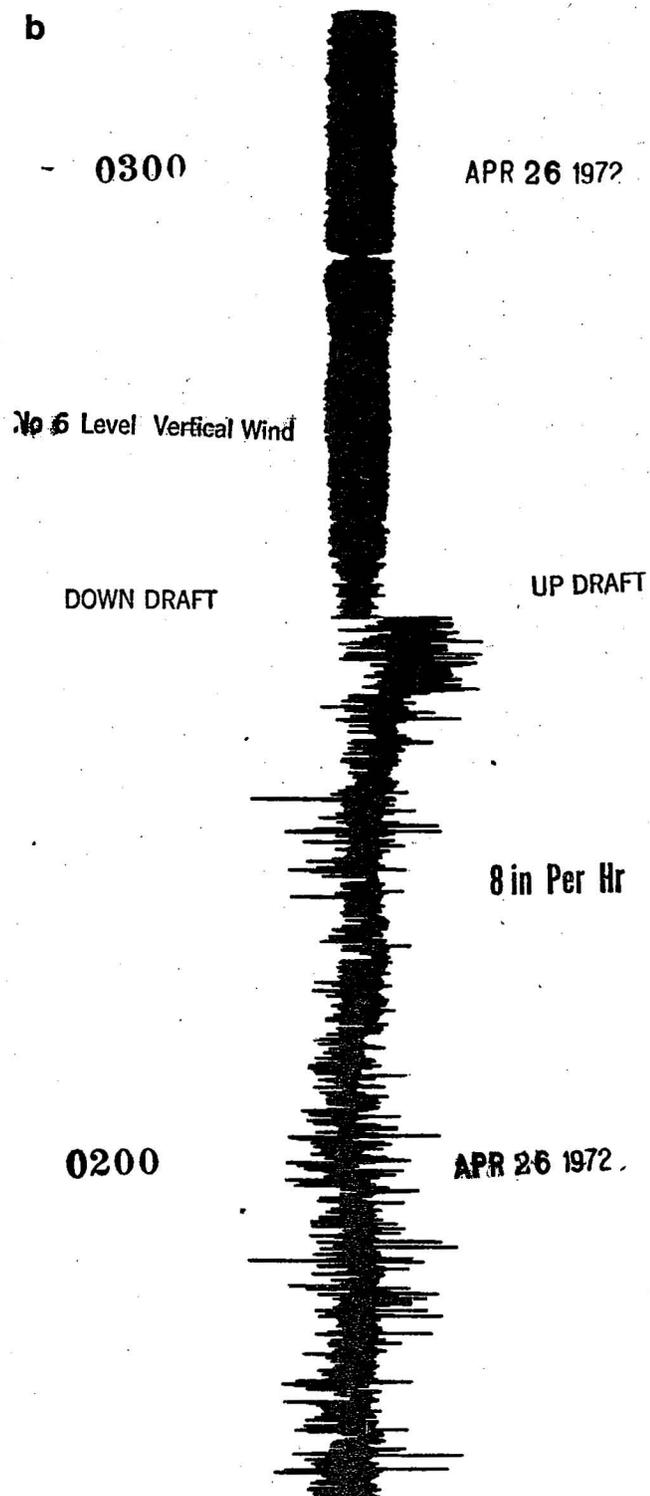
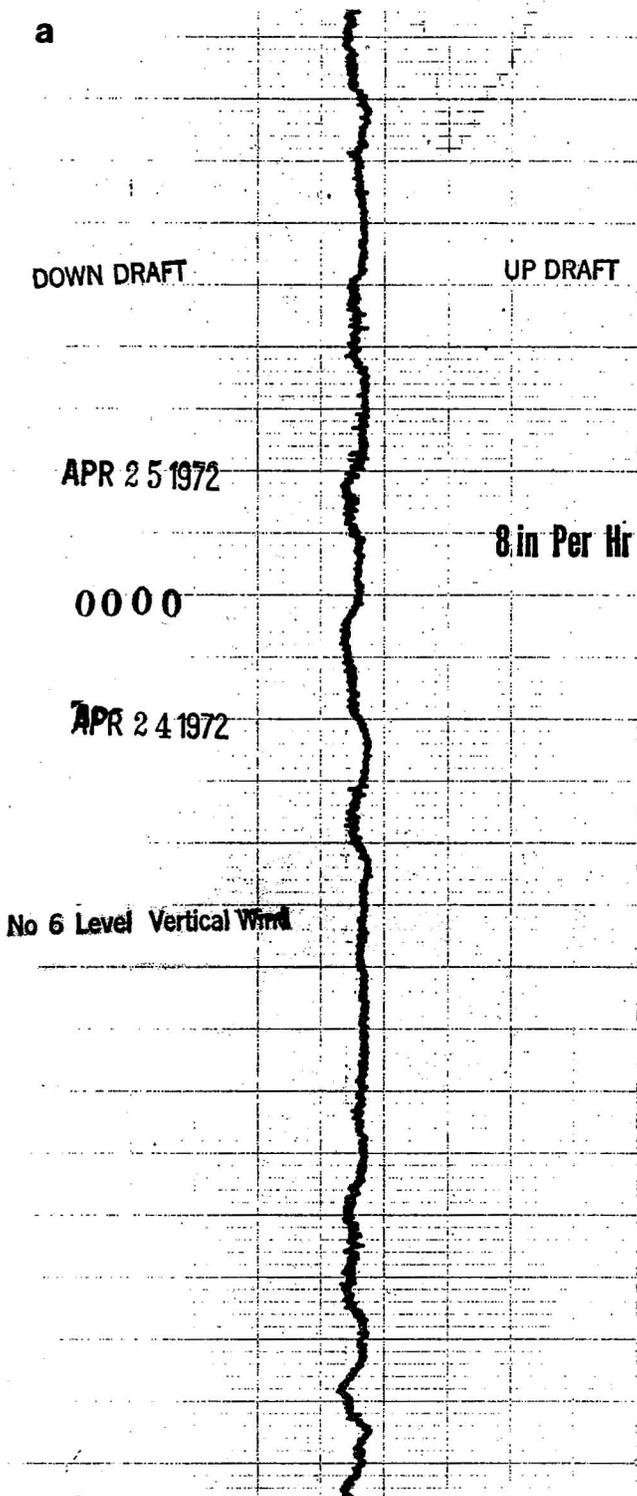


Figure 14. Strip chart data of vertical velocity showing (a) biasing due to improper alignment, (b) broken propellor blade, (c) faulty bearings, (d) normal turbulent periods, (e) normal quiescent periods.

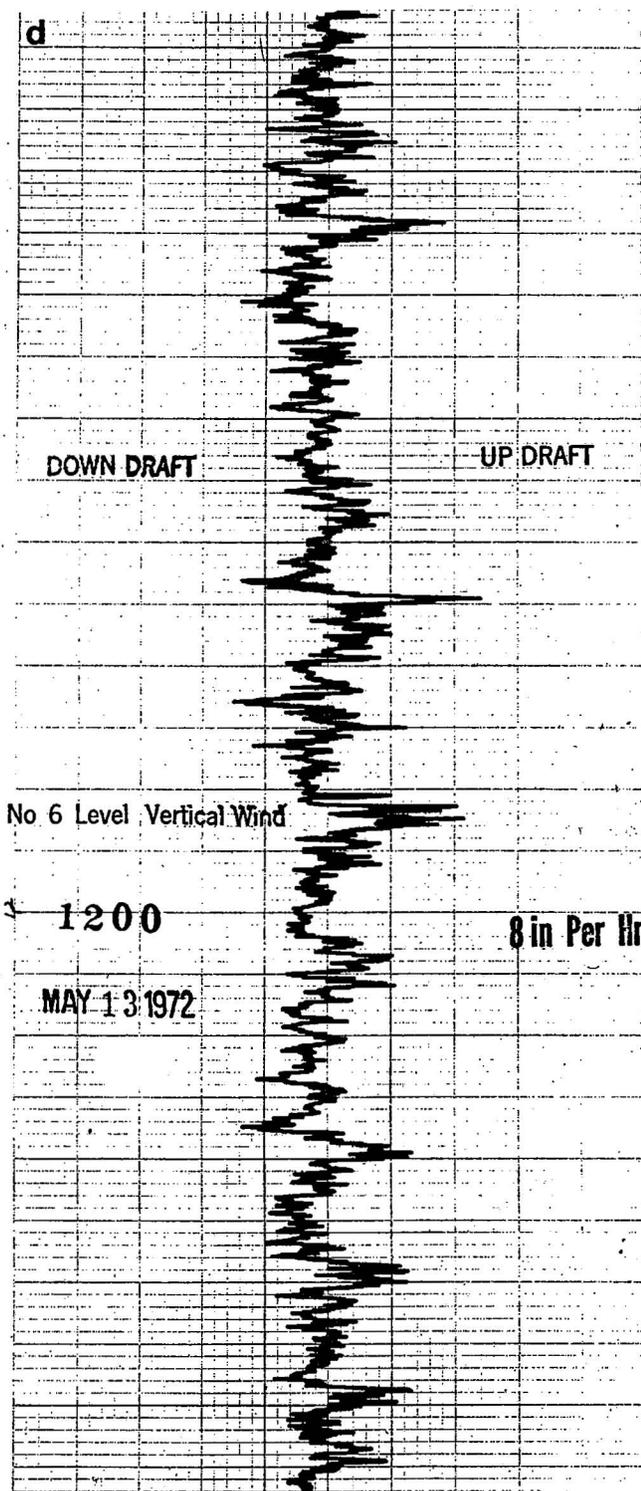
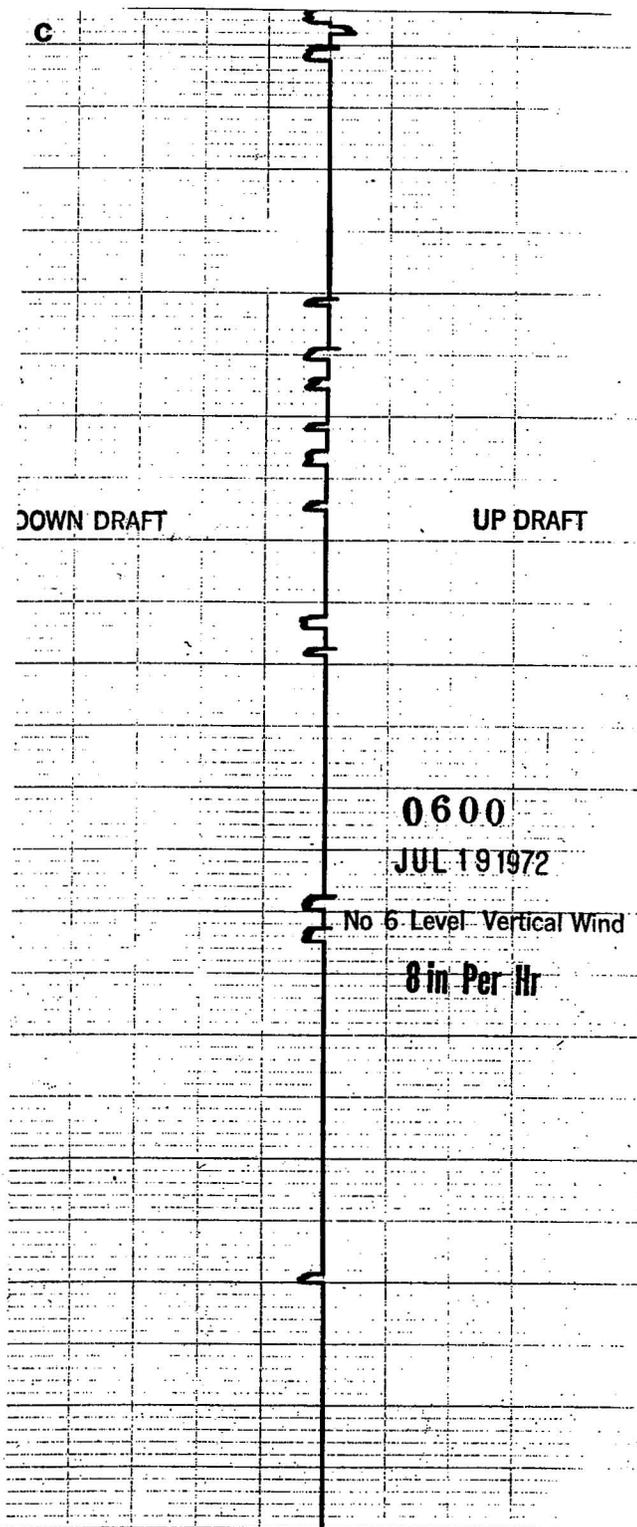


Figure 14c. faulty bearings

Figure 14d. normal turbulent periods

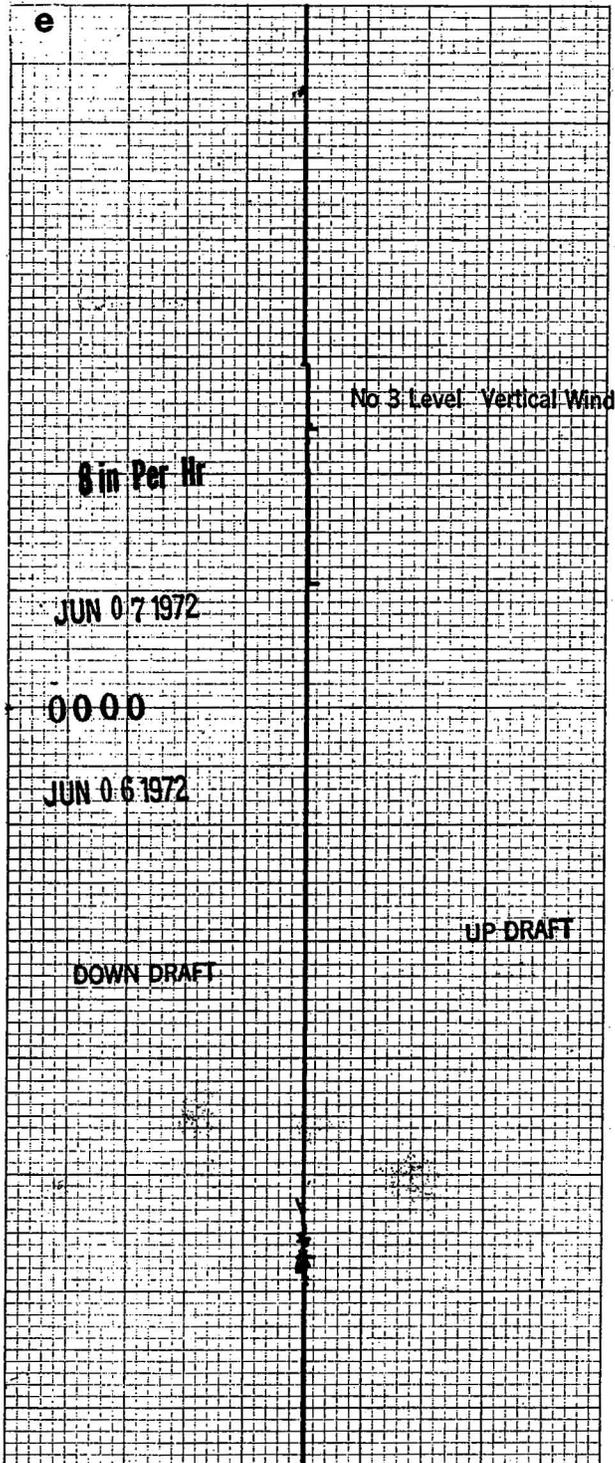


Figure 14e. normal quiescent periods

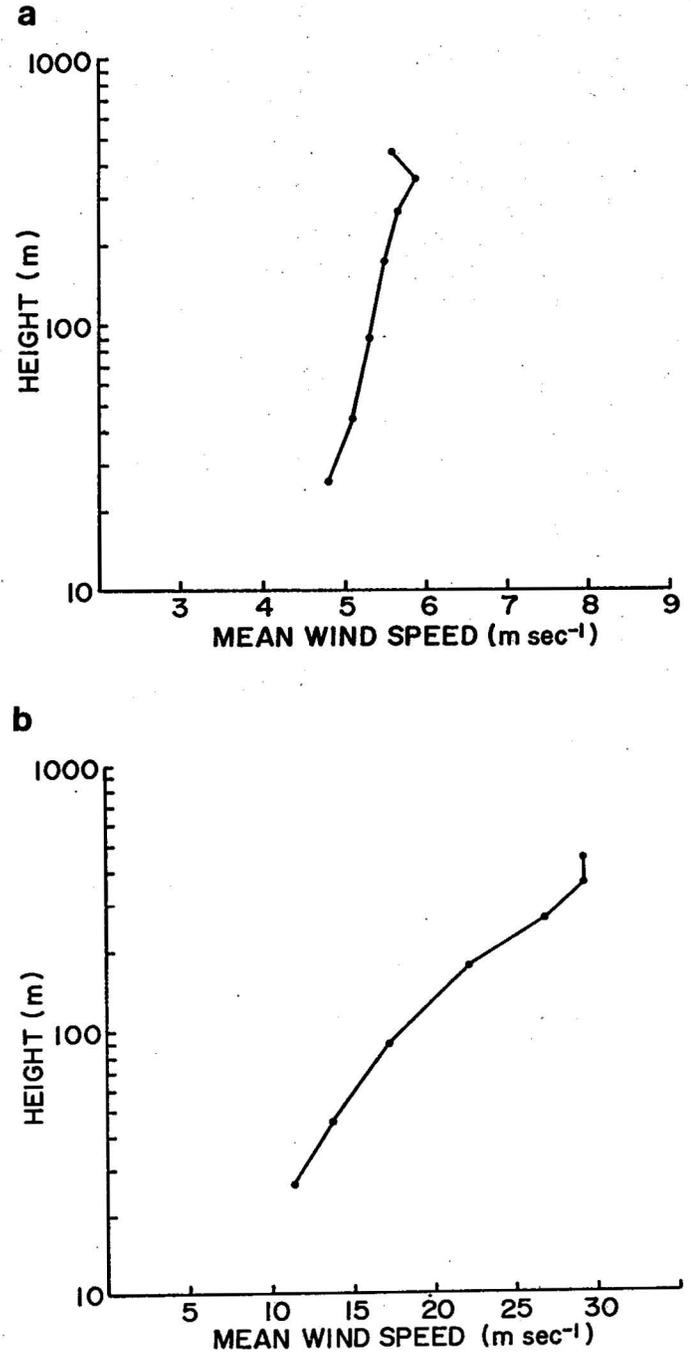


Figure 15. Representative average wind speed profiles on (a) low shear and (b) high shear days.

up to 444 m.⁵ Inflection points at lower levels may exist but should not be prominent. If small inflection points appear, they may be due to instrument error but also can be explained theoretically (Peterson, 1972) as evidence of internal boundaries caused by heterogenous terrain. Thus, for quality control, we are concerned with only gross features of the mean wind profile. Figure 15 (a and b) represents averaged (hourly) wind speed profiles on low-shear and high-shear days, under near-neutral conditions.

Generally, the wind direction veers with height up to the gradient wind level, approximating the Ekman spiral. The wind direction instrument includes two sets of synchros that reduce sensor accuracy. Figure 16 (a and b) shows two averaged (hourly) typical wind direction profiles under similar meteorological conditions. The consistently wavy profiles look suspicious, but cannot be improved because they remain within instrument tolerances.

The mean temperature profile is more reliable as a quality check than are the profiles of other parameters. On clear days, especially after a cold front passes, the boundary layer has a very steep unstable lapse rate near the ground, approaches the dry adiabatic rate near 100 m and is nearly dry adiabatic above 100 m (Goff and Hudson, 1972). Figure 17 is a typical profile. Small errors can be detected if a profile differs from Fig. 16 during control conditions.

The mean vertical velocities were computed only to check whether they differed significantly from zero, especially at the lower levels. Other quality control techniques described below are more useful for the vertical velocity.

Usually the wet-bulb depression decreases slowly with height in a well-mixed atmosphere. The profile shape is not generally known in control conditions, so subtle errors are not detected.

The standard deviation of the wind speed σ_U is useful in detecting certain kinds of errors in digital data. Figure 18 suggests that the profile is logarithmic in the tower layer. On days when the profile appears to be smooth, one can use σ_U for checking the bearings in the propellor mechanism. The output from an aerovane with such a problem will have comparatively low σ_U (444 m, Fig. 19).

The behavior of the standard deviation of wind direction σ_α is similar to that of σ_U , but in the tower layer σ_α is much smoother than σ_U if the layer is vertically homogeneous, and thus better indicates faulty equipment. Figure 20 is a typical profile σ_α .

⁵The decrease of wind speed above 355 m may be caused by the low-level jet (Blackadar, 1957), but the phenomenon appears consistently in all profiles (Crawford and Hudson, 1970). The decrease of the wind from the next to the highest to the highest level was observed on the much smaller 150 m Cape Kennedy meteorological tower (Fichtl, personal communication).

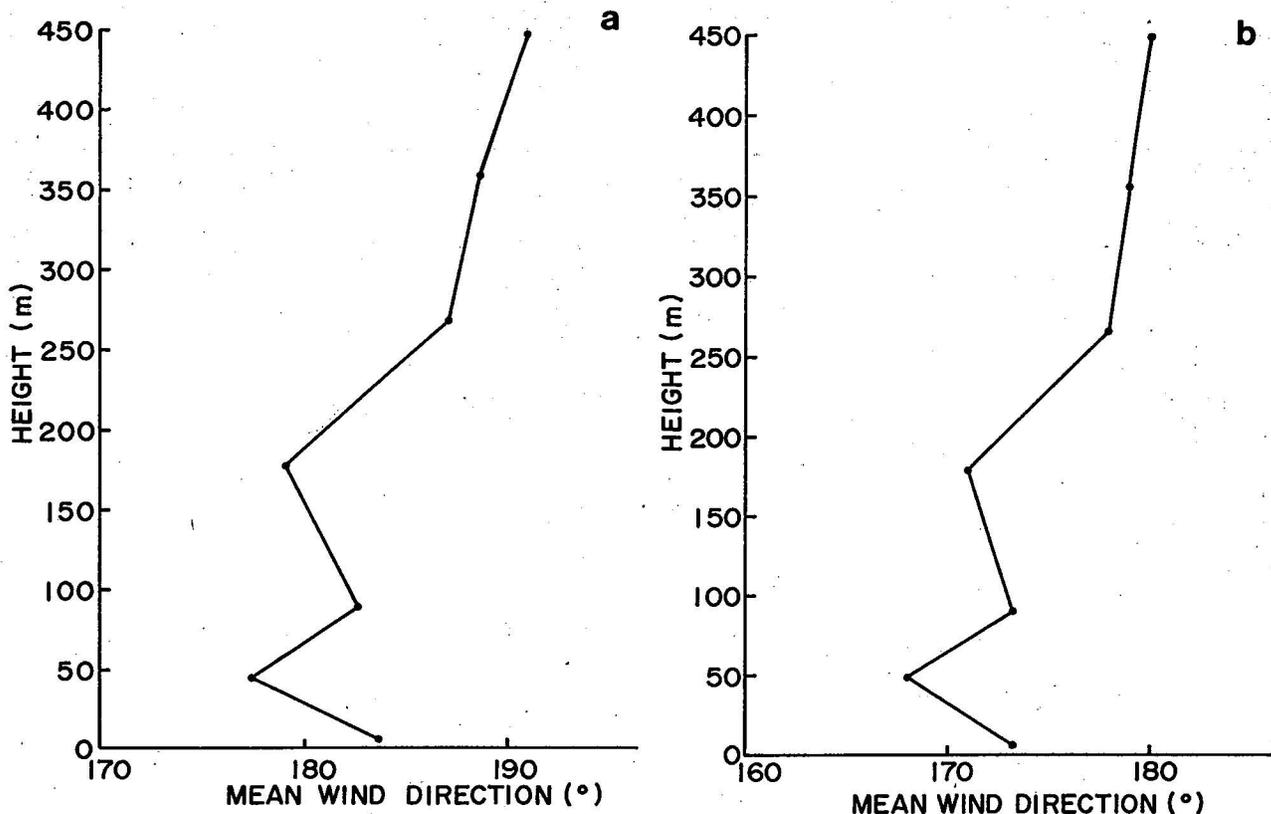


Figure 16. Representative average wind direction profiles on (a) low shear days and (b) high shear days.

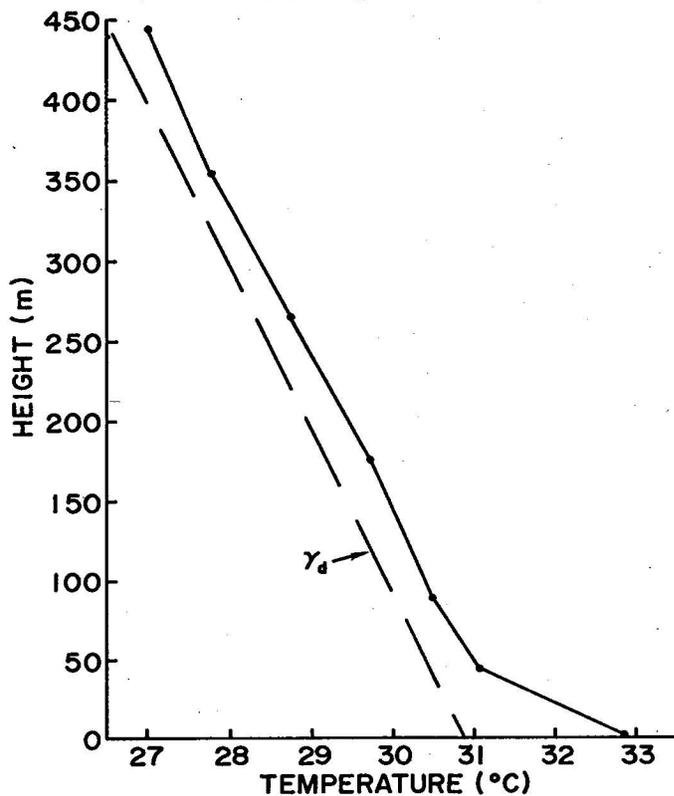


Figure 17. Typical average temperature profile. Dry adiabat (γ_d) indicated.

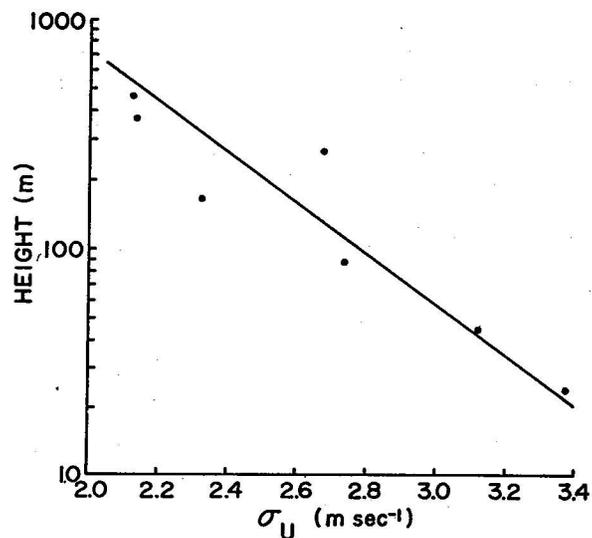


Figure 18. Typical σ_U pprofile.

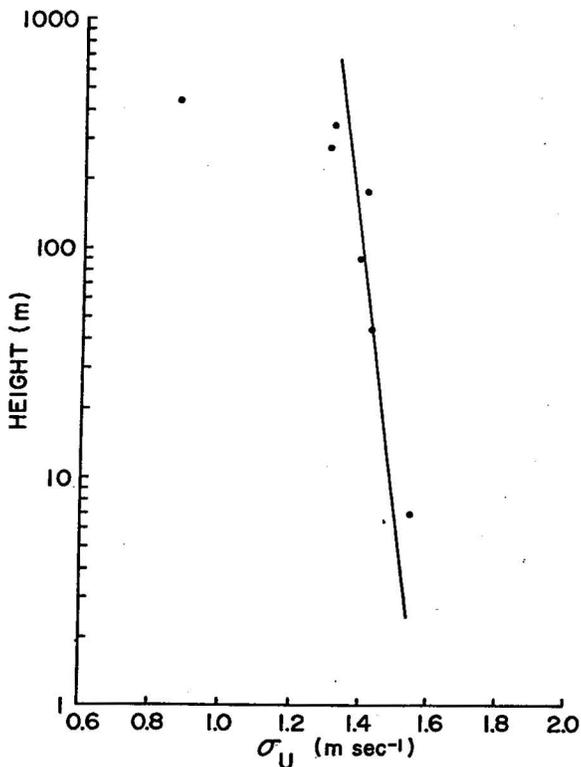


Figure 19. Anamolous σ_U profile.

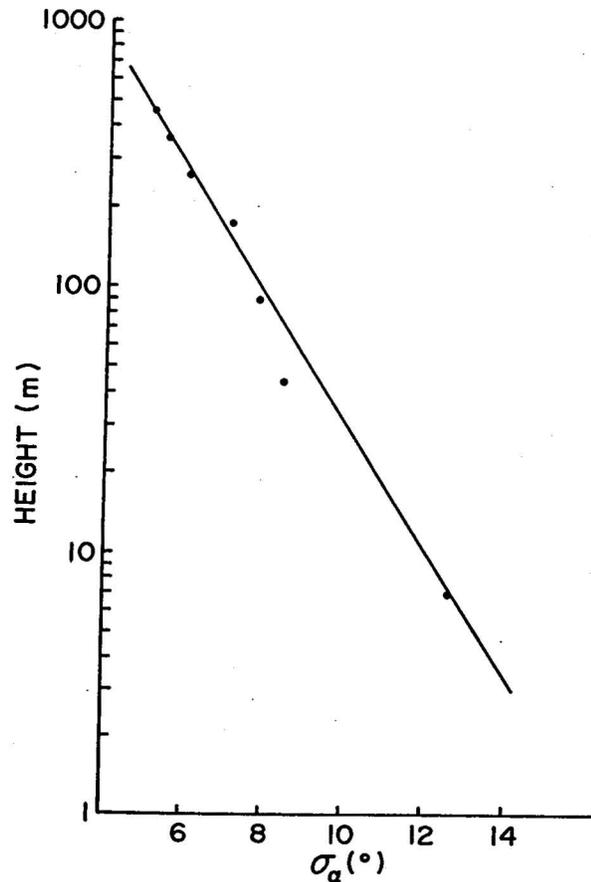


Figure 20. Typical σ_α profile.

Temperature sensors used by NSSL are not sensitive to frequencies above about 0.02 Hz. If the sampling interval is 10 sec, we expect the standard deviation of temperature (σ_T) to be small. It was observed that σ_T decreased approximately linearly with height under control conditions. Deviations from the expected profile were noted and investigated further. Fig. 21 is an example of a σ_T profile when relays in the data acquisition system were not functioning properly.⁶ Notice that σ_T for the 2 and 90 m levels is comparatively large.

8.3 Quality Control for Infrequent Transients

Up to now, only the simplest of quality control techniques have been described. Although the mean and standard deviation are useful quality control parameters, they are not conclusive. The mean is helpful in detecting bias type errors. Large and frequent, but sporadic, errors are better detected by the standard deviation parameter and techniques to be explained shortly. When equipment failures occur less frequently or the output has sporadic discrepancies of small magnitude, some quality control technique must be used to isolate bad data rather than to integrate it with the whole sample. Two

⁶In 1970 two temperature sensors were located at 2 m; there were no sensors at 26 m.

simple techniques give the desired results. In one technique, a wind time series is chosen and σ_U and σ_α computed. It is believed that given control conditions, the absolute value of the maximum fluctuation of either parameter will be a function of σ only. In fact, Fig. 21 demonstrates that $|\Delta U|_{\max}$ is proportional to σ_U , or

$$|\Delta U|_{\max} = C_1 \sigma_U \quad (2)$$

where

$$\Delta U = U_{t+1} - U_t, \quad t = 0, 1, 2, \dots, N$$

and N is the sample size. The slope of the best fit linear curve in Fig. 22 indicates that the dimensionless constant (C_1) in (2) is 3.2 for the aerovane and for sampling rates of 10 sec. The "constant" varies for instruments of different sensitivity, and for different sampling rates. The constant appears to be an implicit function of height and time only, that is,

$$C_1 = C_1 [\sigma_U(z, t)] \quad (3)$$

with the stipulation that the sampling rate remains constant for a given sensor. We have not determined C_1 for other instruments or sampling rates.

There is an analogous relationship between the wind direction (α) and σ_α . For a time series of size N ,

$$|\Delta \alpha|_{\max} = C_2 \sigma_\alpha, \quad (4)$$

where

$$\Delta \alpha = \alpha_{t+1} - \alpha_t, \quad t = 0, 1, 2, \dots, N.$$

C_2 in (4) was determined to be 4.0 by fitting a linear curve to a scatter diagram of Fig. 23. Notice that at high σ_α , the relationship does not appear

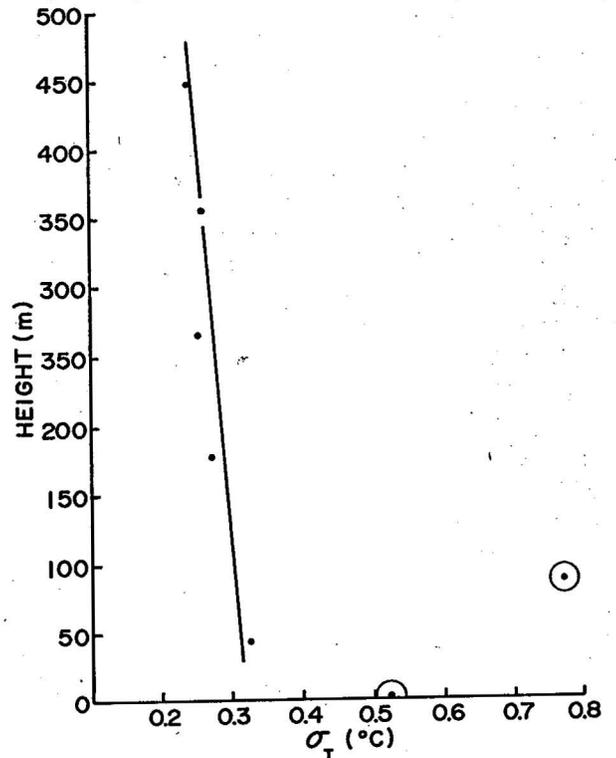


Figure 21. Anamolous σ_T profile (defective thermistors: 2 and 90 m).

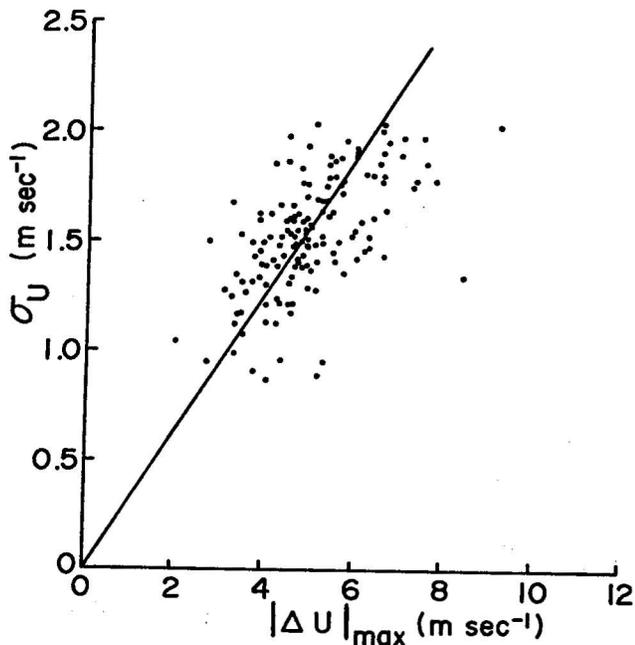


Figure 22. Comparison of $|\Delta U|_{\max}$ with σ_U .

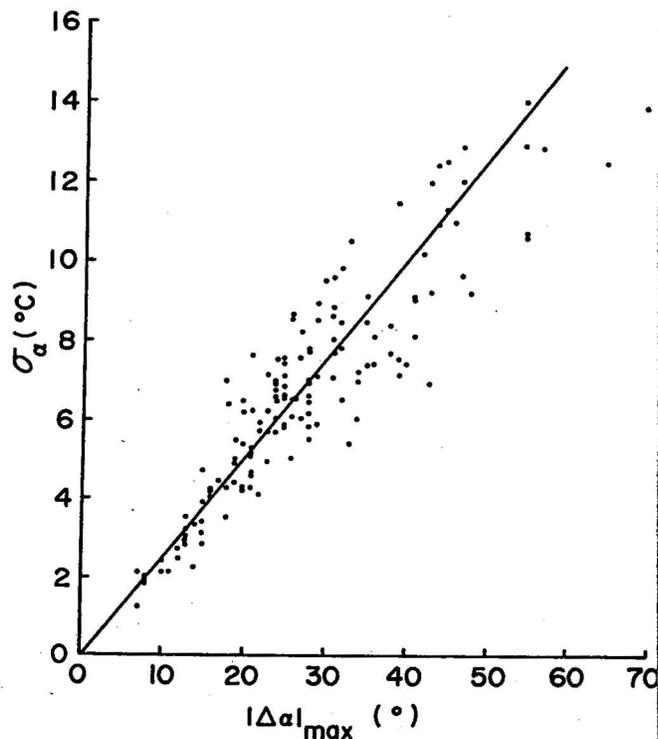


Figure 23. Comparison of $|\Delta \alpha|_{\max}$ with σ_α .

to be linear. C_2 also obeys a relation like (3).

With the constants C_1 and C_2 determined for the control data sets, we can use them as quality control parameters for subsequent data sets. We need only determine the standard deviation of the wind speed and stipulate that $|\Delta U|$ not exceed $C_1\sigma_U$ (analogously for wind direction, i.e., $|\Delta \alpha| \leq C_2\sigma_\alpha$).

This technique was used with success for the wind speed and direction, but it was used cautiously on the temperature data.⁷ It was not useful for any type of data during thunderstorms, frontal passages, or other phenomena exhibiting unsteady characteristics.

Another simple quality control procedure was the frequency distribution. For example, for the wind speed time series, ΔU was determined and compiled in a distribution over several small intervals. ΔU was chosen instead of U because the range is smaller. Distributions also were determined for $\Delta \alpha$, ΔT

⁷ There is no simple relationship between $|\Delta T|_{\max}$ and $\sigma_T|\Delta T|$. $|\Delta T|$ may have the same relative magnitude in stable and unstable conditions because (1) in stable conditions the sensor may be influenced by large amplitude, long period gravity wave type oscillations and, (2) in unstable conditions may be influenced by high frequency turbulent fluctuations, albeit the sensor will not respond to the full amplitude of the turbulent eddy if the frequency is high.

and w or Δw . In each case, the distributions should have a bell shape, although they need not necessarily be Gaussian. Bimodal, skewed or other unusual distributions in control conditions were investigated for instrument failure.

8.4 Additional Quality Control Techniques

Quality control is an integral part of the archival procedure of a typical tower data set. Data collected on magnetic tape have units in volts and must be converted to meteorological units. In some cases, the constant of proportionality is unity, and in other cases the factor differs from unity and must be determined in calibration. For temperature data, corrections are non-linear (see Sec. 4). Before correction, the raw data are checked by appropriate quality control techniques. Bad data are marked and logged (see Sec. 9). During the archival process, some additional quality control is done to check for particular problems that otherwise would not be handled. These controls are:

- (1) Check and indicate tape channel shifts,
- (2) Wind speed: `IF(SPEED.LT.0) SPEED=0,`
- (3) Wind direction:
 - (a) `IF(DIR.GT.360) DIR=999`
 - (b) `IF(DIR.LT.0) DIR=888`
 - (c) `IF(SPEED.EQ.0) DIR=0`
 - (d) `IF(DIR.EQ.0) AND SPEED.GT.0) DIR=360,`
- (4) Raingage:
 - (a) `IF(RAIN.LT.0) RAIN=0`
 - (b) `IF(RAINI.LT.RAINI-1) RAINI=RAINI-1,`
- (5) Check and indicate deviation from specified calibration voltages,
- (6) Check difference between 26 m thermistors (see Sec. 4).

Data archiving was beyond the capability of the IBM 1620, so the University of Oklahoma's IBM 360/50 was used.

The quality control procedures described are adequate only for the instruments, sampling rates, type of meteorological facility, and computer specified. More sophisticated techniques can be used, and in some cases should be used, for the more sophisticated instruments and faster sampling rates if an adequate computer is available.

9. SUMMARY OF AVAILABLE DATA

9.1 Digital Data

The digital data collected during the 1972 storm season are archived on 2400 ft reels of 1/2 inch seven-track tape at 556 BPI even parity. Each record contains 133 characters, and each archived data tape averages over 20,000 records. Table 2 shows the output format for the consolidated data with sample printout of the data in Fig. 24.

Table 3 represents a user's guide to the 1972 data in a coded format. Each entry indicates a change in the status of the data either in the sampling rate, reliability, or continuity of the data. Starting and ending dates and times for which the status of the data is unchanged. The sampling rate in records per hour is also given. Each parameter is indexed from 01 to 33 (Table 4) and the status categorized as follows:

- 0 - Data Reliable (no errors were detectable and no problems known to exist).
- 1 - Data Unreliable (data are unusable and may be denoted by 9's on the archived tape).
- 2 - Data Suspect (a small error is suspected in the data, but evidence is inconclusive).
- 3 - Data Unreliable in part (intermittent errors occur but the data are otherwise reliable).
- 4 - Channel Shorted.

In Table 3 data gaps (minutes) are indicated on the right.

There are several major problems which appear in Table 3: approximately every 10 days maintenance personnel were on the tower to refill the wet-bulb water reservoirs (coded unreliable); the 444 m vertical velocity is coded unreliable in part at the beginning of the data set because of faulty orientation; a system failure on 27 May rendered a large body of data unreliable or unreliable in part; and, no data were collected on channel 24, for the entire season.

Breaks in the data comprise 3.85% of the 90-day sample. Table 5 shows the quality of available data in percent by parameter and Table 6, the overall quality of the data. A resume of digital data on magnetic tape for 1969 through 1971 is given in Appendix A.

Table 2. 1972 Consolidated Tower Output Format.

COLUMN	DATA	UNITS	FORMAT
1-6	Date	MMDDYY	I6
7-12	Time	HHMMSS	I6
13-36	Wind Speeds Levels 0-6,6F	m/sec	8I3 - XX.X
37-57	Wind Directions Levels 0-6	degrees	7I3 - XXX.
58-93	Temperatures Levels 0-6,6F	C	9I4 - XX.XX
94-105	Wet Bulb Temperatures Levels 0,3,6	C	3I4 - XX.XX
106-121	Gill Vanes Levels 0,3,6,6F	m sec ⁻¹	4I4 - XXX.X
122-125	Pressure Level 0	mb	I4 - XXX.X
126-125	Rain Gage Level 0	inch	I3 - X.XX

DATE	TIME	WIND SPEEDS						WIND DIRECTIONS						GILL VANES						
		0	1	2	3	4	5	6	6F	0	1	2	3	4	5	6	0	3	6	6F
52472	81400	2.0	00.8	1.0	03.2	7.6	07.0	4.9	04.6	80	88	96	114	92	91	104	-3	1.1	.2	.0
52472	81500	2.4	02.6	2.4	04.4	7.4	07.4	4.8	04.7	93	89	111	108	93	90	104	-6	-1	.2	.0
52472	81600	1.4	01.2	1.9	04.9	6.9	07.4	5.0	04.7	72	98	104	100	93	89	104	.1	.2	.1	-.2
52472	81700	2.1	02.1	3.3	05.1	6.9	07.4	5.2	04.9	109	92	95	103	95	90	104	.0	.0	.0	-.1
52472	81800	2.4	02.6	3.4	04.9	6.9	07.1	5.0	04.8	108	107	101	105	100	91	104	.5	.0	.2	-.1
52472	81900	2.4	01.8	2.9	05.2	6.9	06.7	4.8	04.5	103	92	112	108	100	94	104	.4	.0	.4	.1
52472	82000	2.7	01.7	3.2	04.4	7.5	07.0	4.8	04.6	95	112	121	107	94	95	104	-1	.1	.3	.2
52472	82100	1.8	01.5	2.4	04.6	7.5	06.9	4.9	04.7	92	97	117	108	93	94	105	.4	.7	.3	.1
52472	82200	1.9	02.8	1.3	03.0	7.3	07.3	4.9	04.6	103	97	120	99	96	93	106	.5	.0	.3	.1
52472	82300	1.8	02.2	2.7	04.6	6.8	07.5	4.8	04.6	94	106	105	98	95	92	106	.3	.7	.4	.3
52472	82400	3.0	03.3	3.3	04.6	7.2	07.1	4.6	04.4	100	102	120	110	99	95	107	.2	.1	.2	.0
52472	82500	1.9	03.2	3.3	03.9	7.1	06.9	4.7	04.4	120	102	108	108	98	94	108	.1	.1	.4	.1
52472	82600	3.1	03.0	3.7	03.0	7.2	07.1	4.8	04.7	112	105	115	123	100	97	108	.0	.4	.2	.1
52472	82700	2.4	03.3	3.8	04.7	6.8	07.2	4.9	04.7	112	113	111	112	98	94	117	-.6	-.2	.2	.0
52472	82800	3.7	03.8	3.8	05.5	6.8	06.0	4.6	04.4	133	122	102	110	96	102	111	.2	-.9	.5	.1
52472	82900	3.9	03.2	3.3	03.7	5.0	07.4	4.7	04.6	90	98	101	116	91	97	111	.9	1.1	.3	.1

DATE	TIME	TEMPERATURES						WET BULB TEMPERATURE			PRESSURE		RAIN		
		SA	0	1	2	3	4	5	6A	6F	0	3			
52472	81400	21.58	21.13	20.05	20.34	19.91	20.30	20.51	21.68	99.99	15.89	13.04	10.99	971.9	.00
52472	81500	21.48	21.12	20.95	20.39	20.01	20.22	20.38	21.68	99.99	15.78	13.63	11.10	971.9	.00
52472	81600	21.58	21.17	21.04	20.46	20.08	20.10	20.15	21.58	99.99	15.99	13.23	11.10	971.9	.00
52472	81700	21.68	21.26	21.08	20.63	20.22	20.10	20.29	21.58	99.99	15.58	13.43	11.10	971.9	.00
52472	81800	21.78	21.43	21.19	20.75	20.21	20.10	20.25	21.58	99.99	15.58	13.53	11.10	971.9	.00
52472	81900	21.88	21.47	21.26	20.69	20.28	20.06	20.37	21.58	99.99	15.58	13.33	11.10	971.9	.00
52472	82000	21.88	21.39	21.22	20.70	20.17	20.01	20.40	21.58	99.99	15.58	13.63	11.10	971.9	.00
52472	82100	21.88	21.38	21.19	20.69	20.12	20.02	20.33	21.58	99.99	15.58	13.84	11.10	971.9	.00
52472	82200	21.88	21.43	21.20	20.70	20.03	20.01	20.21	21.58	99.99	15.68	14.24	11.10	971.9	.00
52472	82300	21.98	21.40	21.25	20.75	20.07	19.93	20.11	21.58	99.99	15.78	14.04	11.10	971.9	.00
52472	82400	22.08	21.56	21.37	20.84	20.18	19.82	20.28	21.68	99.99	15.58	14.04	11.10	971.9	.00
52472	82500	22.08	21.63	21.44	20.84	20.09	19.87	20.31	21.68	99.99	15.68	14.34	11.10	972.0	.00
52472	82600	22.18	21.64	21.44	20.90	20.14	19.80	20.36	21.68	99.99	15.48	14.04	10.99	972.0	.00
52472	82700	22.28	21.69	21.47	20.94	20.25	19.79	20.17	21.58	99.99	15.68	13.74	11.10	972.0	.00
52472	82800	22.28	21.79	21.54	21.03	20.35	19.89	20.71	21.68	99.99	15.38	13.84	11.10	972.0	.00
52472	82900	22.38	21.87	21.71	21.14	20.41	19.77	20.29	21.68	99.99	15.58	14.14	11.10	972.0	.00

Figure 24. Archived tower data sample.

Table 4. Index of Parameters.

INDEX	METEOROLOGICAL VARIABLE
01	W/S, 26M
02	W/S, 45M
03	W/S, 90M
04	W/S, 177M
05	W/S, 266M
06	W/S, 355M
07	W/S, 444M
08	W/S, 444M, WITH LOW PASS FILTER, F=.05HZ
09	W/D, 26M
10	W/D, 45M
11	W/D, 90M
12	W/D, 177M
13	W/D, 266M
14	W/D, 355M
15	W/D, 444M
16	T, 26M, AMBIENT MODE
17	T, 45M, DELTA MODE
18	T, 45M, DELTA MODE
19	T, 90M, DELTA MODE
20	T, 177M, DELTA MODE
21	T, 266M, DELTA MODE
22	T, 355M, DELTA MODE
23	T, 444M, AMBIENT MODE
24	SHORTED CHANNEL
25	WET BULB TEMP, 26M
26	WET BULB TEMP, 177M
27	WET BULB TEMP, 444M
28	VERTICAL VELOCITY, 26M
29	VERTICAL VELOCITY, 177M
30	VERTICAL VELOCITY, 444M
31	VERTICAL VELOCITY, 444M, WITH LOW PASS FILTER F=.05HZ
32	PRESSURE, SURFACE
33	RAINFALL
CODE	
0	DATA RELIABLE
1	DATA UNRELIABLE
2	DATA SUSPECT
3	DATA UNRELIABLE IN PART
4	DATA NOT COLLECTED THIS CHANNEL

Table 5. Quality of Data by Parameter (Percent) .

PARAMETER BY INDEX NUMBER (SEE TABLE 4)	RELIABLE 0	UNRELIABLE 1	SUSPECT 2	UNRELIABLE IN PART 3
01	99.99	.01	.00	.00
02	100.00	.00	.00	.00
03	100.00	.00	.00	.00
04	99.98	.02	.00	.00
05	100.00	.00	.00	.00
06	100.00	.00	.00	.00
07	99.95	.05	.00	.00
08	99.95	.05	.00	.00
09	78.84	21.16	.00	.00
10	100.00	.00	.00	.00
11	100.00	.00	.00	.00
12	99.98	.02	.00	.00
13	100.00	.00	.00	.00
14	100.00	.00	.00	.00
15	99.77	.23	.00	.00
16	95.26	1.60	2.82	.32
17	91.94	1.73	.00	6.33
18	93.61	.06	.00	6.33
19	93.61	.06	.00	6.33
20	93.60	.07	.00	6.33
21	93.61	.06	.00	6.33
22	93.61	.06	.00	6.33
23	93.56	.11	.00	6.33
24	NO SENSOR			
25	98.20	1.80	.00	.00
26	99.98	.02	.00	.00
27	88.63	9.44	.00	1.93
28	95.27	.01	3.85	.87
29	95.27	.01	3.85	.87
30	77.11	1.49	3.85	17.55
31	77.11	1.49	3.85	17.55
32	100.00	.00	.00	.00
33	99.99	.01	.00	.00

9.2 Analog Strip Chart Data

Table 6. Percent of All Data Falling Into Each Category

CATEGORY	PERCENT
Data Reliable	92.69
Data Unreliable	1.20
Data Suspect	3.58
Data Unreliable In Part	2.53

Continuous strip chart data for the horizontal winds are available for all seven levels. Missing data constitute less than 0.5% of the total possible data during the 90-day collection period. Strip chart data for the vertical winds are available for the 26, 177, and 444 m levels until 13 June; after 13 June only for the upper two levels. Missing data for vertical velocities constitute about 1.0% of the total possible excluding the 26 m level after 13 June. One-day pressure traces from a standard U. S. Weather Bureau barograph also are available from 25 April to 13 June. No other strip chart data are available for 1972. Strip chart data before 1972 are listed in Appendix B.

10. SOME INTERESTING METEOROLOGICAL PHENOMENA

10.1 Introduction

The type of instrumentation and the tower height make the NSSL/WKY-TV facility useful for studying frontal characteristics, low-level thunderstorm inflow and outflow, and internal wave phenomena of the stratified boundary layer. Sometimes these events occur concurrently. During the 1971 and 1972 spring seasons (an equivalent of 5 mo of data), 69 significant events of this type were recorded. Many phenomena will be discussed in subsequent studies, but for this report they are briefly summarized.

10.2 Gravity Currents

Gravity currents are shallow bodies of air near the ground associated with fronts and thunderstorm outflow. There are several laboratory models (Bata and Bogish, 1953; Middleton, 1966; Keulegan, 1958; and others), and Charba (1972) has used data from this tower in a recent case study. Colmer (1971) has studied the characteristics of the leading edge of the current (gust front). A case similar to Charba's illustrated in Fig. 25 shows a gravity current associated with an unbroken line of thunderstorms oriented approximately east to west and propagating toward the south. The diagram, crudely taken as a time-to-space conversion, shows two surges of cold air passing the tower at 1905 and 1922 CST. Solid isopleths are lines of constant lapse rate that help delineate the inversion position. The vertical velocity is plotted at 177 and 444 m; zero vertical velocity is the straight line drawn at the two heights; strong updrafts and downdrafts are indicated with plus (+) and minus (-). Since the squall line was oriented east to west, pre-storm flow had a dominant southerly component. Following the leading edge of the outflow, the low-level flow was mostly northerly except in the head where the wind was east or northeast along the frontal axis. The wind shift line (dotted line

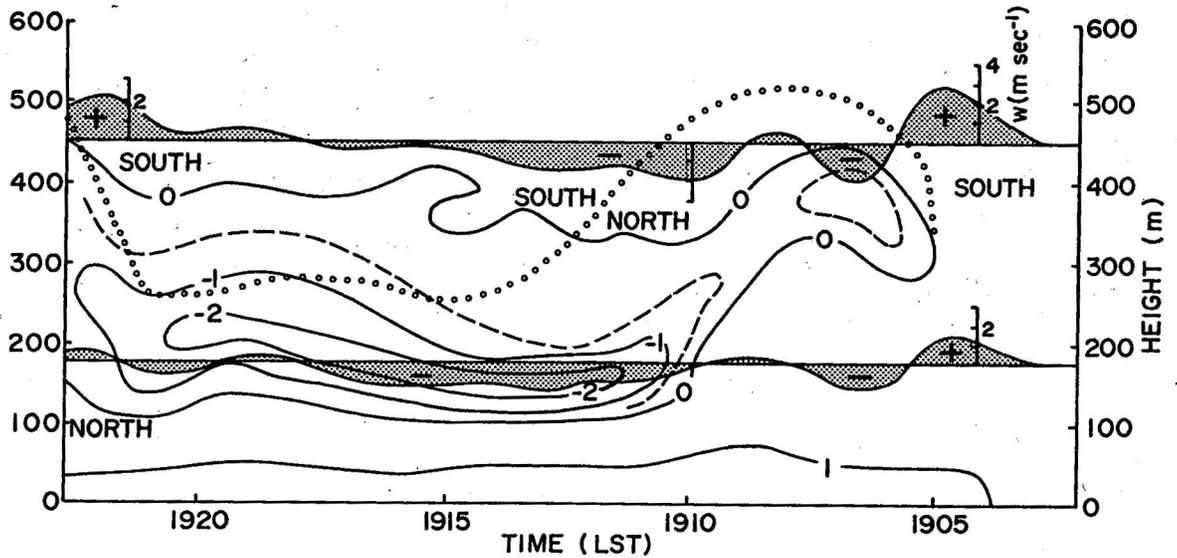


Figure 25. Gravity current associated with a squall line. Vertical velocity plotted at 177 and 444 m (stippled). Winds with north or south components separated by (ooo) line. Lapse rate ($C 10^{-2} m^{-1}$) solid isolines.

representing an east wind) shows the shallow character of this outflow current.

The two currents at 1905 and 1922 are believed to indicate sudden intensification; i.e., with each cycle of intensification, a new current surges ahead of the squall line. A future study will seek to verify this and discuss turbulence characteristics behind the head with interaction and general characteristics of gust fronts.

10.3 Cold Front Passages

Most fast-moving cold fronts appear quasi-vertical in the tower layer. Occasionally a cold front has a much shallower slope. This seems more likely when the fronts are moving very slowly. Such an event is shown in Fig. 26. The frontal configuration illustrated is midway between the more frequent quasi-vertical front and the gravity current discussed in Section 10.1. The diagram shows small-scale waves along the frontal surface. These may be attributed to tower effects. However, much longer period (~ 5 to 10 min) wave forms of a meteorological nature have been observed on these shallow sloped fronts.

10.4 Hydraulic (Pressure) Jumps

If the atmosphere, composed of two fluids of different density (in a stable configuration), is impulsively perturbed, a hydraulic, or pressure, jump occurs (Tepper, 1950). Pressure jumps appear as a sudden lifting of an inversion. Figure 27 may be such a pressure jump; here the inversion, initially at 300 m, is suddenly lifted about 200 to 250 m, and thereafter the height fluctuates with a period of 7 to 9 min. Tower observations were extrapolated up some 250 m.

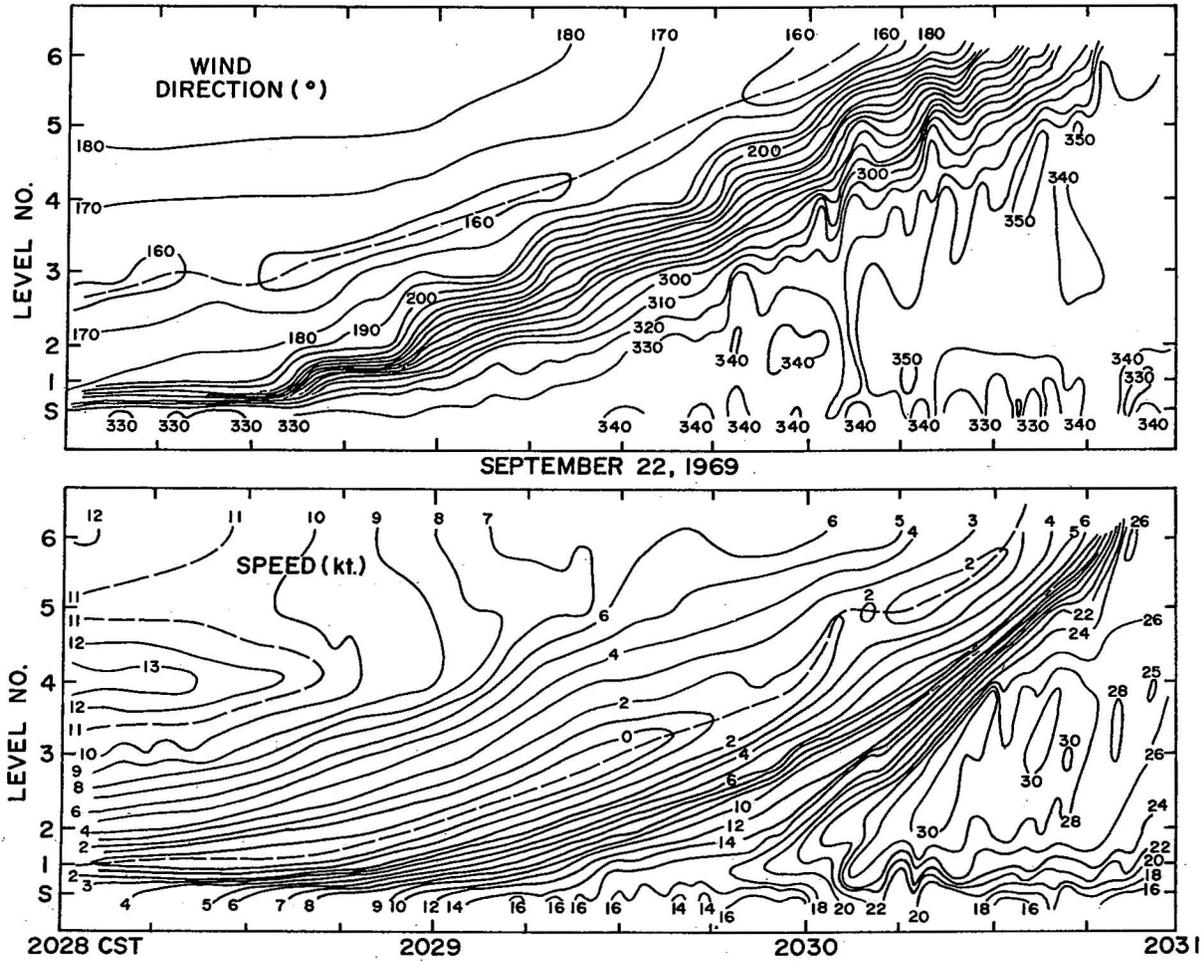


Figure 26. Diagram of shallow cold front (from Sanders, unpublished).

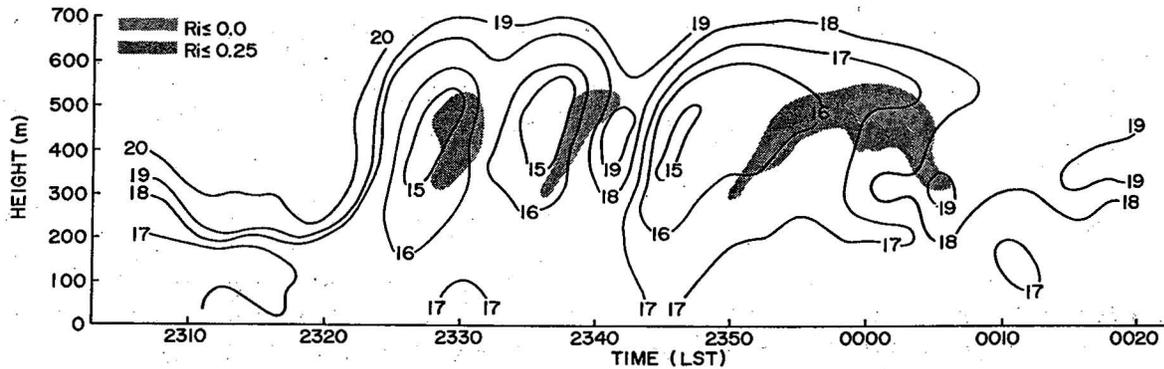


Figure 27. Boundary layer profile of pressure jump. Isolines of temperature (C)

10.5 Shear-Gravity Waves

In a stratified atmosphere with strong wind shear, the Richardson number may be sufficiently low such that Kelvin-Helmholtz waves are generated. Several studies of such waves used sensitive radars (Atlas *et al.*, 1969; Browning, 1971; Gossard *et al.*, 1970). A case of shear-gravity waves is illustrated in Fig. 28 (a and b). Shallow dense air behind a thunderstorm has created a strong inversion. There is strong wind shear evident in the accompanying hodograph (Fig. 29). The data in the time-height section have been smoothed somewhat, but even the unsmoothed data are nearly periodic between 0313 and 0321 CST. Notice that the period of these waves is much smaller than those in Fig. 28. Shear-generated waves generally have smaller periods than other mechanically induced fluctuations, although no conclusive statements can be made about their wavelengths with point source data.

10.6 Mesoscale Spectra

The 90-day data sample collected in 1972 will be used to determine the mesoscale kinetic energy spectrum during a typical spring season. Spectra from individual storm days will be compared with the spectrum from the larger sample. Occasionally there is a considerable amount of horizontal kinetic energy in the mesoscale portion of the horizontal wind spectrum (from periods of 30 min to 24 hr; normally an energy weak region) as compared with, say, the Van der Hoven (1957) or Vinnechenko (1970) spectrum in the same frequency range.

11. SUMMARY AND CONCLUSIONS

A 3-mo sample of nearly continuous data was collected at the NSSL/WKY-TV tower. About half of the data was collected at a 1-min sampling rate. The remainder was collected at a 10-sec sampling rate. The sample probably is unique, because there are few instrumented towers as tall as the WKY tower. Over 90% of the data is considered reliable, i.e., within the tolerances set by quality control procedures.

In 1972 we emphasized electronically digitized data rather than data collected on strip charts. This "improvement" produced several new problems: recording on tape did not allow on-site inspection of the data; at slow sampling rates several days normally elapsed before the tape was removed and data could be checked; the data acquisition system was subject to frequent breakdown (on occasion the malfunction was not detected until the raw data were first inspected); and computer facilities were not adequate for quick processing, although they were improved over previous years.

Some problems were not related to the data collection method. The height of the tower and adverse weather conditions occasionally prevented the immediate repair of faulty equipment. In spite of some handicaps, the spring program was considered a success since data were collected during more than half a dozen thunderstorms and many other mesoscale events.

To save on maintenance costs, reduce manpower needs and improve data, a new recording system was located at NSSL in 1973 with data telemetered from the tower to NSSL over telephone lines. Several tower functions are now

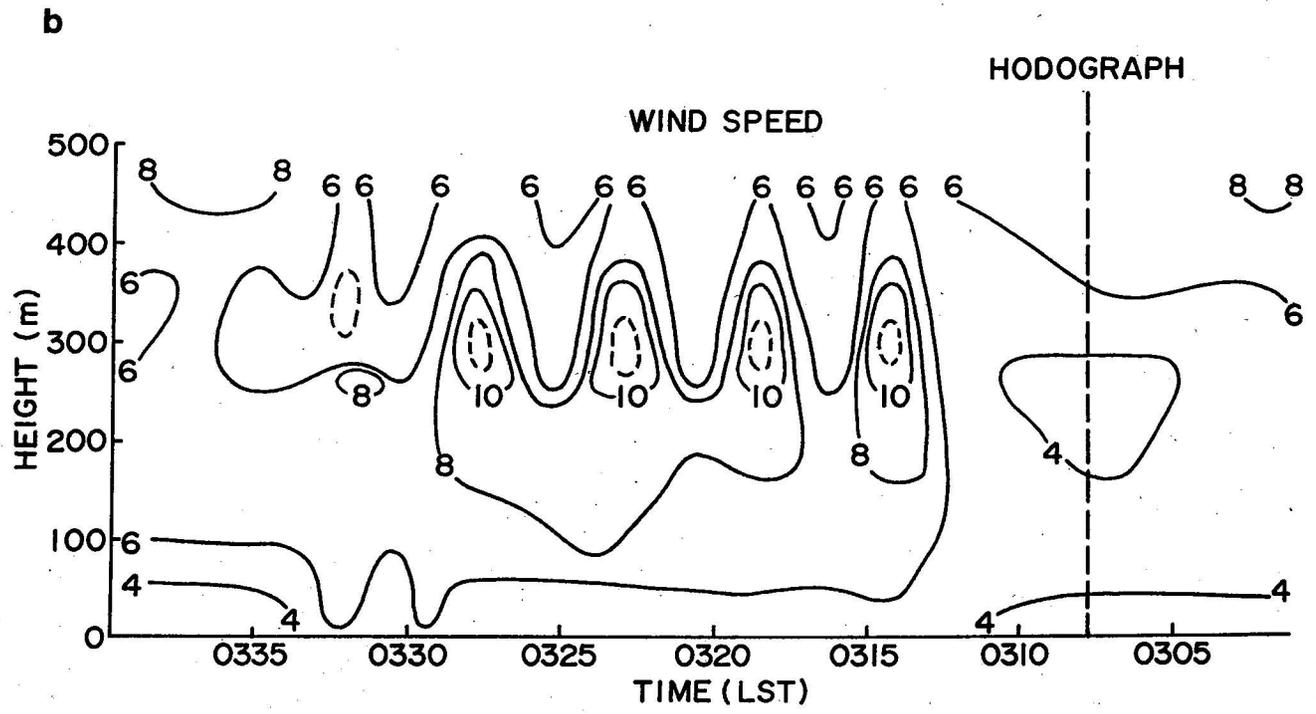
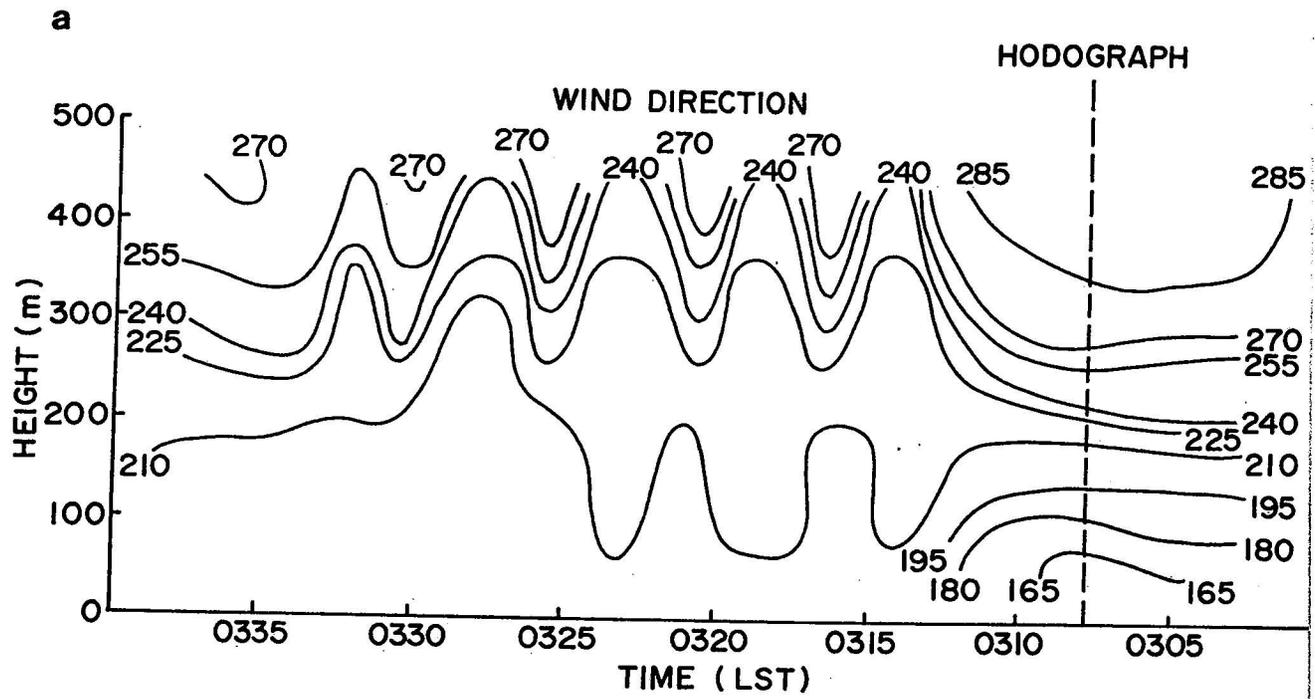


Figure 28. Time/height section of the tower layer showing shear gravity waves. (a) wind direction ($^{\circ}$), (b) wind speed (m sec^{-1}).

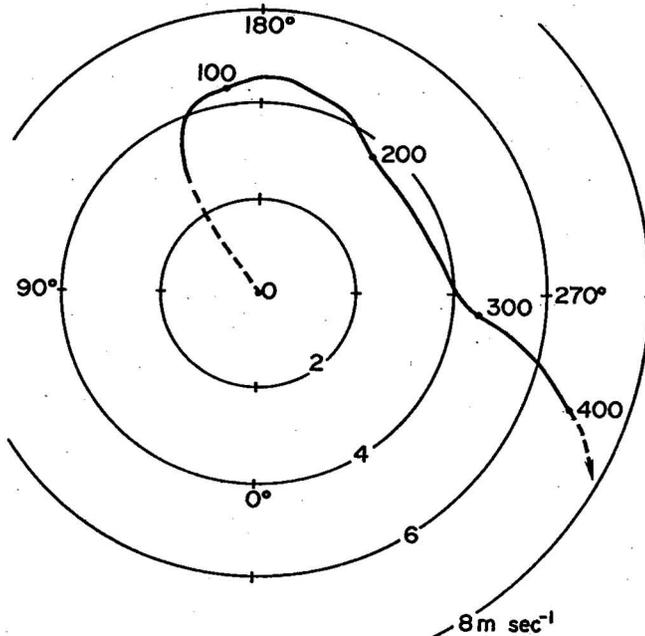


Figure 29. Hodograph of tower layer during shear gravity wave occurrences.

operated by remote control. The new processor streamlines collecting and processing the data and will enhance our research capabilities.

12. ACKNOWLEDGMENTS

The authors appreciate the conscientious efforts of L. Dale Sanders (CEDDA), J. Carter (NSSL), and L. Johnson (NSSL) who were responsible for the design, construction and operation of the tower facility; and M. Weible (NSSL) who assisted in computer data processing.

The National Aeronautics and Space Administration (NASA) provided financial assistance to the tower program from the project's inception.

13. REFERENCES

- Atlas, D., J. I. Metcalf, J. H. Richter and E. E. Gossard (1970): The birth of "CAT" and microscale turbulence. Jour. of Atmos. Sci., 27, 903-913.
- Bata, G. and K. Bogish (1953): Some observations on density currents in the laboratory and in the field. Proceedings of the Minnesota International Hydraulics Conference, Univ. of Minnesota, 387 pp.
- Blackadar, A. K. (1957): Boundary layer wind maxima and their significance for the growth of nocturnal inversions. Bulletin of the Amer. Meteor. Soc., 38, 283-290.

- Browning, K. A. (1971): Structure of the atmosphere in the vicinity of large amplitude Kelvin-Helmholtz billows. Quar. Jour. of the Royal Meteor. Soc. 97, 283-299.
- Carter, J. K. (1970): The meteorologically instrumented WKY-TV tower facility. NOAA Tech. Memo. ERL NSSL-62, Norman, Oklahoma, 60 pp.
- Charba, J. (1972): Gravity current model applied to analysis of squall-line gust front. Ph.D. Dissertation, Univ. of Oklahoma, 62 pp.
- Charba, J. and Y. Sasaki (1968): Structure and movement of the severe thunderstorms of 3 April 1964 as revealed from radar and surface data analysis. NOAA Tech. Memo. ERL NSSL-41, 74 pp.
- Colmer, M. J. (1971): On the character of thunderstorm gust fronts: Proceedings of RAES/CASI/AIAA Conference on Atmospheric Turbulence, London
- Crawford, K. C. and H. R. Hudson (1970): Behavior of the winds in the lowest 1500 ft in central Oklahoma: June 1966 - May 1967. NOAA Tech. Memo. ERL NSSL-48, 57 pp.
- Elderkin, C. E., D. C. Powell, A. G. Dunbar and T. W. Horst (1972): Take-off and landing critical atmospheric turbulence (Tolcat) - experiment and analysis. AFFDL-TR-71-172, 283 pp.
- Gill, G. C., and P. T. Hexter (1972): Some instrument definitions for use by meteorologists and engineers. Bulletin of the Amer. Meteor. Soc., 53, 846-851.
- Gill, G. C., L. E. Olson, and M. Suda (1966): Errors in measurement of wind speed and direction made with tower or stack-mounted instruments. Report 06973-1-P on Public Health Service Grant No. AP-00233-03, Depart. of Meteor. and Oceanography, Univ. of Michigan, Ann Arbor, Michigan, 89 pp.
- Goff, R. C. and H. R. Hudson (1972): The thermal structure of the lowest half kilometer in central Oklahoma: December 9, 1966 - May 31, 1967. NOAA Tech. Memo. ERL-NSSL-58, 53 pp.
- Gossard, E. E., J. H. Richter, and D. Atlas (1970): Internal waves in the atmosphere from high resolution radar measurements. Jour. of Geo. Res., 75, 3523-3536.
- Keulegan, G. H. (1958): 12th progress report on model laws for density currents, the motion of saline fronts in still water. U. S. National Bureau of Standards Report No. 5831, 28 pp.
- Lumley, J. L., and H. A. Panofsky (1964): The structure of atmospheric turbulence, John Wiley and Sons, New York, 239 pp.
- Middleton, G. V. (1966): Experiments on density and turbidity currents I: Motion of the head. Canadian Jour. of Earth Sci., 3, 523-546.

- Peterson, E. W. (1972): Relative importance of terms in the turbulent energy and momentum equations as applied to the problem of a surface roughness change. Jour. of Atmos. Sci., 29, 1470-1476.
- Sanders, Leslie D. and Allen H. Weber (1970): Evaluation of roughness lengths at the NSSL-WKY-TV meteorological tower. NOAA Tech. Memo. ERL-NSSL-47, 24 pp.
- Tennekes, H. (1973): The logarithmic wind profile. Jour. of Atmos. Sci., 30, 234-238.
- Tepper, M. (1950): A proposed mechanism of squall lines: the pressure jump line. Jour. of Meteor., 7, 21-29.
- U. S. Dept. of Commerce (1966): Report of calibration. National Bureau of Standards, Institute for Basic Standards, Washington, D. C.
- Van der Hoven, I. (1957): Power spectrum of horizontal wind speed in the frequency range from 0.0007 to 900 cycles per hour. Jour. of Meteor., 14, 160-164.
- Vinnechenko, N. K. (1970): The kinetic energy spectrum in the free atmosphere. Tellus, 22, 153-166.

APPENDIX A

ARCHIVE TAPE INFORMATION
(1969-1971)⁸

Collection Period: 24 October - 30 December 1969

Mode: Digital data collected at 2 sec rates for first 5 min of each hour.

Remarks: Some wind direction data in error; wind speed noisy.

Record Length: 87 characters.

COLUMN	TAPE FORMAT*	DATA
1	1X	Blank
2-7	3I2	Month, day, year
8-13	3I2	Hour, minute, second
14-34	7F3.1	Wind speed (kt) 7 levels
35-55	7F3.0	Wind direction (°) 7 levels
56-87	8F3.0	Temperature (C) 7 levels**

*Tape format indicates position of decimal. Archive tape in I-format.

**2 sensors at surface level.

NSSL				
TAPE NO.	DATE ON	TIME ON	DATE OFF	TIME OFF
SLO426	24 Oct	160001	27 Oct	100459
SLO428	27 Oct	120003	5 Nov	130459
SLO601	7 Nov	110001	10 Nov	080459
SLO440	14 Nov	090001	21 Nov	100459
SLO580	21 Nov	120005	28 Nov	090459
SLO582	28 Nov	120001	5 Dec	080459
SLO263	5 Dec	160001	9 Dec	090459
SLO258	9 Dec	160001	15 Dec	140459
SLO293	15 Dec	150001	19 Dec	080459
SLO295	19 Dec	090001	22 Dec	114550
SLO386	22 Dec	130001	26 Dec	080459
SLO419	26 Dec	090001	30 Dec	160359

⁸Information for the 1972 data set appears in the text.

Collection Period: 22 April - 12 October 1970

Mode: Digital data collected at 2 or 10 sec rates

Remarks: Questionable data and negative temperatures are specially coded.
Code available upon request.

Record Length: 128 characters

COLUMN	TAPE FORMAT*	DATA
1-6	3I2	Month, day, year
7-12	3I2	Hour, minute, second
13-15	F3.2	Calibration voltage (V)
16-36	7F3.1	Aerovane wind speed (kt) 7 levels
37-57	7F3.0	Aerovane wind direction (°) 7 levels
58-78	7F3.1	Cup anemometer wind speed (kt) 7 levels
79-81	F3.2	Calibration voltage (V)
82-89	2F4.1	Vertical wind (kt) 444m
90-92	F3.1	Pyranometer (ly min^{-1}) sfc
93-95	F3.0	Relative humidity (%) sfc
96-127	8F4.2	Temperature (C) 7 levels**
128	I1	Channel change indicator

*Tape format indicates position of decimal. Archive tape in I-format.

**2 sensors at surface level.

NSSL				
TAPE NO.	DATE ON	TIME ON	DATE OFF	TIME OFF
SL0194	22 Apr	080001	30 Apr	230100
SL0441	1 May	000000	11 May	215040
SL0442	11 May	215050	15 May	134350
SL0216	15 May	134400	28 May	181430
SL0219	28 May	181530	30 May	045630
SL0018	1 Jun	000000	9 Jun	213230
SL0043	9 Jun	213300	13 Jun	083600
SL0215	13 Jun	083602	23 Jun	225800
SL0218	23 Jun	225900	30 Jun	235900
SL0348	1 Jul	000500	14 Jul	220430
SL0431	14 Jul	220530	23 Jul	114910
SL0351	27 Aug	153100	7 Sep	211505
SL0508	7 Sep	211515	24 Sep	033130
SL0044	24 Sep	033230	30 Sep	235930
SL0433	1 Oct	000030	12 Oct	114330

Collection period: 6 May - 1 July 1971

Mode: Digital data collected at 10 sec rates on potential storm days.

Remarks: All 9's and 8's in any field indicates data missing.

Record Length: 131 characters

COLUMN	TAPE FORMAT*	DATA
1-6	3I2	Month, day, year
7-12	3I2	Hours, minutes, seconds
13-42	10F3.1	Wind speed (m sec^{-1}) 7 levels**
43-63	7F3.0	Wind direction ($^{\circ}$) 7 levels
64-95	8F4.2	Temperature (C) 7 levels***
96-110	3F5.2	Vertical wind (m sec^{-1}) sfc, 444m
111-116	2F3.0	Relative humidity (%) sfc, 444m
117-119	F3.2	Pyranometer (ly min^{-1}) sfc
120-124	F5.1	Station pressure (mb) sfc
125-127	F3.2	Raingage (inch) sfc
128-130	I3	Channel indicator
131	I1	Channel change indicator

*Tape format indicates position of decimal. Archive tape in I-format.

**Wind speed electronically filtered at sfc, 177 and 444m (breakpoint 0.5 Hz).

Filtered data follows unfiltered data in sequence.

***2 sensors at surface level.

NSSL				
TAPE NO.	DATE ON	TIME ON	DATE OFF	TIME OFF
SLO745	4 May	191015	15 May	154950
SLO968	17 May	160000	23 May	103150
SLO036	23 May	103200	30 May	113000
SLO798	30 May	113010	3 Jun	152850
SLO242	7 Jun	160000	12 Jun	201550
SLO528	12 Jun	201620	1 Jul	072625
SLO784****	18 Jun	133504	18 Jun	143448

****2 sec data.

APPENDIX B
ANALOG STRIP CHART DATA
(1966-1971)

DATE ON	DATE OFF	PARAMETER ³	HEIGHT OF SENSORS (m)	REMARKS
1 Jun 1966	31 May 1967	U, α	Sfc, 44, 89, 177, 266, 355, 444 ¹	For climatological study
9 Dec 1966	31 May 1967	T	Sfc, 44, 89, 177, 266, 355, 444	For climatological study
1 Apr 1968	Sep-Oct 1968	U, α	Sfc, 44, 89, 177, 266, 355, 444	Spring Storm Project
1 Apr 1968	Sep-Oct 1968	T	Sfc, 44, 89, 177, 266, 355, 444	Spring Storm Project
10 Apr 1969	18 Jul 1969	U, α	Sfc, 44, 89, 177, 266, 355, 444	Spring Storm Project
10 Apr 1969	18 Jul 1969	T	Sfc, 44, 89, 177, 266, 355, 444	Spring Storm Project
8 Dec 1969	8 Apr 1970	T	444	Test
22 Dec 1969	8 Apr 1970	T	Sfc, 44, 89, 177, 266, 355, 444	Test
29 Dec 1969	17 Aug 1970	U, α		Spring Storm Project and Special Projects
29 Apr 1970	27 Jul 1970	T	Sfc, 44, 89, 177, 266, 355, 444	Spring Storm Project
4 May 1970	6 Jul 1970	w	444	Spring Storm Project
24 Aug 1970	12 Oct 1970	U, α	Sfc, 44, 89, 177, 266, 355, 444	Special Project
24 Aug 1970	12 Oct 1970	T	Sfc, 44, 89, 177, 266, 355, 444	Special Project
10 Sep 1970	12 Oct 1970	w	266, 444	Special Project
16 Apr 1971	1 Jul 1971	U, α	Sfc, 44, 89, 177, 266, 355, 444	Spring Storm Project
19 Apr 1971	1 Jul 1971	T	26, 44, 89, 177, 266, 355, 444 ²	Spring Storm Project
19 Apr 1971	1 Jul 1971	w	26, 444	Spring Storm Project
20 Sep 1971	18 Oct 1971	U, α	26, 44, 89, 177, 266, 355, 444	Special Project
22 Sep 1971	15 Oct 1971	T	26, 44, 89, 177, 266, 355, 444	Special Project
18 Oct 1971	16 Nov 1971	U, α	26, 44, 89, 177, 266, 355, 444	Special Project
18 Oct 1971	16 Nov 1971	T	26, 44, 89, 177, 266, 355, 444	Special Project

¹Surface data were recorded at a site 75 m WNW of the tower base. Wind sensor 7 m; temperature sensor 2m.

²A new level at 26 m was added to the tower for 1971 replacing the surface data.

³See Table of Symbols.

NATIONAL SEVERE STORMS LABORATORY

The NSSL Technical Memoranda, beginning with No. 28, continue the sequence established by the U. S. Weather Bureau National Severe Storms Project, Kansas City, Missouri. Numbers 1-22 were designated NSSL Reports. Numbers 23-27 were NSSL Reports, and 24-27 appeared as subseries of Weather Bureau Technical Notes. These reports are available from the National Technical Information Service, Operations Division, Springfield, Virginia 22151, for \$3.00, and a microfiche version for \$0.95. NTIS numbers are given below in parentheses.

- No. 1 National Severe Storms Project Objectives and Basic Design. Staff, NSSL. March 1961. (PB-168207)
- No. 2 The Development of Aircraft Investigations of Squall Lines from 1956-1960. B. B. Goddard. (PB-168208)
- No. 3 Instability Lines and Their Environments as Shown by Aircraft Soundings and Quasi-Horizontal Traverses. D. T. Williams. February 1962. (PB-168209)
- No. 4 On the Mechanics of the Tornado. J. R. Fulks. February 1962. (PB-168210)
- No. 5 A Summary of Field Operations and Data Collection by the National Severe Storms Project in Spring 1961. J. T. Lee. March 1962. (PB-165095)
- No. 6 Index to the NSSL Surface Network. T. Fujita. April 1962. (PB-168212)
- No. 7 The Vertical Structure of Three Dry Lines as Revealed by Aircraft Traverses. E. L. McGuire. April 1962. (PB-168213)
- No. 8 Radar Observations of a Tornado Thunderstorm in Vertical Section. Ralph J. Donaldson, Jr. April 1962. (PB-174859)
- No. 9 Dynamics of Severe Convective Storms. Chester W. Newton. July 1962. (PB-163319)
- No. 10 Some Measured Characteristics of Severe Storms Turbulence. Roy Steiner and Richard H. Rhyne. July 1962. (N62-16401)
- No. 11 A Study of the Kinematic Properties of Certain Small-Scale Systems. D. T. Williams. October 1962. (PB-168216)
- No. 12 Analysis of the Severe Weather Factor in Automatic Control of Air Route Traffic. W. Boynton Beckwith. December 1962. (PB-168217)
- No. 13 500-Kc./Sec. Sferics Studies in Severe Storms. Douglas A. Kohl and John E. Miller. April 1963. (PB-168218)
- No. 14 Field Operations of the National Severe Storms Project in Spring 1962. L. D. Sanders. May 1963. (PB-168219)
- No. 15 Penetrations of Thunderstorms by an Aircraft Flying at Supersonic Speeds. G. P. Roys: Radar Photographs and Gust Loads in Three Storms of 1961 Rough Rider. Paul W. J. Schumacher. May 1963. (PB-168220)
- No. 16 Analysis of Selected Aircraft Data from NSSL Operations, 1962. T. Fujita. May 1963. (PB-168221)
- No. 17 Analysis of Methods for Small-Scale Surface Network Data. D. T. Williams. August 1963. (PB-168222)
- No. 18 The Thunderstorm Wake of May 4, 1961. D. T. Williams. August 1963. (PB-168223)
- No. 19 Measurements by Aircraft of Condensed Water in Great Plains Thunderstorms. George P. Roys and Edwin Kessler. July 1966. (PB-173048)
- No. 20 Field Operations of the National Severe Storms Project in Spring 1963. J. T. Lee, L. D. Sanders and D. T. Williams. January 1964. (PB-168224)
- No. 21 On the Motion and Predictability of Convective Systems as Related to the Upper Winds in a Case of Small Turning of Wind with Height. James C. Fankhauser. January 1964. (PB-168225)
- No. 22 Movement and Development Patterns of Convective Storms and Forecasting the Probability of Storm Passage at a Given Location. Chester W. Newton and James C. Fankhauser. January 1964. (PB-168226)
- No. 23 Purposes and Programs of the National Severe Storms Laboratory, Norman, Oklahoma. Edwin Kessler. December 1964. (PB-166675)
- No. 24 Papers on Weather Radar, Atmospheric Turbulence, Sferics, and Data Processing. August 1965. (AD-621586)
- No. 25 A Comparison of Kinematically Computed Precipitation with Observed Convective Rainfall. James C. Fankhauser. September 1965. (PB-168445).

- No. 26 Probing Air Motion by Doppler Analysis of Radar Clear Air Returns. Roger M. Lhermitte. May 1966. (PB-170636)
- No. 27 Statistical Properties of Radar Echo Patterns and the Radar Echo Process. Larry Armijo. May 1966. The Role of the Kutta-Joukowski Force in Cloud Systems with Circulation. J. L. Goldman. May 1966. (PB-170756)
- No. 28 Movement and Predictability of Radar Echoes. James Warren Wilson. November 1966. (PB-173972)
- No. 29 Notes on Thunderstorm Motions, Heights, and Circulations. T. W. Harrold, W. T. Roach, and Kenneth E. Wilk. November 1966. (AD-644899)
- No. 30 Turbulence in Clear Air Near Thunderstorms. Anne Burns, Terence W. Harrold, Jack Burnham, and Clifford S. Spavins. December 1966. (PB-173992)
- No. 31 Study of a Left-Moving Thunderstorm of 23 April 1964. George R. Hammond. April 1967. (PB-174681)
- No. 32 Thunderstorm Circulations and Turbulence from Aircraft and Radar Data. James C. Fankhauser and J. T. Lee. April 1967. (PB-174860)
- No. 33 On the Continuity of Water Substance. Edwin Kessler. April 1967. (PB-175840)
- No. 34 Note on the Probing Balloon Motion by Doppler Radar. Roger M. Lhermitte. July 1967. (PB-175930)
- No. 35 A Theory for the Determination of Wind and Precipitation Velocities with Doppler Radars. Larry Armijo. August 1967. (PB-176376)
- No. 36 A Preliminary Evaluation of the F-100 Rough Rider Turbulence Measurement System. U. O. Lappe. October 1967. (PB-177037)
- No. 37 Preliminary Quantitative Analysis of Airborne Weather Radar. Lester P. Merritt. December 1967. (PB-177188)
- No. 38 On the Source of Thunderstorm Rotation. Stanley L. Barnes. March 1968. (PB-178990)
- No. 39 Thunderstorm - Environment Interactions Revealed by Chaff Trajectories in the Mid-Troposphere. James C. Fankhauser. June 1968. (PB-179659)
- No. 40 Objective Detection and Correction of Errors in Radiosonde Data. Rex L. Inman. June 1968. (PB-180284)
- No. 41 Structure and Movement of the Severe Thunderstorms of 3 April 1964 as Revealed from Radar and Surface Mesonetwork Data Analysis. Jess Charba and Yoshikazu Sasaki. October 1968. (PB-183310)
- No. 42 A Rainfall Rate Sensor. Brian E. Morgan. November 1968. (PB-183979)
- No. 43 Detection and Presentation of Severe Thunderstorms by Airborne and Ground-Based Radars: A Comparative Study. Kenneth E. Wilk, John K. Carter, and J. T. Dooley. February 1969. (PB-183572)
- No. 44 A Study of a Severe Local Storm of 16 April 1967. George Thomas Haglund. May 1969. (PB-184-970)
- No. 45 On the Relationship Between Horizontal Moisture Convergence and Convective Cloud Formation. Horace R. Hudson. March 1970. (PB-191720)
- No. 46 Severe Thunderstorm Radar Echo Motion and Related Weather Events Hazardous to Aviation Operations. Peter A. Barclay and Kenneth E. Wilk. June 1970. (PB-192498)
- No. 47 Evaluation of Roughness Lengths at the NSSL-WKY Meteorological Tower. Leslie D. Sanders and Allen H. Weber. August 1970. (PB-194587)
- No. 48 Behavior of Winds in the Lowest 1500 ft in Central Oklahoma: June 1966 - May 1967. Kenneth C. Crawford and Horace R. Hudson. August 1970.
- No. 49 Tornado Incidence Maps. Arnold Court. August 1970. (COM-71-00019)
- No. 50 The Meteorologically Instrumented WKY-TV Tower Facility. John K. Carter. September 1970. (COM-71-00108)
- No. 51 Papers on Operational Objective Analysis Schemes at the National Severe Storms Forecast Center. Rex L. Inman. November 1970. (COM-71-00136)
- No. 52 The Exploration of Certain Features of Tornado Dynamics Using a Laboratory Model. Neil B. Ward. November 1970. (COM-71-00139)
- No. 53 Rawinsonde Observation and Processing Techniques at the National Severe Storms Laboratory. Stanley L. Barnes, James H. Henderson and Robert J. Ketchum. April 1971. (COM-71-00707)

- No. 54 Model of Precipitation and Vertical Air Currents. Edwin Kessler and William C. Bumgarner. June 1971. (COM-71-00911)
- No. 55 The NSSL Surface Network and Observations of Hazardous Wind Gusts. Operations Staff. June 1971. (COM-71-00910)
- No. 56 Pilot Chaff Project at the National Severe Storms Laboratory. Edward A. Jessup. November 1971. (COM-72-10106)
- No. 57 Numerical Simulation of Convective Vortices. Robert P. Davies-Jones and Glenn T. Vickers. November 1971. (COM-72-10269)
- No. 58 The Thermal Structure of the Lowest Half Kilometer in Central Oklahoma: December 9, 1966 - May 31, 1967. R. Craig Goff and Horace R. Hudson. July 1972. (COM-72-11281)
- No. 59 Cloud-to-Ground Lightning Versus Radar Reflectivity in Oklahoma Thunderstorms. Gilbert D. Kinzer. September 1972. (COM-73-10050)
- No. 60 Simulated Real Time Displays of Velocity Fields by Doppler Radar. L. D. Hennington and G. B. Walker. November 1972. (COM-73-10515)
- No. 61 Gravity Current Model Applied to Analysis of Squall-Line Gust Front. Jess Charba. November 1972. (COM-73-10410)
- No. 62 Mesoscale Objective Map Analysis Using Weighted Time-Series Observations. Stanley L. Barnes. March 1973. (COM-73-10781)
- No. 63 Observations of Severe Storms on 26 and 28 April 1971. Charles L. Vitek. April 1973. (COM-73-11200)
- No. 64 Meteorological Radar Signal Intensity Estimation. Dale Simans and R. J. Doviak. September 1973. (COM-73-11923/2AS)
- No. 65 Radiosonde Altitude Measurement Using Double Radiotheodolite Techniques. Stephan P. Nelson. September 1973. (COM-73-11934/9AS)
- No. 66 The Motion and Morphology of the Dryline. Joseph T. Schaefer. September 1973. (COM-74-10043)
- No. 67 Radar Rainfall Pattern Optimizing Technique. Edward A. Brandes. March 1974.